
FED. SUP CLASS
5120

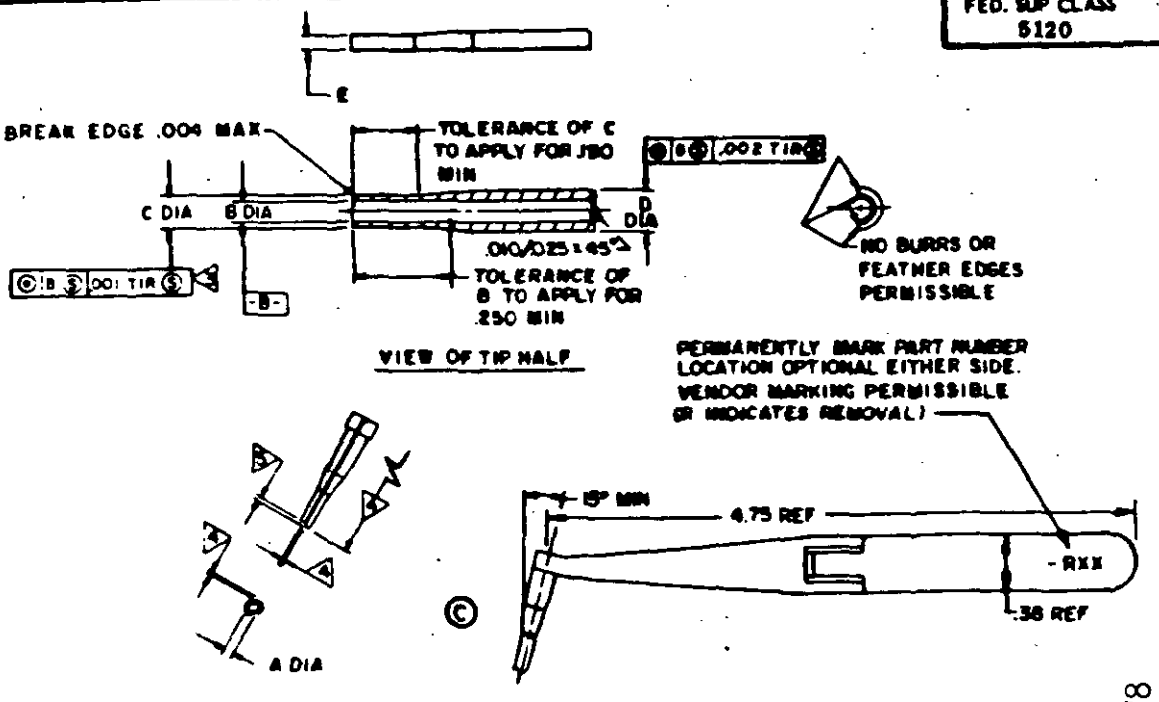

MS Part number	Size	Color code See note 8		A Dia ±.0002	B Dia +.001 -.000	C Dia +.000 -.001	D Dia ±.003	E		H Dia +.0002 -.0000	J Dia ±.0002
		No. 1	No. 2								
MS27495R22M	22D 22M	Black	White	.0800	.090	.084	.113	.032	+.000 -.001	.0845	.0480
MS27495R22	22	Brown	White	.0600	.080	.074	.113	.037	+.000 -.001	.0745	.0580
MS27495R20	20	Red	White	.0710	.077	.097	.113	.0685	+.0000 -.0010	.0975	.0750
MS27495R16	16	Blue	White	.1090	.109	.135	.138	.0875	+.0000 -.0010	.1355	.1070
MS27495R12	12	Yellow	White	.1550	.155	.188	.188	.0980	+.0000 -.0010	.1925	.1530

NOTES:
1. If tips are manufactured in mated pairs, indicated dimensions do not apply but must be equal within .006.
2. E dimension to apply for length of .200 min.
3. Concentricity to be maintained for a length of .250 min.
4. With tips closed around an A dia. pin, the tips shall align themselves within .001 throughout the .544 ± .010 length and clearance between the tips shall be .000 - .003 for a length of .200 ± .010.
5. With the tips in the normal closed position, the tips shall end align within .005.
6. Allowing for the flexibility of the tips, they shall enter a ring gage of H dia. to a depth of .187 min. with the tips in the ring gage a pin of J dia. shall enter the tips to a depth of .250 min.
7. Surface on exterior of tips to be 16 max.
8. Color band, if used, to be enamel paint or equivalent. Code No. 1 indicates tool size, code No. 2 indicates removal tool.
9. Material - tips: Steel SAE 4130, AMS 6370, or equivalent. Tweezers: Steel, reverse action with box joint to insure note 5. Stainless or treated to resist corrosion.
10. Reference documents shall be the issue in effect on date of invitation for bids. This standard takes precedence over documents referenced herein.
© 11. Cadmium plating shall not be us as a coating or finish.

© denotes changes

CANCELLED - FOR PROCUREMENT USE - MIL-I-81969/8

APPROVED 1 Aug 67 REVISED (B) 7 Jul 71 (C) 9 Feb 76 (D) 6 Dec 85

User activities: Army - Navy - Air Force -
Review activities: Army - Navy - Air Force - EC
DSA-ES
11, 15, 80

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A	84		TITLE	MILITARY STANDARD
Other Cust	EL AS 85		TOOL, CONTACT, CONNECTOR ASSEMBLY AND DISASSEMBLY	MS 27495
Procurement Specification: MIL-C-38999			SUPERSEDES:	PAGE 1 OF 3


DD FORM MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5120-0861

SHOOT FRONT ONLY S/C


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.

User activities: Army - Navy - Air Force -
Army - Navy - Air Force - 11, 15, 80
DSA - ES
Review activities: Army - Navy - Air Force - EC
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

FED. SUP CLASS 5120

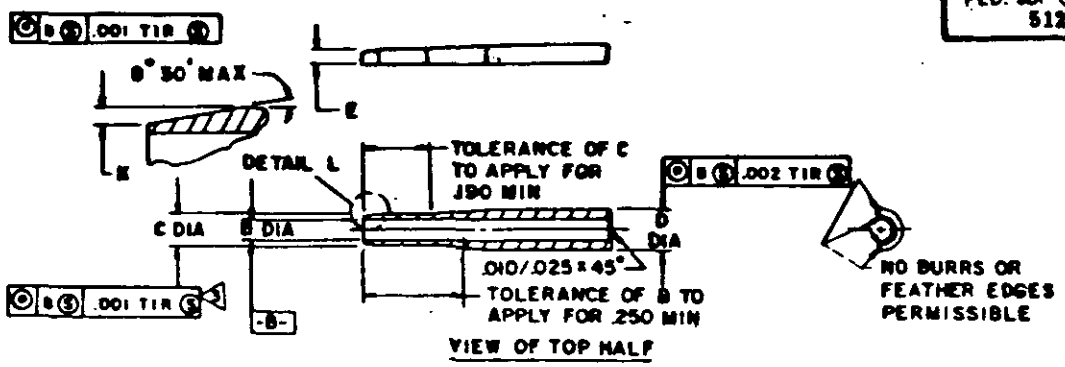

VIEW OF TOP HALF

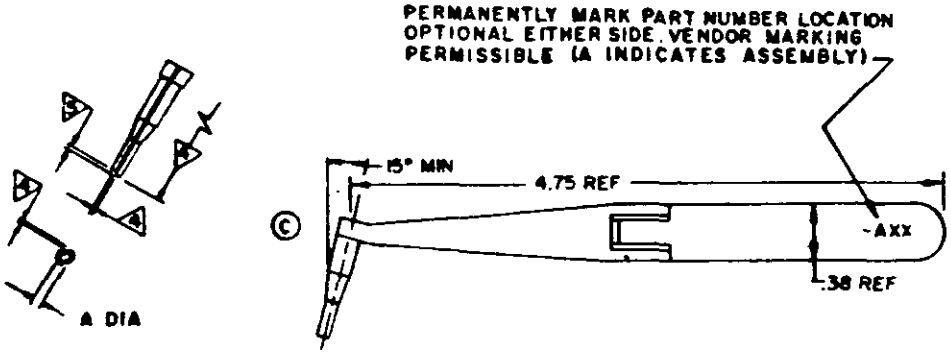

MS Part number	Size	Color code See note 8	A Dia ±.0002	B Dia +.001 -.000	C Dia +.000 -.001	D Dia ±.003	E +.0000 -.0020	H Dia +.0002 -.0000	J Dia ±.0002	K
MS27495A22M	22M	Black	.0500	.050	.064	.113	.0290	.0645	.0480	.004 .006
MS27495A22	22	Brown	.0600	.060	.074	.113	.0340	.0745	.0580	.004 .006
MS27495A20	20	Red	.0770	.077	.097	.113	.0455	.0975	.0750	.006 .008
MS27495A16	16	Blue	.1090	.109	.135	.138	.0645	.1355	.1070	.008 .011
MS27495A12	12	Yellow	.1550	.155	.192	.195	.0930	.1925	.153	.013 .016

NOTES:
1. If tips are manufactured in mated pairs, indicated dimensions do not apply but must be equal within .006.
2. E dimension to apply for a length of .200 min.
3. Concentricity to be maintained for a length of .250 min.
4. With the tips closed around an A dia. pin, the tips shall aline themselves within .001 throughout the .544 ±.010 length and clearance between the tips shall be .006 - .010 for a length of .200 ±.010.
5. With the tips in the normal closed position, the tips shall end aline within .005.
6. Allowing for the flexibility of the tips, they shall enter a ring gage of H dia. to a depth of .187 min., with the tips in the ring gage a pin of J dia. shall enter the tips to a depth of .250 min.
7. Surface on exterior of tips to be 16 max.
8. Color band, if used, to be enamel paint or equivalent. Color code indicates tool size.
9. Material - tips: Steel SAE 4130, AMS 6370, or equivalent. Tweezers: Steel, reverse action with box joint to insure note 5. Stainless or treated to resist corrosion.
10. Reference documents shall be the issue in effect on date of invitation for bids. This standard takes precedence over documents referenced herein.
11. © Cadmium plating shall not be used as a coating or finish.

APPROVED 1 Aug 67 REVISED © For changes see pages 1 and 2

P.A. 84 Other Cust EL AS 85		TITLE TOOL, CONTACT, CONNECTOR ASSEMBLY AND DISASSEMBLY	MILITARY STANDARD MS27495
Procurement Specification MIL-C-38999		SUPERSEDES	PAGE 2 OF 3

DD FORM 1 MAY 65 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5120-0861

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5120

User activities: Army - Navy - Air Force -

Review activities: Army - Navy - Air Force - DSA - ES

EC
11, 15, 80

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.000	.00	.025	.64	.064	1.63	.110	2.79
.0000	.00	.0290	.74	.0645	1.64	.135	3.43
.0002	.01	.032	.81	.0675	1.71	.1355	3.44
.001	.03	.0340	.86	.074	1.88	.153	3.89
.0010	.03	.037	.94	.0745	1.89	.1530	3.89
.002	.05	.0455	1.16	.0750	1.91	.155	3.94
.0020	.05	.0480	1.22	.077	1.96	.1550	3.94
.003	.08	.0485	1.23	.0770	1.96	.181	4.60
.004	.10	.050	1.27	.0930	2.36	.187	4.75
.005	.13	.0500	1.27	.096	2.44	.192	4.88
.006	.15	.052	1.32	.0960	2.44	.1925	4.89
.008	.20	.055	1.40	.097	2.46	.200	5.08
.010	.25	.0580	1.47	.0975	2.48	.250	6.35
.011	.28	.060	1.52	.1070	2.72	.38	9.65
.013	.33	.0600	1.52	.109	2.77	.544	13.82
.016	.41	.062	1.57	.1090	2.77	.737	18.72
						4.75	120.65

APPROVED 1 Aug 67 REVISED © For changes see pages 1 and 2

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A	84	International interest	TITLE: TOOL, CONTACT, CONNECTOR ASSEMBLY AND DISASSEMBLY	MILITARY STANDARD
Other Cust	EL AS 85			MS 27495
Procurement Specification: MIL-C-38999		SUPERSEDES:		PAGE 3 OF 3

DD FORM 1 MAY 75 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5120-0861

U.S. GOVERNMENT PRINTING OFFICE: 1976-603-766/2683

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.