
INCH-POUND
MS27724F
29 September 2021
SUPERSEDING
MS27724E
18 April 2011

DETAIL SPECIFICATION SHEET

SWITCH, TOGGLE, FOUR POLE, ENVIRONMENTALLY SEALED, INTEGRATED WIRE TERMINALS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switches described herein shall consist of this specification and the latest issue of MIL-DTL-3950.

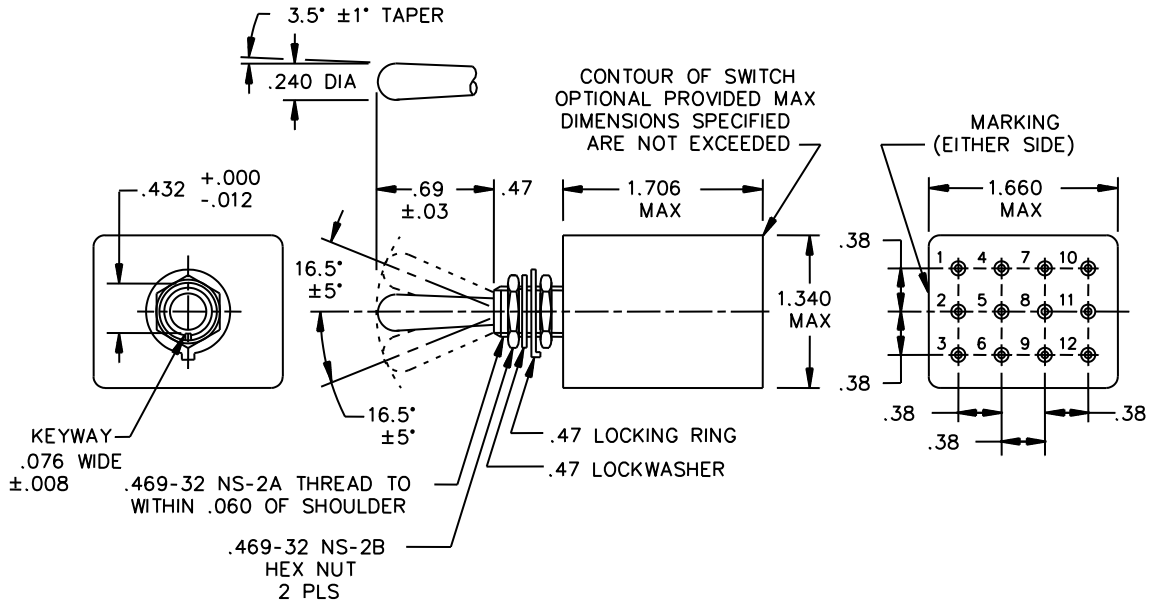

NOTES:

1. Dimensions are inches.
2. Unless otherwise specified, tolerance is ± .020 (0.51 mm) for two place decimals and ± .005 (0.13 mm) for three place decimals.
3. For hardware and terminal screw detail specifications, see appendix of MIL-DTL-3950.
4. Contact installing/removal tool in accordance with MIL-I-81969/14-03 per SAE-AS81969/14.
5. Grommet sealing plug, in accordance with MS27488-16-2 per MS27488.
6. The sealing grommet shall seal on a smooth wire insulation of .068 (1.73 mm) to .103 (2.62 mm) diameters.
7. Terminal shall adequately accept a wire contact within dimensional limits of SAE-AS39029/1-102 per SAE-AS39029/1.
8. In the event of a conflict between the text of this standard and the reference cited herein, the text of this standard shall take precedence.

FIGURE1. Dimensions and configuration

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

The terminal end of switch shall be color coded blue to indicate contact size.

Direction of internal mechanism movement is opposite to the direction of the toggle movement.

Sealing plugs may be used in nonfunctional grommet holes.

Maximum weight is .225 pound.

Electrical rating: See table I.

TEST REQUIREMENTS:

Test shall be performed in accordance with MIL-DTL-3950 except:

a. During all test, switches shall be fully wired with appropriate wire and terminal contacts.
b. Contact voltage drop- the contact voltage drop with two terminals and the switch contact in series shall not exceed 8 millivolts measured from one wire contact through the contacts to the other wire contacts.

TABLE I Detail Requirements.

MS Part number	Circuit with toggle lever in			Current capacity (amperes) 28 volts dc			Current capacity (amperes) 115 volts, 60 and 400 hertz ac		
	Keying side	Center	Opposite keying side	Lamp-load circuit	Resistive circuit	Inductive circuit	Lamp-load circuit	Resistive circuit	Inductive circuit
MS27724-1	1-2 4-5 7-8 ON 10-11	2-3 4-5 7-8 ON 11-12	2-3 5-6 8-9 ON 11-12	5	20	12	4	15	15
MS27724-2	1-2 MOM. 4-5 7-8 ON 10-11	2-3 4-5 7-8 ON 11-12	2-3 5-6 8-9 ON 11-12	4	18	10	2	11	8
MS27724-3	1-2 MOM. 4-5 7-8 ON 10-11	2-3 4-5 7-8 ON 11-12	2-3 MOM. 5-6 8-9 ON 11-12						
MS27724-21	1-2 7-8 4-5 ON 10-11	OFF	2-3 8-9 5-6 ON 11-12	5	20	12	4	15	15
MS27724-22	OFF	NONE	2-3 8-9 5-6 ON 11-12						
MS27724-23	1-2 7-8 4-5 ON 10-11	NONE	2-3 8-9 5-6 ON 11-12						
MS27724-24	NONE	OFF	2-3 8-9 5-6 ON 11-12						
MS27724-25	NONE	MOM. OFF	2-3 8-9 5-6 ON 11-12	4	18	10	2	11	8
MS27724-26	1-2 MOM 7-8 4-5 ON 10-11	NONE	2-3 8-9 5-6 ON 11-12						
MS27724-27	1-2 MOM 7-8 4-5 ON 10-11	OFF	2-3 MOM. 8-9 5-6 ON 11-12						
MS27724-28	1-2 MOM 7-8 4-5 ON 10-11	OFF	NONE						
MS27724-29	MOM. OFF	NONE	2-3 8-9 5-6 ON 11-12						
MS27724-30	1-2 MOM 7-8 4-5 ON 10-11	NONE	OFF						
MS27724-31	1-2 MOM 7-8 4-5 ON 10-11	OFF	2-3 8-9 5-6 ON 11-12						
MS27724-32	NONE	1-2 7-8 4-5 ON 10-11	2-3 MOM. 8-9 5-6 ON 11-12						
MS27724-33	NONE	1-2 7-8 4-5 ON 10-11	2-3 8-9 5-6 ON 11-12	5	20	12	4	15	15

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:49Z
Check the source to verify that this is the current version before use.

Referenced documents
MIL-DTL-3950 MS27488 SAE-AS39029/1 SAE-AS81969/14

The margins of this specification are marked with vertical lines to indicate where modifications from this revision were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army – CR
Navy – AS
Air Force – 85
DLA – CC

Preparing activity
DLA – CC

(Project 5930-2021-036)

Review activities
Army – AR, AV, MI
Navy – EC, MC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:49Z
Check the source to verify that this is the current version before use.