
This military standard is approved for use within the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

User activities:

Review activities: AF-99

FED. SUP CLASS
5945

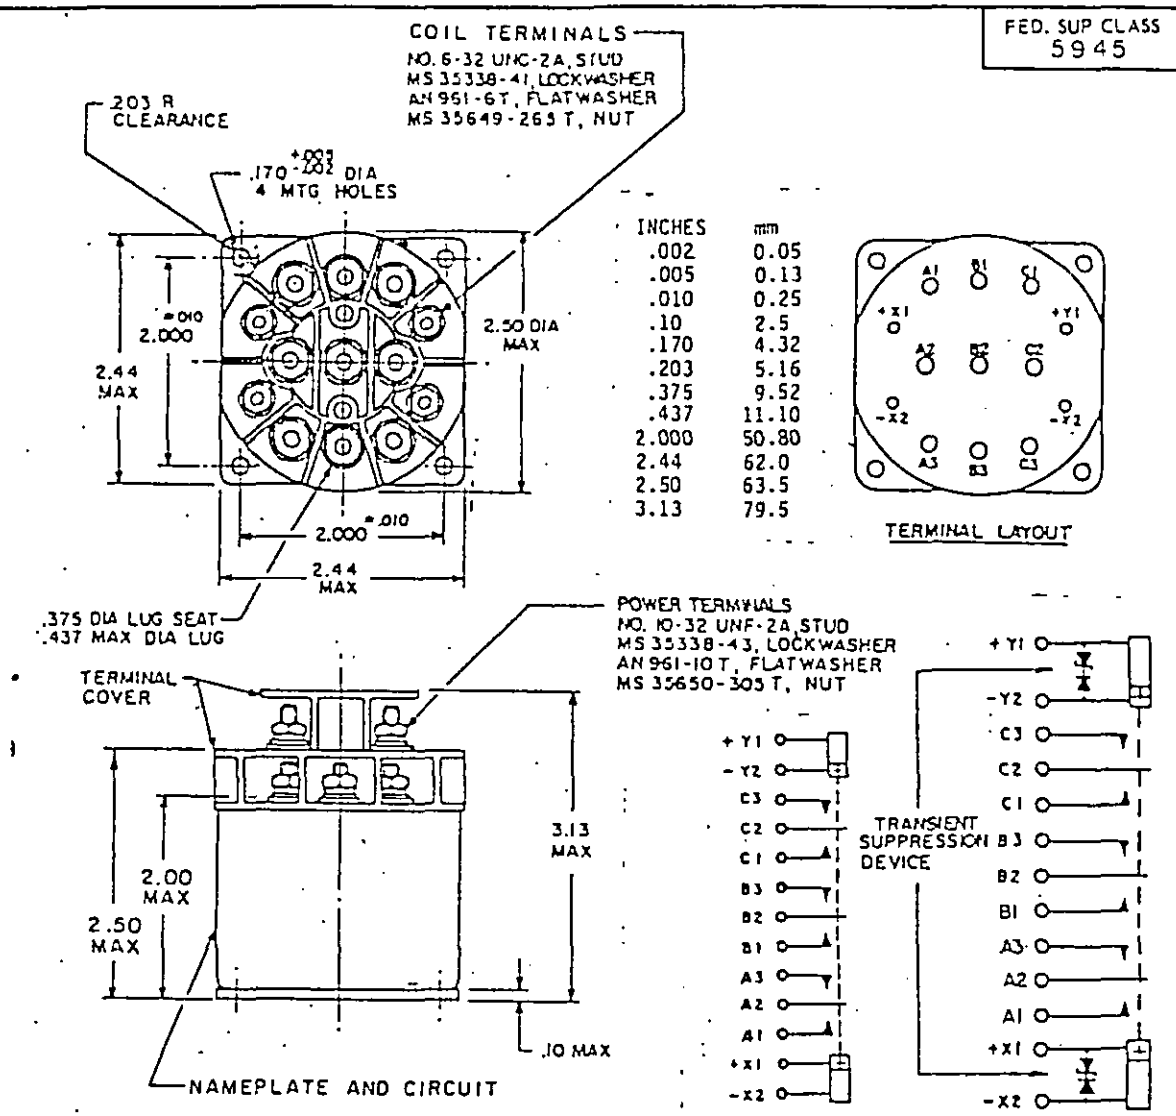

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.031 (0.79 mm).
3. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
4. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein.
5. Weight includes terminal barriers.
6. Suppression level - the maximum induced transient voltage (back EMF) shall be 42 volts.
7. Metric equivalents are given for general information only.

MS PART NUMBER	TYPE	COIL	TERMINAL TYPE	MOUNTING	MAX WEIGHT IN POUNDS	
MS 27750-1	I	DC	STUD	PLATE	.969	(F)
MS 27750-2	I	DC	STUD	PLATE	.969	

(F) denotes changes

APPROVED 17 JAN 72 REVISED (E) 29 APR 1985 (F) 4 MAR 86

P.A AF-85	International interest	TITLE	MILITARY STANDARD
Other Cust		RELAYS, ELECTROMAGNETIC, 50 AMPERES, 3 PDT-NO., CENTER OFF, HERMETICALLY SEALED	MS 27750 (85)
Procurement Specification MIL-R-6106		SUPERSEDES:	PAGE 1 OF 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:50Z
Check the source to verify that this is the current version before use.

This military standard is approved for use within the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

Review activities: AF-99

User activities:

DD FORM 1 MAY 73 672 (Limited coordination: check the source to verify that this is the current version before use.)

Procurement Specification MIL-R-6106

P.A AF-85

Other Cust

International Interest

SUPERSEDES:

TITLE RELAYS, ELECTROMAGNETIC, 50 AMPERES, 3 PDT-NO, CENTER OFF, HERMETICALLY SEALED

MILITARY STANDARD

MS27750 (85)

PAGE 2 OF 3

FED. SUP CLASS 5945

OPERATING CHARACTERISTICS (F)

MS PART NO.	COIL	COIL DATA: Nominal Volts	Nominal Freq Hz	Nominal Res Ω MIN	Max Volts	Max Amp @ 25°C	Max Pick-up Voltage: Nominal 1/	High Temp Test	Cont Current Test	Drop Out voltage 1/	Hold 1/ voltage	TIME-MILLISECONDS-MAX: Operate 2/	Release 3/	Bounce: Main NO	Main NC	Aux NO	Aux NC
MS27750-1	X1,X2	28	DC	150	29	.190	18	20	21	1.5	7.0	35	25	3			
-2	X1,X2	28	DC	150	29	.190	18	20	21	1.5	7.0	35	25	3			

RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED

TYPE OF LOAD	LIFE OPERATING CYCLES x 10^3	28 V dc: Main NO	Main NC	Aux NO	Aux NC	115 V ac, 1 PHASE: Main 400 Hz	Main 60 Hz	Aux 400 Hz	Aux 60 Hz	115/200 V ac, 3 PHASE 4/: Main 400 Hz	Main 60 Hz	Aux 400 Hz	Aux 60 Hz	See Appropriate Notes
Resistive	50	25				50				50				
Inductive	20	15												
Inductive	50					50				50				
Motor	50	15				30				30				
Lamp	50	10				15				15				
Transfer, Load	10					12.5				12.5				5/
Mechanical Life Reduced Current	200	7				14				14				
Min Current	50	1				5				5				

1/ Over temperature range.
2/ With nominal coil voltage.
3/ From nominal coil voltage.
4/ Absence of value indicates relay is not rated for 3 phase applications.
5/ Transfer load indicates relay suitable for transfer between unsynchronized ac power supplies at rating indicated.

APPROVED 17 JAN 72 REVISED (F) FOR CHANGES SEE PAGES 1 & 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:50Z

FED. SUP CLASS
5945

ENVIRONMENTAL CHARACTERISTICS

Temperature range	-55°C to +71°C
Max altitude rating	50,000 ft
Shock G-level	50 G
Duration	6 ms
Max duration contact opening	10 µs
Vibration sinusoidal	
G-level	10 G
Frequency range	70-2,000 Hz
Acceleration:	15 G

ELECTRICAL CHARACTERISTICS

Insulation resistance, initial - - - 100 megohms
After life or environmental tests- - 50 megohms
Dielectric strength (sea level)

	Initial	After life tests
Coil to case	1000 V rms	1000 V rms
Aux contacts		
All other points	1000 V rms	1150 V rms
Dielectric strength (altitude)		
	50,000 Ft	
Coil to case	500 V rms	
Aux contacts		
All other points	700 V rms	
Max contact drop initial		150 volts
After life test		175 volts
Overload current	100 A dc; 115/200 V ac; 400 Hz 400 A	
Rupture current	125 A dc; 115/200 V ac; 400 Hz 400 A	
Duty rating	Continuous	

APPROVED 17 JAN 72 REVISED (F) FOR CHANGES SEE PAGES 1 & 2

User activities:

Review activities: AF-99

This military standard is approved for use within the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

P.A AF-85 Other Cust	International interest	TITLE RELAYS, ELECTROMAGNETIC, 50 AMPERES, 3 PDT-NO., CENTER OFF, HERMETICALLY SEALED	MILITARY STANDARD MS27750 (85)
Procurement Specification MIL-R-6106		SUPERSEDES:	PAGE 3 OF 3

DD FORM 1 MAY 73 672 (Limited coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:50Z
Check the source to verify that this is the current version before use.