This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - MI
Navy - EC
Air Force - 17, 85, 99
DLA - ES

User activities: Army - AR
Navy - MC, CG, OS
Air Force - 14, 19

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

P.A. NAVY-AS
Other Cust AF-11
ARMY - EL

Procurement Specification

International interest

SUPERSEDES:

TITLE


CONTACT BUSHING, ELECTRIC, WIRE BARREL

MILITARY STANDARD

MS3348

PAGE 1 OF 2

5935-3037

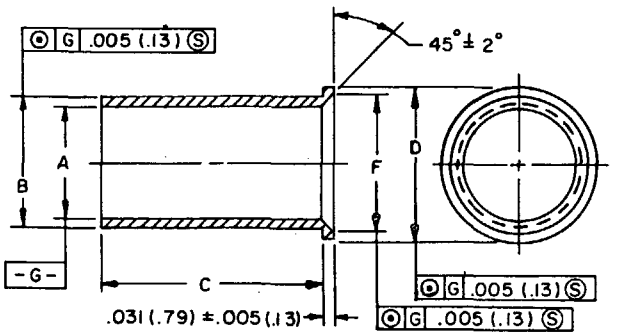

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Dimensioning and tolerancing are in accordance with ANSIY14.5-1973.
4. Metric equivalents are in parentheses.
5. Material: Copper alloy; anneal to Rockwell hardness 15T 70 maximum in accordance with ASTME18, except that -1-6L shall be annealed to Rockwell hardness 15T 55 maximum in accordance with ASTME 18.
6. Finish: Bushings shall be silver plated to a minimum thickness of .0002 inch (.005) in accordance with QQ-S-365. A suitable underplating is permissible.
7. Surface texture: All external surfaces to be 63 or better in accordance with USAS B46.1-1962.
8. Contact bushings to be free of all burrs. Break all sharp edges .005R maximum.
9. Contact bushings -8 -10, -4 -6, and -0 -2 are for use with wire barrels conforming to MS3190, types B and C. Contact bushing -( ) -( )L is for use with contacts MS90559 and MS90560 of MIL-C-39029/48 and /49.

Example of Part No.: MS3348 -8 -10

MS number	Contact wire barrel size	Wire size

10. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
11. Referenced documents shall be of the issue in effect on date of invitations for bid.
12. See page 2 for an alternate design.


(E) denotes changes

Dash number	Contact wire barrel size (ref)	Wire size (ref)	A +.002 (.05) -.003 (.08) Dia	B +.002 (.05) -.003 (.08) Dia	C +.017 (.43) -.016 (.41)	D ±.016 (.41)	F +.006 (.15) -.005 (.13) Dia
-8 -10	8	10	.136 (3.45)	.173 (4.39)	.380 (9.65)	.250 (6.35)	.188 (4.78)
-4 -6	4	6	.225 (5.72)	.272 (6.91)	.380 (9.65)	.344 (8.74)	.292 (7.42)
-0 -2	1/0	2	.359 (9.12)	.444 (11.28)	.536 (13.61)	.516 (13.11)	.462 (11.73)
-4 -6L	4	6	.225 (5.72)	.272 (6.91)	.700 (17.78)	.344 (8.74)	.292 (7.42)
-1 -2L	1	2	.359 (9.12)	.396 (10.06)		.516 (13.11)	.422 (10.72)
-4 -5L	4	5	.250 (6.35)	.272 (6.91)		.344 (8.74)	.292 (7.42)
-6 -8L	6	8	.185 (4.70)	.225 (5.72)		.297 (7.54)	.250 (6.35)
-6 -9L	6	9	.155 (3.94)	.225 (5.72)		.297 (7.54)	.219 (5.56)
-1 -6L	1	6	.225 (5.72)	.396 (10.06)		.516 (13.11)	.422 (10.72)
(E) -4/0 -2/0L	4/0	2/0	.500 (12.70)	.629 (15.98)		.719 (18.26)	.562 (14.27)
(E) -4 -8L	4	8	.185 (4.70)	.272 (6.91)		.344 (8.74)	.250 (6.35)
(E) -6-10L	6	10	.136 (3.45)	.225 (5.72)		.297 (7.54)	.188 (4.78)

FED. SUP CLASS 5935

APPROVED 1 JULY 1969 REVISED (E) 30 JUNE 1978

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:02Z
Check the source to verify that this is the current version before use.

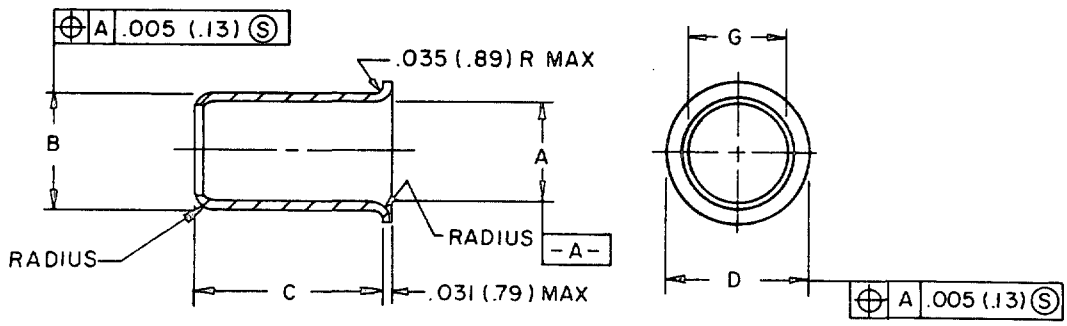

Dash number	Contact Wire Barrel Size (Ref)	Wire Size (Ref)	A Dia Max	B +.002 (.05) -.003 (.08) Dia	C +.010 (.25) Dia	D +.016 (.41) Dia	G Dia Min
-8 -10	8	10	.146 (3.71)	.173 (4.39)	.380 (9.65)	.250 (6.35)	.136 (3.45)
-4 -6	4	6	.235 (5.79)	.272 (6.91)	.380 (9.65)	.344 (8.74)	.225 (5.71)
-0 -2	1/0	2	.369 (9.37)	.444 (11.28)	.536 (13.61)	.516 (13.11)	.359 (9.12)
(E) -1 -2L	1	2	.369 (9.37)	.396 (10.06)	.700 (17.78)	.516 (13.11)	.359 (9.12)
-4 -5L	4	5	.260 (6.60)	.272 (6.91)		.344 (8.74)	.250 (6.30)
-4 -6L	4	6	.235 (5.97)	.272 (6.91)		.344 (8.74)	.225 (6.35)
-6 -8L	6	8	.195 (4.95)	.225 (5.71)		.297 (7.54)	.185 (4.70)
-6 -9L	6	9	.165 (4.19)	.225 (5.71)		.297 (7.54)	.155 (3.94
-1 -6L	1	6	.235 (5.97)	.396 (10.06)		.516 (13.11)	.225 (6.35)
(E) -4/0 -2/0L	4/0	2/0	.510 (12.95)	.629 (15.98)		.719 (18.26)	.500 (12.70)
(E) -4 -8L	4	8	.195 (4.95)	.272 (6.91)		.344 (8.74)	.185 (4.70)
(E) -6-10L	6	10	.146 (3.71)	.225 (5.72)		.297 (7.54)	.136 (3.45)

APPROVED 1 JULY 1969 REVISED (E) FOR CHANGES SEE PAGES 1 & 2

User activities: Army - AR
Navy - MC, CG, OS
Air Force - 14, 19

Review activities: Army - MI
Navy - EC
Air Force - 17, 85, 99
DLA - ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A NAVY-AS Other Cust AF-11 ARMY-EL	International interest	TITLE CONTACT BUSHING,ELECTRIC, WIRE BARREL	MILITARY STANDARD MS 3348
Procurement Specification		SUPERSEDES:	PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:02Z
Check the source to verify that this is the correct version before use.
☆ U.S. GOVERNMENT PRINTING OFFICE: 1973-503-202/207