
FED SUP CLASS
4730

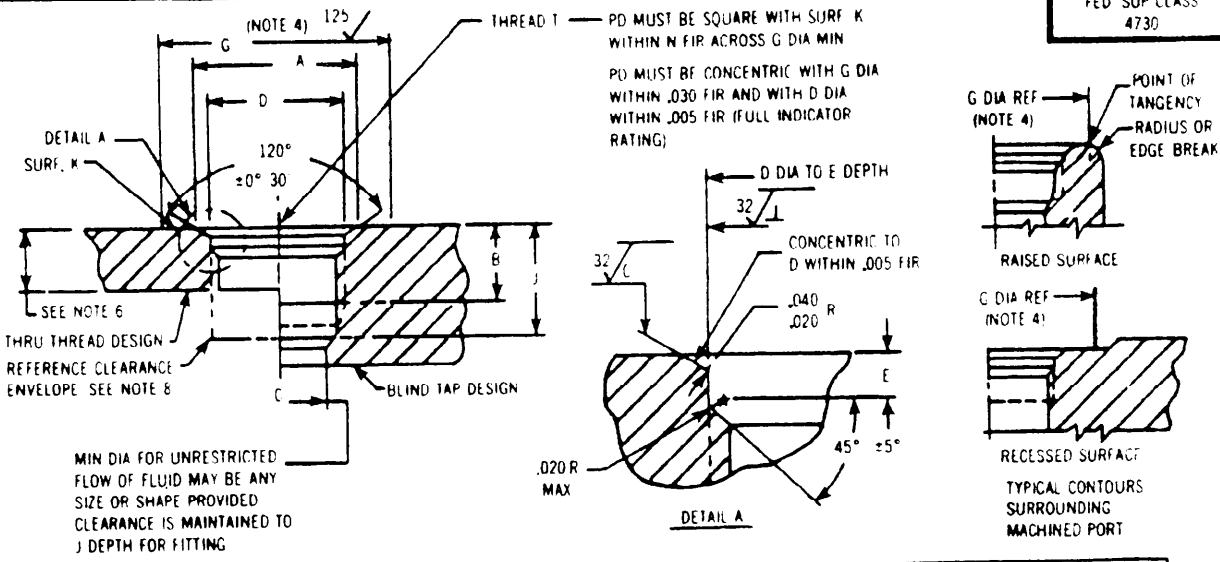

A DASH NUMBER	TUBE OD MIN	THREAD T PER MIL-S-8879	A DIA +.015 -.000	B MIN SEE NOTE 7	C DIA	D DIA +.005 -.000	E +.015 -.000	G DIA MIN	J MIN 4	N
01	-	.2500-28 UNJF 3B	.359	.330	.062	.264	.063	.478	.402	.002
02	.125	.3125-24 UNJF 3B	.438	.482		.328		.602	.577	.003
03	.188	.3750-24 UNJF 3B	.500	.538	.125	.390		.665	.583	
04	.250	.4375-20 UNJF 3B	.562	.568	.172	.454	.075	.728	.656	
05	.312	.5000-20 UNJF 3B	.625		.234	.517		.790		
06	.375	.5625-18 UNJF 3B	.688	.598	.297	.580	.083	.852	.709	.004
07	.438	.6250-18 UNJF 3B	.750	.614	.360	.643	.094	.915	.725	.005
08	.500	.7500-16 UNJF 3B	.875	.714	.391	.769		1.040	.834	
09	.562	.8125-16 UNJ 3B	.938	.730	.438	.832	.107	1.102	.850	
10	.625	.8750-14 UNJF 3B	1.000	.802	.484	.896		1.165	.930	
11	.688	1.0000-12 UNJF 3B	1.156	.877	.547	1.023	.125	1.352	1.064	
12	.750	1.0625-12 UNJ 3B	1.234		.609	1.086		1.415		
14	.875	1.1875-12 UNJ 3B	1.362		.734	1.211		1.540		
16	1.000	1.3125-12 UNJ 3B	1.487		.844	1.336		1.665		.008
18	1.125	1.5000-12 UNJF 3B	1.675		.953	1.524		1.790	1.116	
20	1.250	1.6250-12 UNJ 3B	1.800		1.078	1.648		1.978		
24	1.500	1.8750-12 UNJ 3B	2.050		1.312	1.898		2.228	1.127	.010
28	1.750	2.2500-12 UNJ 3B	2.425		1.547	2.273		2.602	1.243	
32	2.000	2.5000-12 UNJ 3B	2.675	.907	1.781	2.524		2.852	1.368	

1. DIMENSIONS IN INCHES
2. SURFACE TEXTURE ANSI B46.1 1978
3. REMOVE ALL BURRS AND SLIVERS AND BREAK SHARP EDGES
4. MINIMUM DIAMETER FLAT SURFACE CLEARANCE PROVISIONS FOR FITTING WRENCH FITTING INSTALLATION AND TOOL FILLET RADII MUST BE ADDED AS REQUIRED G MIN DIAMETER MAY BE REDUCED BY .040 WHEN IT DEFINES THE LIMITS OF A RAISED SURFACE AND WHEN STRENGTH REQUIREMENTS PERMIT
5. CERTAIN PROVISIONS OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ASCC AIR STD 17/18 WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIANS WILL INFORM THEIR RESPECTIVE STANDARDIZATION OFFICE SO THAT APPROPRIATE ACTION MAY BE TAKEN RESPECTING THE INTERNATIONAL AGREEMENT CONCERNED
6. THRU THREAD DESIGN SHALL HAVE SUFFICIENT THREADS TO MEET STRENGTH REQUIREMENTS OF MATERIAL USED
7. B MIN IS THE FULL THREAD DEPTH REQUIREMENT FOR BLIND TAP DESIGN
8. REFERENCE CLEARANCE ENVELOPE PROVIDES MINIMUM CLEARANCE FOR THE LONGEST STANDARD FITTING

~~THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES~~
BY THE SAE AEROSPACE PROPULSION DIVISION AND PART STANDARDS DIVISION

THIS IS A DESIGN STANDARD NOT TO BE USED AS A PART NUMBER

APPROVED 1DEC 1966 REVISED (A) 2 AUG 73 (B) 12 Mar 84 (C) 2 Aug 84

User activities
Navy CG ME

Review activities
Army AT ME
Air Force 82
DLA CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design application and for repetitive use shall be made from this document

PA Air Force 11 Other Cust Army AV Navy AS	INTERNATIONAL INTEREST	TITLE BOSSES, FLUID CONNECTION INTERNAL STRAIGHT THREAD	MILITARY STANDARD MS 33649
PROCUREMENT SPECIFICATION NONE	SUPERSEDES AND 10049 AND 10050		SHEET 1 OF 3

Source: https://assist.dla.mil -- Downloaded: 20240-23117.00Z
Check the source to verify that this is the current version before use.

PROJECT NO 4730-0672