
FED. SUP CLASS
6630

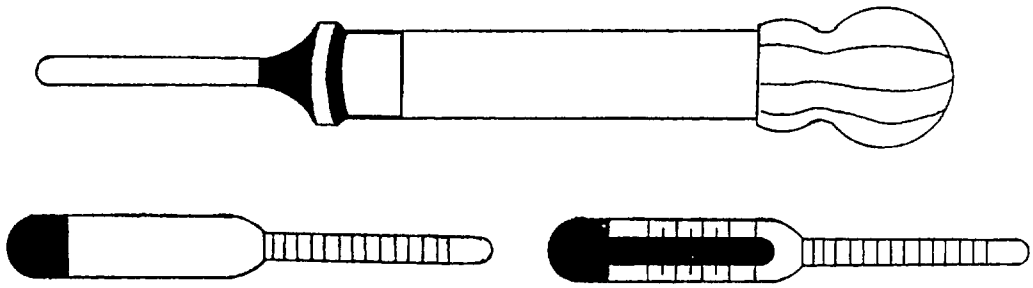

DASH NUMBER	-1	-2	-3	-4	-5	-6	-7
SPECIFIC GRAVITY RANGE	1.130-1.310	1.100-1.350	1.130-1.310	1.200-1.400	1.060-1.240 / 1.200-1.280	1.100-1.300	1.100-1.250 / 1.210-1.300
LENGTH OF HYDROMETERS (IN.)	4.25-6	4.25-6	4.5-6	4.5-6	6.75 max	4.5 max	3.5-4.5
NOMINAL LENGTH OF INLET TUBE (IN.)	2.25	2.25	2.25	2.25	6.9375	4.4375	4
LENGTH OF BARRELS (IN.)	5.25-7	5.25-7	5.5-7	5.5-7	10.4375-10.5625	6.9375-7.0625	8.25-8.6875
NUMBER OF BARRELS	1	1	1	1	2	2	1
NUMBER OF HYDROMETERS	1	1	1	1	4	2	2
NUMBER OF THERMOMETERS	1	1	0	0	2	2	1
Ⓐ THERMOMETER RANGE (°F)	20 to 120	-65 to 165	----	----	0 to 180	20 to 150	0 to 120
SUPPLIED WITH CORRECTION CHART	Yes	Yes	No	No	Yes	No	Yes
HYDROMETER ACCURACY RATING (SP GR)	0.005	0.005	0.005	0.005	0.0025	0.005	0.0025

MATERIAL: Ⓐ Hydrometers and barrels shall be of borosilicate glass in accordance with ASTM E 438, Type I, Class A.

Storage case shall be of wood or fiberboard treated to resist acid and moisture.

Bulbs and plugs shall be of soft acid-resisting rubber with a tensile strength of 2,000 pounds per square inch. They shall be vulcanized and contain a minimum of 25% crude rubber.

Hydrometer scale shall be printed on white ledger paper with permanent black marking material, such as India ink.

Ballast shall be of lead shot, mercury, or fused metal alloy.

DESIGN: Tester shall consist of a bulb, a barrel, a tip, a plug, and a hydrometer.

Bulb shall be capable of drawing solution into the barrel and retaining it when the bulb is released. It shall be removable so the hydrometers can be interchanged.

APPROVED 7 OCT 1968 REVISED Ⓐ 18 JUN 1986

USER ACTIVITIES: ARMY - AV, AR, ER, ME
NAVY - CG, MC, OS

REVIEWER ACTIVITIES: NAVY - YD

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited. This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. EA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust MS 99		TESTER, BATTERY ELECTROLYTE SOLUTION	MS36546
Procurement Specifications: See Notes 1 & 2	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NUMBER 6630-0438-4
REVISION

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:43Z
Check the source to verify that this is the current version before use.

Barrel shall be cylindrical with straight sides.

Tip shall be fastened to the lower end of the barrel for inserting into the solution.

Plug shall be placed in the upper end of the barrel to prevent the hydrometer from entering the bulb.

Hydrometers shall be of the constant-mass, variable displacement type and shall have a stem and body.

Thermometer, scales, and correction charts shall be securely fastened in the stem of the hydrometer.

Ballast shall be securely contained in the lower portion of the hydrometer body.

Hydrometers shall be calibrated at 80°F.

Duplicate hydrometers and barrels for MS36546-5 and MS36546-6 are for replacement in case of breakage.

PURPOSE: To be used in measuring the specific gravities of electrolyte solutions of the following:

MS36546-1 thru MS36546-4 Automotive lead-acid storage batteries.

MS36546-5 Submarine lead-acid storage batteries.

MS36546-6 Portable and Radio lead-acid storage batteries.

MS36546-7 Aircraft lead-acid storage batteries.

NOTES:
1. The procurement document for MS36546-1, MS36546-2, MS36546-3, and MS36546-4 testers is Federal Specification GG-T-258.
2. The procurement document for MS36546-5, MS36546-6, and MS36546-7 testers is Military Specification MIL-H-16384.
3. Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements as specified herein.
4. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
5. Referenced documents shall be of the issue in effect on date of invitations for bid.

USER ACTIVITIES:

REVIEWER ACTIVITIES:

REVISED

APPROVED

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. EA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust MS 99		TESTER, BATTERY ELECTROLYTE SOLUTION	MS36546
Procurement Specifications See Notes 1 & 2	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NUMBER 6630-0438-4 REVISION

☆U.S. GOVERNMENT PRINTING OFFICE: 1986-605-036/43857

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:43Z
Check the source to verify that this is the current version before use.