

E-19-21

FED. SUP CLASS
4730

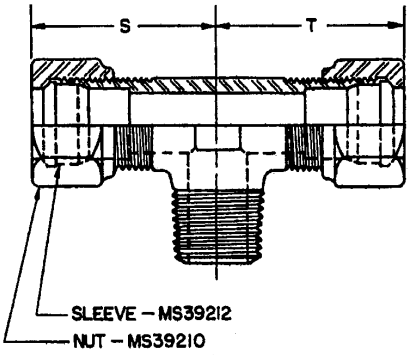

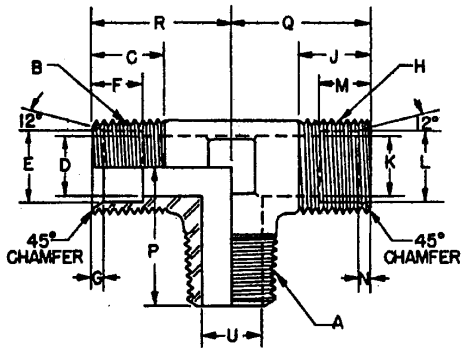

DETAIL OF BODY

DASH NO.	TUBE O.D.		A PIPE THREAD NPTF	B	C THREAD LENGTH	D	E	F	G
1	1/8	1/8	1/8	5/16-24UNF-2A	9/32	3/32	.135 .139	13/64	1/8
2	3/16	3/16	1/8	3/8-24UNF-2A	9/32	1/8	.196 .200	1/4	5/32
3	1/4	1/4	1/8	1/2-20UNF-2A	13/32	13/64	.261 .265	19/64	13/64
4	5/16	5/16	1/8	9/16-18UNF-2A	13/32	13/64	.324 .328	19/64	13/64
5	1/4	1/4	1/4	1/2-20UNF-2A	13/32	13/64	.261 .265	19/64	13/64
6	3/8	1/4	1/4	5/8-18UNF-2A	7/16	9/32	.386 .390	19/64	13/64
7	3/8	3/8	1/4	5/8-18UNF-2A	7/16	9/32	.386 .390	19/64	13/64
8	1/2	1/2	3/8	3/4-16UNF-2A	7/16	27/64	.514 .518	5/16	13/64
9	3/8	3/8	1/2	5/8-18UNF-2A	7/16	9/32	.386 .390	19/64	13/64

DASH NO.	H	J	K	L	M	N	P	Q	R	S	T	U
1	5/16-24UNF-2A	9/32	3/32	.135 .139	13/64	1/8	3/4	21/32	21/32	31/32	31/32	3/32
2	3/8-24UNF-2A	9/32	1/8	.196 .200	1/4	5/32	3/4	21/32	21/32	1	1	1/8
3	1/2-20UNF-2A	13/32	13/64	.261 .265	19/64	13/64	25/32	3/4	3/4	1-5/32	1-5/32	13/64
4	9/16-18UNF-2A	13/32	13/64	.324 .328	19/64	13/64	25/32	13/16	13/16	1-3/16	1-3/16	13/64
5	1/2-20UNF-2A	13/32	13/64	.261 .265	19/64	13/64	1-1/16	7/8	7/8	1-9/32	1-9/32	13/64
6	1/2-20UNF-2A	13/32	13/64	.261 .265	19/64	13/64	1-1/16	15/16	7/8	1-3/8	1-5/16	13/64
7	5/8-18UNF-2A	7/16	9/32	.386 .390	19/64	13/64	1-1/16	15/16	15/16	1-3/8	1-3/8	9/32
8	3/4-16UNF-2A	7/16	27/64	.514 .518	5/16	13/64	1-3/16	1-1/8	1-1/8	1-21/32	1-21/32	27/64
9	5/8-18UNF-2A	7/16	9/32	.386 .390	19/64	13/64	1-3/8	1-1/8	1-1/8	1-3/8	1-3/8	9/32

Ⓕ **INACTIVE** FOR NEW DESIGN, USE FOR MAINTENANCE PURPOSES ONLY. FOR NEW DESIGN USE MS51818.

APPROVED 24 APR 62 — REVISED Ⓐ 19 JUL 63 Ⓑ 29 DEC 67 Ⓒ 10 OCT 74 Ⓓ 3 FEB 75 Ⓔ 13 MAY 77 Ⓕ 26 FEB 82

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

P.A. ARMY-AT Other Cust	TITLE TEES, PIPE TO TUBE - SAFETY SLEEVE COMPRESSION TYPE, MALE PIPE SIDE	MILITARY STANDARD MS39205(AT)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 2

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 4730-A218

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:48Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

DASH NO.	TUBE O.D.		A PIPE THREAD NPTF	B	C THRD LENGTH	D	E	F	G
10	1/2	1/2	1/2	3/4 -16UNF-2A	7/16	27/64	.514 .518	5/16	13/64
11	5/8	5/8	1/2	15/16-16UN-2A	15/32	1/2	.641 .645	11/32	15/64
12	7/8	7/8	1/2	1 3/16-16UN-2A	15/32	23/32	.891 .895	11/32	13/64
13	3/4	3/4	3/4	1 1/16-16UN-2A	15/32	21/32	.766 .770	11/32	13/64
14	7/8	7/8	3/4	1 3/16-16UN-2A	15/32	23/32	.891 .895	11/32	13/64
15	1	1	3/4	1 5/16-16UN-2A	15/32	7/8	1.016 1.020	13/32	13/64
16	1	1	1	1 5/16-16UN-2A	15/32	7/8	1.016 1.020	13/32	13/64
17	1	1 1/4	1 1/4	1 5/16-16UN-2A	15/32	7/8	1.016 1.020	13/32	13/64
18	1 1/4	1 1/4	1 1/4	1 5/8 -16UN-2A	35/64	1 3/32	1.270 1.274	13/32	13/64
19	1 1/2	1 1/2	1 1/2	1 7/8 -16UN-2A	9/16	1 11/32	1.520 1.524	15/32	13/64

DASH NO.	H	J	K	L	M	N	P	Q	R	S	T	U
10	3/4 -16UNF-2A	7/16	27/64	.514 .518	5/16	13/64	1 3/8	1 1/4	1 1/4	1 25/32	1 25/32	27/64
11	15/16-16UN-2A	15/32	1/2	.641 .645	11/32	15/64	1 7/16	1 5/16	1 5/16	1 27/32	1 27/32	1/2
12	1 3/16-16UN-2A	15/32	23/32	.891 .895	11/32	13/64	1 5/8	1 3/4	1 3/4	2 11/32	2 11/32	23/32
13	1 1/16-16UN-2A	15/32	21/32	.766 .770	11/32	13/64	1 9/16	1 1/2	1 1/2	2 3/32	2 3/32	21/32
14	1 3/16-16UN-2A	15/32	23/32	.891 .895	11/32	13/64	1 3/4	1 3/4	1 3/4	2 11/32	2 11/32	23/32
15	1 5/16-16UN-2A	15/32	7/8	1.016 1.020	13/32	13/64	1 15/16	1 3/4	1 3/4	2 11/32	2 11/32	7/8
16	1 5/16-16UN-2A	15/32	7/8	1.016 1.020	13/32	13/64	1 15/16	1 3/4	1 3/4	2 11/32	2 11/32	7/8
17	1 5/8 -16UN-2A	35/64	1 3/32	1.270 1.274	13/32	13/64	2 5/16	1 3/4	2 1/4	2 11/32	2 7/8	1 3/32
18	1 5/8 -16UN-2A	35/64	1 3/32	1.270 1.274	13/32	13/64	2 5/16	2 1/4	2 1/4	2 7/8	2 7/8	1 3/32
19	1 7/8 -16UN-2A	9/16	1 11/32	1.520 1.524	15/32	13/64	2 9/16	2 3/8	2 3/8	3 1/16	3 1/16	1 11/32

MATERIAL: Steel, in accordance with Federal Standard No. 66, AISI-C-1112, C-1113, C-1117, C-1118 or C-1137.

FINISH: Cadmium plated, Specification QQ-P-416, Type II, Class 3.

TOLERANCE: Unless otherwise specified, decimals ± .005, fractions ± 1/64, degrees ± 2°.

THREADS: The threads shall be in accordance with MIL-STD-H28/2/8.

DIMENSIONS: Unless otherwise specified, dimensions are in inches.

PART NUMBER: The part number consists of MS number plus the dash number, example: MS39205-1. The part number covers the complete item (with nuts and sleeves).

NOTES: 1. Referenced documents shall be of the issue in effect on date of invitations for bid.

2. This illustration is for identification and is not intended to restrict designs or shapes not dimensioned.

INACTIVE—SEE SHEET 1.

APPROVED 24 APRIL 62 REVISED

P.A. Other Cust	TITLE TEES, PIPE TO TUBE—SAFETY SLEEVE, COMPRESSION TYPE, MALE PIPE SIDE	MILITARY STANDARD MS39205(AT)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:48Z
Check the source to verify that this is the current version before use.