


FED. SUP CLASS
2330

# (B) INACTIVE FOR NEW DESIGN AFTER 10 FEBRUARY 1989 NO SUPERSEDING STANDARD.

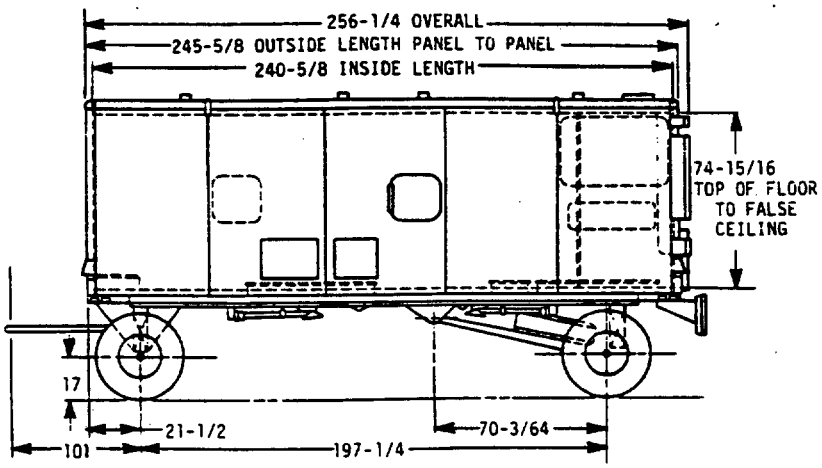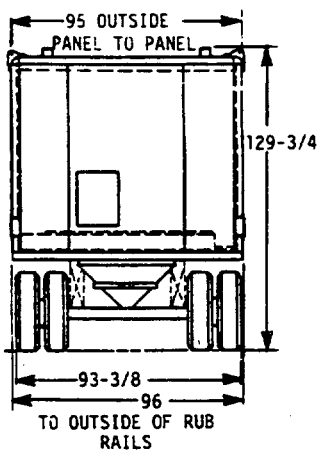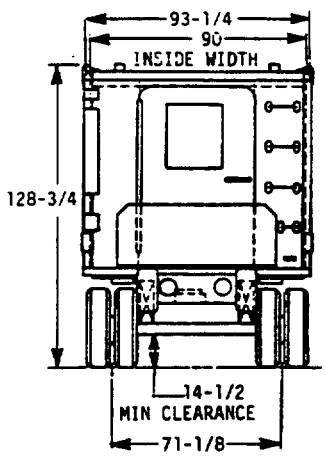


USER ACTIVITIES:
REVIEWER ACTIVITIES:
This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

APPROVED 1 AUGUST 1966 REVISED (A) 22 MAY 85 (B) 10 FEB 1989

| MS PART NO. | ENGINEERING DWG NO |
|---|---|
| MS500063-1 | 8736392 |

| | | | |
|---|---|---|---|
| P. A. ARMY-AT<br>Other Cust NAVY-AS | INTERNATIONAL INTEREST | TITLE<br>TRAILER, GUIDED MISSILE, TRACKING STATION, 4 WHEEL, M428A1 | MILITARY STANDARD<br>MS500063(AT) |
| PROCUREMENT SPECIFICATION<br>MIL-T-45393 | SUPERSEDES: | | SHEET 1 OF 2 |

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:46Z
Check the source to verify that this is the current version before use.

Ⓑ INACTIVE FOR NEW DESIGN AFTER 10 FEBRUARY 1989
NO SUPERSEDING STANDARD.

VEHICLE CHARACTERISTICS

PRIME MOVER: TRUCK, 2-1/2 TON, 6 X 6

WEIGHTS:

| | |
|---|---|
| CURB WEIGHT | 12715 |
| PAYLOAD | 4895 |
| BODY AND PAYLOAD SPRUNG WEIGHT | 9815 |
| NET EMPTY | 7820 |
| FRONT DOLLY | 1400 |
| REAR DOLLY | 1500 LBS |

MAXIMUM WEIGHT: INCLUDING BODY, WITH PAYLOAD EVENLY DISTRIBUTED.

| | |
|---|---|
| FRONT AXLE | 3780 |
| REAR AXLE | 4240 LBS |

(REFERENCED WEIGHTS ARE FOR INFORMATION ONLY.)

GENERAL: THE M428A1 IS A 4 DUAL WHEEL VAN TYPE TRAILER USED IN THE NIKE HERCULES SYSTEM FOR ACCOMODATING MISSLE-TRACKING AND TARGET-TRACKING RADAR EQUIPMENT.
THE BODY IS INSULATED WITH BONDED HONEY-COMB TYPE INSULATION AND PROVIDED WITH HEATING AND VENTILATING DUCTS.
THE TRAILER IS PROVIDED WITH FOUR CORNER TIE-DOWNS, FOUR FRAME TIE-DOWNS, FOUR LIFTING EYES, WHEEL CHOCKS, REAR PLATFORM, REAR BUMPER, AND A GROUND ROD STUD. IT HAS A PIVOTING FRONT DOLLY APPROX. 85° EACH DIRECTION FROM CENTER AND A FIXED REAR DOLLY WHICH ARE DETACHABLE FROM THE TRAILER BED.
THE FRONT DOLLY CONSISTS OF A CONESHAPED FIFTH WHEEL ASSEMBLY AND INCLUDES INDEP-ENDENT WHEEL SUSPENSION, DETACHABLE IN-TERVEHICULAR CABLE, AND SAFETY CHAINS.
THE REAR DOLLY IS AN "A" FRAME TYPE THAT INCLUDES STABILIZER BAR, SWAYBAR, SERVICE AND HAND BRAKE. THE TRAILER INTERIOR IS EQUIPPED WITH FLUORESCENT AND INCANDESCENT LIGHT FIXTURES WHICH SERVE AS OPERATIONAL, EMERGENCY, AND BLACKOUT LIGHTS.

ELECTRICAL SYSTEM:

| | |
|---|---|
| VAN, | INST'N 8003501 |
| CHASSIS, | INST'N 10906588 |
| POTENTIAL, | 24 VOLTS |
| HEATER, | 9005301 |
| 400 CYCLE, 3 PHASE, | 208 VOLTS, AC |
| INTERIOR, | 120 VOLT, AC, 60 CYCLE |
| EXTERIOR AND EMERGENCY LIGHTS | 24 VOLTS, DC |
| CLEARANCE, SERVICE | 2 AMBER, MS35423-1 |
| | 2 RED, MS35423-2 |
| CLEARANCE, BLACKOUT | 2 AMBER, MS35424-1 |
| | 2 RED, MS35424-2 |
| STOPLIGHT, TAIL, | 2 MS51329-1 |
| STOPLIGHT, BLACKOUT, | 1 MS51302-1 |

REFLECTORS:

| | |
|---|---|
| 4, RED, | MS35387-1 |
| 4, AMBER, | MS35387-2 |

TRAILER DOLLIES:

| | |
|---|---|
| FRONT, M573D | 8736414 |
| SPRING, LEFT | 8221331 |
| SPRING, RIGHT | 7615319 |
| REAR, M430 AIR | 8158425 |
| SPRING, RIGHT | 8155307 |
| SPRING, LEFT | 8001855 |

FORDING DEPTH: TOP OF TIRES.

UNDERCARRIAGE: INST'N 10906594

SERVICE BRAKES:

| | |
|---|---|
| DRUM SIZE, 13-1/8 X 2 | |
| ACTUATION, AIR/HYDRAULIC | |
| EMERGENCY RELAY VALVE, | 8016936 |
| AIR RESERVOIR, | 8017035 |
| BRAKE ASSEMBLY: | |
| LEFT FRONT, | 8016969 |
| RIGHT FRONT, | 8016970 |
| LEFT REAR, | 8016971 |
| RIGHT REAR, | 8016972 |
| POWER CLUSTER, | 8017004 |

WHEELS:

| | |
|---|---|
| DUAL, DISC, SIZE, 16 X 6-1/2 | |
| 5-7/8 OFFSET, | MS53044-3 |

TIRES: 9.00-16, 8 PLY,

| | |
|---|---|
| TREAD TYPE, REGULAR, | MS35388-78, |
| TUBES, | MS35392-10 |

MAXIMUM TOWING SPEEDS:

| | |
|---|---|
| HIGHWAY, | 50 MPH |
| CROSS COUNTRY, | 20 MPH |

BUMPER ASSY: 10906582

FRAME ASSY: 10906632

VAN: INST'N 9020103

LIFTING EYES: 2 FRONT, 2 REAR

MISCELLANEOUS EQUIPMENT:

| | |
|---|---|
| FIRE EXTINGUISHER: 2, FREON, PORTABLE, | 10916537 |
| LEVELING JACKS: 2, | 8002383 |
| 2, | 8004581 |
| STAIR ASSEMBLY: PORTABLE, EXTENSIBLE, | 8161317 |

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48397-5000.

| MS PART NO. | ENGINEERING DWG NO |
|---|---|
| MS500063-1 | 8736392 |

| | | | |
|---|---|---|---|
| P. A. ARMY-AT<br>Other Cust NAVY-AS | INTERNATIONAL INTEREST | TITLE<br>TRAILER, GUIDED MISSILE, TRACKING STATION, 4 WHEEL, M428A1 | MILITARY STANDARD<br>MS500063(AT) |
| PROCUREMENT SPECIFICATION<br>MIL-T-45393 | SUPERSEDES: | | SHEET 2 OF 2 |

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:46Z
Check the source to verify that this is the current version before use.

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION
PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
2330-A995

APPROVED 1 AUGUST 1966 REVISED Ⓐ 22 MAY 85 Ⓑ 10 FEB 1989

USER ACTIVITIES:
REVIEWER ACTIVITIES
AMSC N/A

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.