
FED. SUP CLASS
2320

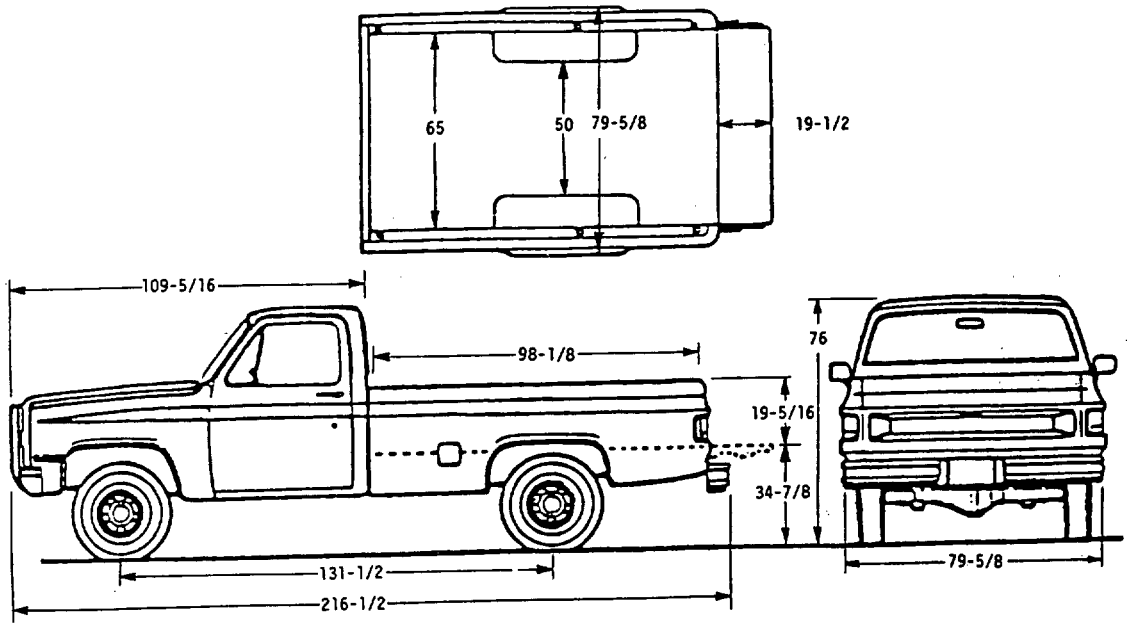

MS PART NO.	MODEL NO.	
MS52204-1	M1008A1	WITH COMMO RACK
MS52204-2	M1008	LESS COMMO RACK

APPROVED 3 JUL 85 REVISED

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of defense.

DISTRIBUTION STATEMENT A. Approved for public release; distrubution is unlimited.

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE TRUCK, CARGO, TACTICAL, 4X4, 1-1/4 TON, M1008/ M1008A1 (COMMERCIAL)	MILITARY STANDARD MS52204(AT)
PROCUREMENT SPECIFICATION ATPD 2074	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:22Z
Check the source to verify that this is the current version before use.

USER ACTIVITIES:
REVIEWER ACTIVITIES:
This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FED. SUP CLASS 2320

VEHICLE CHARACTERISTICS

MODEL: M1008/M1008A1

FRAME: CHANNEL-SECTION DESIGN WITH LADDER-TYPE CONSTRUCTION.

SIDE RAIL DIMENSIONS:

WIDTH	2-25/32 IN
DEPTH	7-3/4 IN
THICKNESS	3/16 IN
SECTION MODULUS	6.14 IN^3
RBM OF FRAME	239,460

WIDTH OVER RAILS

FRONT	28-3/32 IN
REAR	34-1/32 IN
OVERALL LENGTH OF RAIL	204-1/8 IN

CURB WEIGHT:

TRUCK, CARGO, TACTICAL, FULLY EQUIPPED LESS PAYLOAD AND CREW 5,900 LBS

PAYLOAD: 2,900 LBS

GROSS WEIGHT:

FULLY EQUIPPED, LOADED, LESS CREW (ADD 400 LBS FOR TWO MAN CREW PLUS EQUIPMENT) 8,800 LBS

ENGINE:

6.2 LITER DIESEL ENGINE.

TYPE	VALVE-IN-HEAD
PISTON DISPLACEMENT	379 CU IN
BORE AND STROKE	3.98 X 3.82 IN
COMPRESSION RATIO	21.5 TO 1
EXHAUST	DUAL
SAE NET HORSEPOWER	135 AT 3,600 RPM
SAE NET TORQUE LB-FT	240 AT 2,000 RPM

TRANSMISSION:

3 SPEED AUTOMATIC.

GEAR TYPE: PLANETARY

TORQUE CONVERTER	LOCKUP	BREAKAWAY
GEAR RATIOS:		
FIRST	2.48	5.70
SECOND	1.48	3.40
THIRD	1.00	2.30
REVERSE	2.10	4.83

TRANSFER CASE:

PART-TIME FOUR WHEEL DRIVE WITH MANUAL LOCKING HUBS IN THE FRONT AXLE.

LEVER LOCATION: FLOOR, RIGHT OF CENTER

LEVER POSITION: 4-LOW (ALL WHEEL UNDERDRIVE)
N (NEUTRAL)
4-HIGH (ALL WHEEL DIRECT DRIVE
2-HIGH (REAR WHEEL DRIVE)

RATIOS:	
HIGH RANGE:	1.00 TO 1
LOW RANGE:	2.61 TO 1

FRONT AXLE AND SUSPENSION:

THE FRONT AXLE IS A FULL-FLOATING DESIGN AND HAS A RATING OF 4,500 LBS. THE FRONT SUSPENSION IS A TAPERED LEAF (THREE-LEAF) DESIGN RATED AT 2,250 LBS PER SPRING. FRONT SHOCK ABSORBERS ARE HEAVY DUTY. A FRONT STABILIZER BAR IS INCLUDED.

MINIMUM SHAFT DIAMETER	1-5/16 IN
RATIO	4.56 TO 1
PINION MOUNTING	OVERHUNG
PINION BEARINGS	TAPERED ROLLER
DIFFERENTIAL, TYPE	2 PINION
DIFFERENTIAL BEARING, TYPE	TAPERED ROLLER
WHEEL ATTACHMENT	8 BOLT

REAR AXLE AND SUSPENSION:

THE REAR AXLE IS A FULL-FLOATING DESIGN WITH AN AXLE RATING OF 7,500 LBS AND IS EQUIPPED WITH A LOCKING DIFFERENTIAL. THE REAR SUSPENSION IS A 2 STAGE, SEMI-ELLIPTIC LEAF SPRING (9 LEAVES PER SPRING), RATED AT 3,500 LBS PER SPRING. REAR SHOCK ABSORBERS ARE ALSO HEAVY DUTY.

HOUSING DIAMETER AND THICKNESS	3-3/8 X 9/32 IN
RATIO:	4.56 TO 1
DIFFERENTIAL, TYPE	4-PINION
DIFFERENTIAL BEARING, TYPE	TAPERED ROLLER

WHEELS:

FOUR PLUS ONE SPARE; 16 X 6-1/2 IN, ONE PIECE, 8 LUG.

TIRES:

FOUR PLUS ONE SPARE; LT235/85R-16E, ON/OFF ROAD TREAD DESIGN, STEEL BELTED RADIAL BLACKWALLS.

ELECTRICAL SYSTEM:

28 VOLT, 100 AMPERE, 12 VOLT LIGHTING AND CONTROL SYSTEM.

PERFORMANCE AT GVW:

VEHICLE IS ABLE TO ASCEND A GRADE OF

3% AT 55 MI/HR
6% AT 45 MI/HR
30% AT 10 MI/HR

FORDING: 20 IN AT 5 MI/HR

RANGE:

250 MILES WITH PAYLOAD, IN 2 WHEEL DRIVE, AT A CONSTANT SPEED OF 55 MI/HR.

TOWING:

CAPABLE OF TOWING MILITARY SERIES M101 TRAILER (3,000 LBS) LOADED.

ENVIRONMENTAL CAPABILITY:

CAPABLE OF OPERATION IN TEMPERATURES OF

-10^{0}F TO 120^{0}F W/O WINTERIZATION KIT
-50^{0}F TO 120^{0}F WITH WINTERIZATION KIT

MILITARY REQUIREMENTS:

AIR TRANSPORTABILITY; BLACKOUT LIGHT; CAMOUFLAGE PAINT; MILITARY MARKINGS; ENGINE DIAGNOSTIC CONNECTOR ASSEMBLY; CARGO TIEDOWN HOOKS; MULTI-PURPOSE TOWING/TIEDOWN EYES; REAR PINTLE HOOK WITH TRAILER WIRING CONNECTOR; SLAVE START CAPABILITY; WEAPON HOLDERS; NUCLEAR, BIOLOGICAL AND CHEMICAL (NBC) WARFARE PROTECTION, RADIO MOUNTING PROVISIONS.

ADD-ON CAPABILITIES (KITS):

CARGO BOX COVER KIT
WINTERIZATION KIT
TROOP SEAT KIT (INCLUDED)

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MI 48397-5000.

MS PART NO.	MODEL NO.	
MS52204-1	M1008A1	WITH COMMO RACK
MS52204-2	M1008	LESS COMMO RACK

APPROVED 3 JUL 85 REVISED

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE TRUCK, CARGO, TACTICAL, 4X4, 1-1/4 TON, M1008/ M1008A1 (COMMERCIAL)	MILITARY STANDARD MS52204(AT)
PROCUREMENT SPECIFICATION ATPD 2074	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆U.S. GOVERNMENT PRINTING OFFICE: 1985 — 505-038/24003

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:22Z
Check the source to verify that this is the current version before use.