
FED SUP CLASS
5930

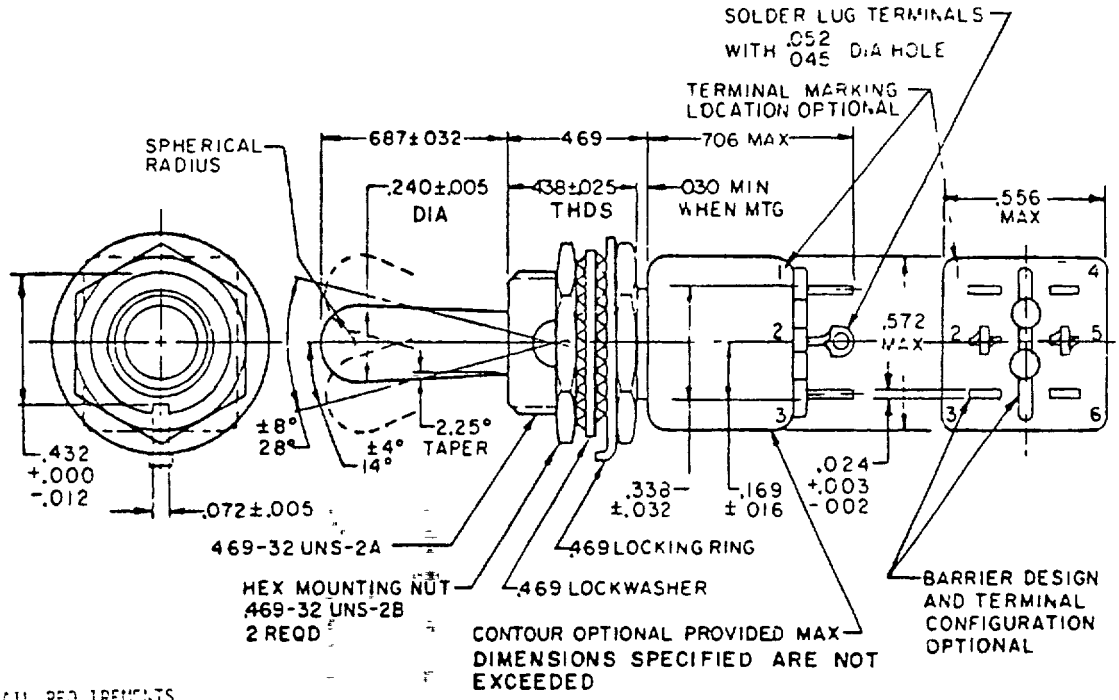


DETAIL REQUIREMENTS

| MS DASH NO 1/ | | CIRCUIT MADE BETWEEN TERMINALS AS INDICATED WITH THE TOGGLE LEVER IN THESE POSITIONS (a) | | | CURRENT CAPACITY IN AMPERES | | | | | | LIFE LOW CURRENT LEVEL SWITCHING 5 mV |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | RESISTIVE LOAD | | | INDUCTIVE LOAD | | | |
| | | | | | 28 VOLTS DC | 115 VOLTS 60 HERTZ AC | 115 VOLTS 400 HERTZ AC | 28 VOLTS DC | 115 VOLTS 60 HERTZ AC | 115 VOLTS 400 HERTZ AC | |
| | | OPPOSITE KEYWAY SIDE (d) | CENTER POSITION | KEYWAY SIDE (d) | | | | | | | |
| -711 | -211 | ON 2-3,5-6 | OFF | ON 1-2,4-5 | 5 | 2 | 3 | (b) 1 | 1 | 2 | (c) 25 µA |
| -721 | -221 | | NONE | OFF | | | | | | | |
| -731 | -231 | | | ON 1-2,4-5 | | | | | | | |
| -741 | -241 | | | NONE | | | | | | | |
| -771 | -271 | MOM-ON 2-3,5-6 | OFF | MOM-ON 1-2,4-5 | | | | | | | |
| -781 | -281 | NONE | | | | | | | | | |
| -811 | -311 | ON 2-3,5-6 | | | | | | | | | |

(a) Direction of movement of internal mechanism is opposite to the direction of the toggle movement
(b) With time constant of .020 ± 002 seconds.
(c) Contact resistance not to exceed 50 ohms during life, low current level switching
(d) Non-functional terminals shall not be supplied

1/ 700 and 800 series toggle seal (water) 15' head, 200 and 300 series toggle seal (water) 1/2" head See note 7.

(J) denotes changes

| | | | |
|---|---|---|---|
| P A NAVY-AS Other Cust ARMY - ER AF - 85 | International Interest ASCCAS 12/16A | TITLE SWITCH, TOGGLE - - POSITIVE BREAK, MINIATURE, TOGGLE SEALED SOLDER LUG, DOUBLE POLE, .469 MOUNTING BUSHING | MILITARY STANDARD MS90311 |
| Procurement Specification MIL-S-8834 | | SUPERSEDES MS00903III (USAF) | PAGE 1 OF 2 |

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5930-1276 - 2

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-01-23T20:34Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense and for repetitive use shall be made from this document when applicable

User activities Army - MI, AT Navy - Air Force -
Review activities Army - AR, AV Navy - EC Air Force - 11, 17, 99

APPROVED 13 JUN 66 REVISED (F) 21 Sep 1977 G 31 MARCH 1978 (H) 16 Oct 1979 (J) 18 Oct 1985

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

User activities: Army - MI, AT; Navy - ; Air Force -

Review activities: Army - AR, AV; Navy - EC; Air Force - 11,17,99

FED SUP CLASS
5930

| INCHES | MM | INCHES | MM | INCHES | MM |
|---|---|---|---|---|---|
| .002 | 05 | 030 | .76 | .432 | 10 97 |
| .003 | .08 | 032 | .81 | .438 | 11.13 |
| 005 | .13 | 045 | 1.14 | .469 | 11.91 |
| .010 | .25 | .052 | 1.32 | 556 | 14 12 |
| 012 | .30 | 072 | 1.83 | .572 | 14 53 |
| .016 | .41 | .169 | 4.29 | 687 | 17 45 |
| .024 | .61 | 240 | 6 10 | 706 | 17 93 |
| .025 | .64 | 338 | 8.59 | | |

(J) NOTES:

1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerances are ± 010 (0 25 mm) on decimals and ± 5° on angles
4. For hardware detail specifications see appendix of MIL-S-8834.
5. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence
6. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein
7. Toggle seal test Method I for 700 and 800 series, Method II for 200 and 300 series
8. Shock Method I and Method II (high impact). The switch shall be electrically and mechanically operative at the conclusion of the shock test except there can be mechanical transfer of the contact mechanism at all levels when tested in accordance with Method II (high impact).
9. Maximum weight .0463 pound (21 grams)
10. Strength of terminals. 5 pounds normal to the mounting plane and 2 pounds in other planes.
11. Altitude 50,000 feet
12. 115 V ac, 60 hertz electrical endurance tests are to be performed at room temperature and pressure.

APPROVED 13 JUN 66 REVISED (J) FOR CHANGE SEE PAGE 2

| | | | |
|---|---|---|---|
| P A NAVY - AS<br>Other Cust<br>ARMY - ER<br>AF - 85 | International Interest<br>ASCCAS<br>12/16A | TITLE SWITCH, TOGGLE - - POSITIVE BREAK, MINIATURE, TOGGLE SEALED SOLDER LUG, DOUBLE POLE, .469 MOUNTING BUSHING | MILITARY STANDARD<br>MS90311 |
| Procurement Specification<br>MIL-S-8834 | SUPERSEDES<br>MS0090311(USAF) | | PAGE 2 OF 2 |

DD FORM 1 MAY 73 672 (Coordinated) Preparing activity: Army - Downloaded: 2026-10-23T20:34Z

Check the source to verify that this is the current version before use.