MILITARY SPECIFICATION

BUMPER, RUBBER, DUPLEX ROUND

1. SCOPE

1.1 This specification covers a duplex round rubber bumper.

2. APPLICABLE DOCUMENTS

* 2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of the specification to the extent specified herein.

SPECIFICATIONS

Federal

V-T-276	Thread, Cotton
PPP-B-601	Boxes, Wood, Cleated-Plywood
PPP-B-636	Box, Fiberboard
PPP-T-60	Tape; Pressure-Sensitive Adhesive; Waterproof, For Packaging

Military

MIL-P-116	Preservation, Methods Of
MIL-R-6130	Rubber, Cellular, Chemically Blown
MIL-C-10799	Cloth, Coated, Cotton, Vinyl Coated, Fire And Mildew Resistant

STANDARDS

Federal

FED-STD-595	Colors

Military

MIL-STD-129	Marking For Shipment And Storage
MIL-STD-130	Identification Marking Of US Military Property
MIL-STD-143	Specifications And Standards, Order Of Precedence For The Selection Of
MIL-STD-794	Parts And Equipment Procedures For Packaging And Packing Of
MIL-STD-1186	Cushioning, Anchoring, Bracing, Blocking And Waterproofing; With Appropriate Test Methods

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:48Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

OFFICIAL CLASSIFICATION COMMITTEE

Uniform Freight Classification Rules

(Application for copies should be addressed to the Official Classification Committee, Room 202, Union Station, 516 West Jackson Boulevard, Chicago IL 60606.)

3. REQUIREMENTS

3.1 Selection of specifications and standards. Specifications and standards for necessary commodities and services not specified herein shall be selected in accordance with MIL-STD-143.

3.2 Materials. All materials used in the construction of the bumper shall be new and unused.

* 3.3 Design and construction. The bumper shall be constructed of two cellular, sponge-rubber cores completely covered on their curved surfaces with a woven cotton fabric coated as specified herein. The woven cotton fabric surrounding the rubber cores may be permanently bonded to the cores by vulcanizing at the time of manufacture or, if not, the fabric shall be sewn snugly around the rubber cores. The rubber cores shall be in the cured condition after final processing of the bumper. The bumper shall conform to Figure 1 in its final condition ready for shipment.

* 3.3.1 Cores. The cores shall be of cellular rubber conforming to MIL-R-6130, type I or type II, grade A, condition medium.

3.3.2 Fabric. The fabric material shall conform to MIL-C-10799, type II, class 4, Table I. The coated color shall be yellow, color 33538, conforming to FED-STD-595.


3.3.3 Stitching. The fabric cover shall be secured at the center by two rows of stitching with thread conforming to size 12/4 of V-T-276, type optional. The stitching shall be as shown on Figure 1 and shall have 4 to 8 stitches per inch.

3.3.4 Grommets. At intervals of 6 ±1/4 inch, the bumper shall have 1/2 by 3/4 inch oblong brass grommets across the flange and a 1/4 by 7/16 inch opening after installation. The formed flange shall be on the seam side of the bumper. The flange shall be securely formed without a washer.

3.4 Length. Unless otherwise specified (see 6.2), the bumper shall be furnished in 100 ±1/2 foot lengths.

3.5 Identification of product. Each 100 foot length of bumper shall be marked for identification in accordance with MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:48Z
Check the source to verify that this is the current version before use.

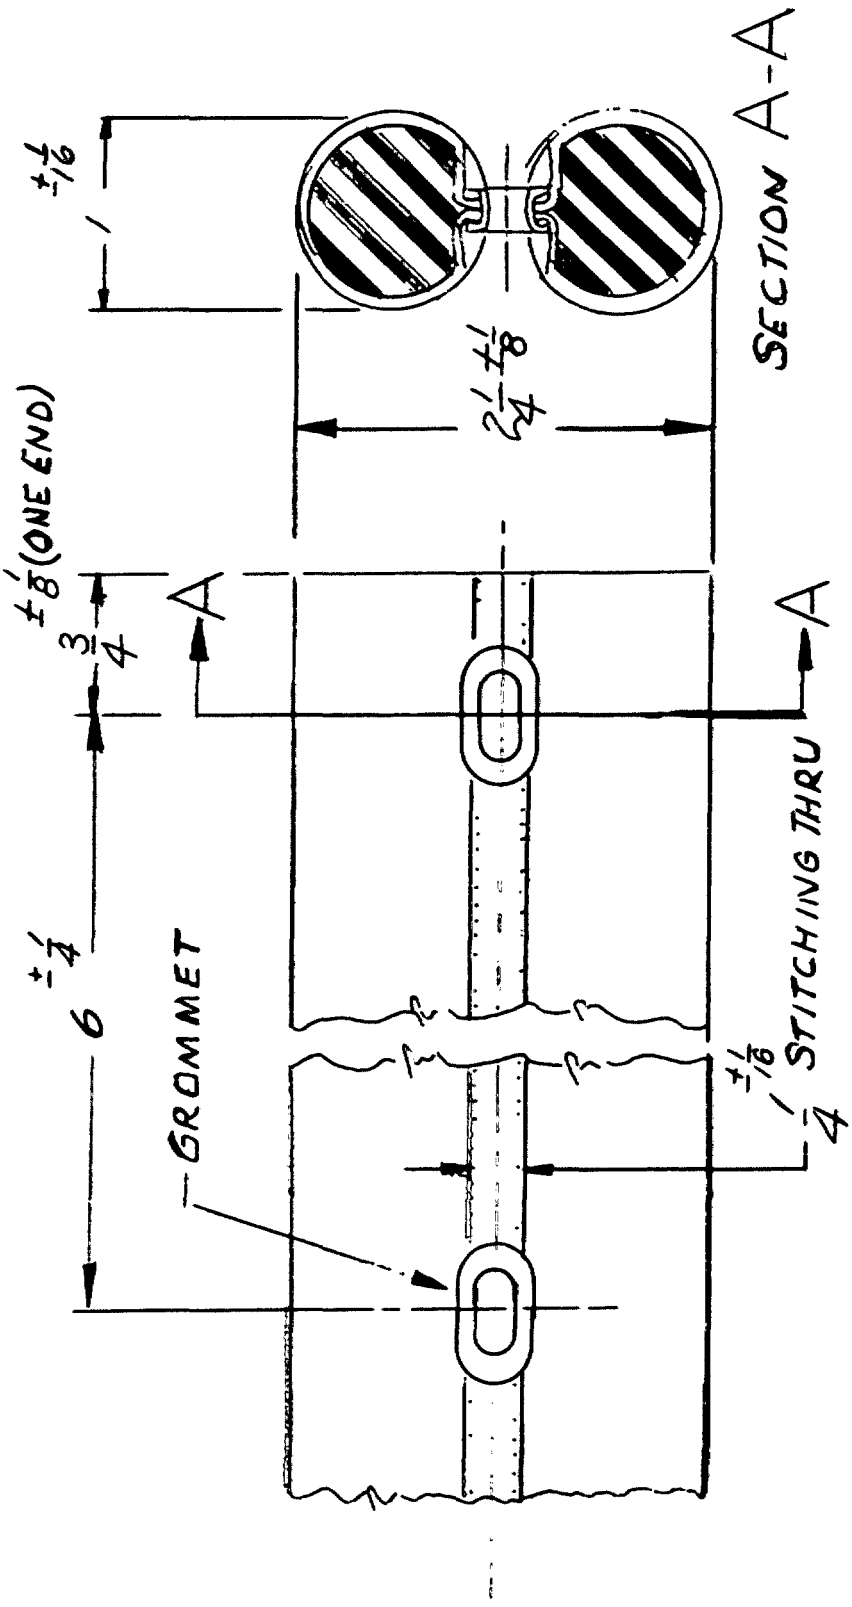

DIMENSIONS IN INCHES

FIGURE 1 - BUMPER

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:48Z
Check the source to verify that this is the current version before use.

3.6 Workmanship. The bumper shall be fabricated and finished in a workmanship manner. Particular attention shall be given to freedom from blemishes and defects, vulcanizing and stitching, et cetera.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of tests. The inspection and testing of the bumper shall be classified as acceptance tests.

4.3 Acceptance tests. Acceptance tests shall consist of the test described in 4.4.1.

4.4 Test methods.

4.4.1 Examination of product. The bumper shall be inspected to determine compliance with this specification with respect to material, stitching, vulcanizing, dimensions, and workmanship.

* 4.5 Inspection of the preservation, packaging, packing and marking for shipment and storage. Sample items or packs and the inspection of the preservation, packaging, packing and marking for shipment and storage shall be in accordance with the requirements of Section 5, or the documents specified therein.

5. PREPARATION FOR DELIVERY

* 5.1 Preservation and packaging. Preservation and packaging shall be Level A or C, as specified (see 6.2).

* 5.1.1 Level A.

* 5.1.1.1 Cleaning and drying. The bumper shall be cleaned in accordance with C-1 and dried with procedure D-1 and D-4 of MIL-P-116.

* 5.1.1.2 Unit packaging. The bumper shall be packaged in accordance with Method IC of MIL-P-116. The outer container shall be a fiberboard box conforming to PPP-B-636, style RSC, class overseas. The box shall be sealed with tape conforming to PPP-T-60, or equal.

* 5.1.2 Level C. Each bumper shall be packaged to afford protection against deterioration and physical damage during shipment from the supply source to the first receiving activity. The level may conform to the supplier's commercial practice when it meets the requirements of this level.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:48Z
Check the source to verify that this is the current version before use.

* 5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

* 5.2.1 Level A. The bumpers, packaged as specified in 5.1, shall be packed for shipment in shipping containers conforming to PPP-B-601, overseas type, style A or B. Closure and strapping shall be in accordance with the appendix to the container specification.

* 5.2.2 Level B. Level B packing shall be the same as Level A except the shipping container shall conform to PPP-B-601, domestic type, style A or B.

* 5.2.3 Level C. The bumpers, packaged as specified in 5.1, shall be packed to insure carrier acceptance and safe delivery at destination. Containers shall conform to the Uniform Freight Classification Rules or regulations of the other carriers as applicable to the mode of transportation. This may conform to the supplier's commercial practice when such meets the requirements of this level.

* 5.3 Physical protection. Interior cushioning, anchoring, blocking or bracing shall be in accordance with MIL-STD-1186.

* 5.4 Marking. In addition to any special marking required by the contract or order, unit packages and shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES

6.1 Intended use. The bumper is intended to be installed on maintenance stands to protect aircraft, from damage incurred in bringing such maintenance stands into use. The bumper may be fastened through grommets to the article by means of rivets, screws, nails, or other methods.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.

b. If bumper is to be furnished in other than 100-foot lengths (see 3.4).

c. Applicable level of preservation, packaging, and packing (see 5.1 and 5.2).

* 6.3 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Air Force - 82

Preparing Activity:
Air Force - 82

Project No. 1730-F148

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:48Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:48Z
Check the source to verify that this is the current version before use.