MIL-T-4873B

24 November 1976

SUPERSEDING
MIL-T-4873A
18 July 1966

MILITARY SPECIFICATION

TOOL KIT, PNEUMATIC TIRE VALVE SERVICING, AUTOMOTIVE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type of automotive, pneumatic tire valve stem servicing, tool kit.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

GG-G-91	-	Gages, Tire Pressure, Self Contained and Inflator-Gage, Pneumatic Tire.
GGG-F-325	-	File, Hand (American Pattern) and Rasp, Hand.
GGG-S-65	-	Saws, Hand.
GGG-T-558/1	-	Tool Box, Portable (Universal Type).

Beneficial comments (recommendations, additions, deletions and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Command, Natick, MA 01760 by using the self-addressed Standardization Document Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 5180

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:52Z
Check the source to verify that this is the current version before use.

PPP-B-636 - Boxes, Shipping, Fiberboard.
PPP-C-843 - Cushioning Material, Cellulosic.
PPP-P-291 - Paperboard, Wrapping and Cushioning.

MILITARY

MIL-P-116 - Preservation, Methods Of.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of specifications, standards, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply:

TIRE AND RIM ASSOCIATION YEARBOOK, 1976

(Application for copies should be addressed to the Tire and Rim Association, 3200 West Market Street, Akron, OH 44313.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Traffic Dept., 1616 P Street, N.W., Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT
Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Tool Kit components. The tool kit shall consist of a container conforming to type 1, class 2, size 16, olive drab finish of GGG-T-558/1, and the components (items 1 through 20) listed in table 1. The listed part numbers shall be the manufacturer's standard product which shall have met all established functional requirements and those specified herein. All other listed components shall conform to the requirements of the applicable references specifications. The Tire and Rim Association Yearbook may be used for information or reference purposes.

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:52Z
Check the source to verify that this is the current version before use.

TABLE I

Item No.	Quantity	Nomenclature	Dill Mfg. Co. part No.	A. Schrader and Son part No.	Bridgeport Brass Co. part No.
1	1 each	Tool, valve converting (see figure 1)	6212	7260	500
2	1 each	Tool, valve repair	5209	3522	67
3	1 each	Tool, inserting, inner tube valve stem			466
4	1 set	Wrench set (2 wrenches) (see figure 2)	6198 and 6002	5747	
5	1 each	Gage, inner tube stem spud (see figure 3)	6343	7799	799
6	1 each	Gage, air pressure, type II, class A, style 2 of GG-G-91			403A
7	1 each	Gage, air and liquid, type II, class B, style 3 of GG-G-91			402
8	1 each	Saw, metal cutting, type VIII, style B, size 7-1/2 of GGG-S-65			
9	1 each	File, flat, 6 inches long, type VII, style C of GGG-F-325			
10	1 each	Cap, inner tube, deflating	6108D	7657	68

Source: https://assist.dla.mil -- Downloaded: 2026-01-17T03:52Z
Check the source to verify that this is the current version before use.

TABLE I (cont'd)

Item No.		Quantity	Nomenclature	Dill Mfg. Co. part No.	A. Schrader and Son part No.	Bridgeport Brass Co. part No.
11	1/	1 each	Tool, inserter, extractor, valve core	5201	8769A	
12		1 each	Tool, valve stem cap	5210	1440	
13		1 each	Extractor, valve core (ease out, short)	6129	567A	470
14	1/	1 each	Extractor, valve core (ease out, long)	5203		
15	1/	1 each	Refacer, valve stem	5204		
16	1/	1 each	Tool, valve stem core seat cleaner	5205		
17	1/	1 each	Restorer, valve stem cap and core threads	5206		
18		1 each	Extension, air chuck	5211		
19		1 each	Tool, tubeless tire, valve installing	5215	992	506
20		1 each	Adapter, air, water, tractor inner tubes	6438A and 6438B	5791C with A and B bushing	955A

1/ Dill Mfg. Co. furnishes a kit, part No. 5200, which includes their part Nos. 5201 through 5206 inclusively.

Source: https://assist.dla.mil -- Downloaded: 2026-01-17T03:52Z
Check the source to verify that this is the current version before use.

3.2 Item tolerances. Tolerances on individual items shall conform to the manufacturer's standard practice or the referenced specification, as applicable.

3.3 Marking for identification. The tool kit container and components shall be marked in accordance with referenced specifications or the manufacturer's standard practice, as applicable.

3.4 Finish. All components shall have the manufacturer's commercial finish.

3.5 Workmanship. All components shall be clean and free from rust, fins, burrs, cracks, splits, rough edges or any defects which may impair serviceability, durability or appearance.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Sampling for inspection. Sampling for inspection shall be made in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated hereinafter.

4.2.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.2.2 End item inspection. The inspection lot shall consist of all complete tool kits offered for inspection at one time. The sample unit shall be one tool kit.

4.2.2.1 Visual examination. Visual examination of each sample unit shall be made for the defects in table II. The inspection level shall be level I with an acceptable quality level (AQL) of 2.5 defects, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:52Z
Check the source to verify that this is the current version before use.

TABLE II. Visual examination

Examine	Defect
Finish, container	Not olive drab.
Components	Component missing or not as specified (see 3.1). Not clean or smooth, cracks, burrs, splits or rough edges.
Instructions	Missing, illegible or incomplete.
Identification	Missing, illegible or incomplete.

* 4.2.3 Dimensional examination. Examination shall be made for compliance with dimensional requirements specified herein. The inspection level shall be S-2 with an acceptable quality level of 1.5 defects, expressed in terms of defects per hundred units.

* 4.2.4 Packaging inspection. An examination shall be made to determine that preservation-packaging, packing and marking as required by section 5 are complied with. Defects shall be scored as specified below. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of containers in the inspection lot. The inspection level shall be S-2 with an AQL of 4.0 defects, expressed in defects per hundred units.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.
Preservation	Preservative improperly applied or missing.
Materials	Component missing or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling; bulging or distortion of containers; blocking and cushioning inadequate, improper or missing.
Contents	Contents per container is more or less than required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:52Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. The components of the tool kit shall be preserved in accordance with method I of MIL-P-116 and placed in their respective compartments within the tool box. Cushioning material conforming to PPP-C-843 or PPP-P-291, or fiberboard pads, shall be used as necessary, to immobilize the tools within the tool box and to prevent damage during transit. Each complete tool kit shall then be placed in a snug-fitting fiberboard box conforming to type RSC, type CF, (variety SW), or type SF, class domestic of PPP-B-636. Closure shall be in accordance with method II of the appendix of the box specification, excpet that the inspection shall be in accordance with 4.2.4.

5.1.2 Commercial. The tool kits shall be preserved-packaged to afford adequate protection against corrosion, deterioration and damage during shipment from the supply source to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

5.2.1 Level A packing. Four complete tool kits, preserved-packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V and reinforced as specified in the appendix of the container specification, except that the inspection shall be in accordance with 4.2.4

5.2.2 Level B packing. Four complete tool kits, preserved-packaged as specified in 5.1, shall be packed in a snug-fitting shipping container conforming to style RSC, type CF, (variety SW), or type SF, class domestic of PPP-B-636. Closure shall be in accordance with method II of the appendix of the container specification, except that the inspection shall be in accordance with 4.2.4. When specified (see 6.2), the shipping container shall be V3c, V3s, or V4s, fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix thereto, except that the inspection shall be in accordance with 4.2.4.

5.2.3 Commercial packing. Tool kits, preserved-packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery destination at the lowest transportation rate for such supplies. The quantity

Source: https://assist.dla.mil -- Downloaded: 202640-17T03:52Z
Check the source to verify that this is the currentversion before use.

per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall be in accordance with Uniform Freight Classification or National Motor Freight Classification, as applicable.

* 5.3 Marking. In addition to any special marking required by the contract or order, interior boxes and shipping containers shall be marked in accordance with MIL-STD-129. Marking for commercial shipments shall be the same as that specified for level C.

6. NOTES

6.1 Intended use. The tool kit covered by this specification is intended for use by automotive maintenance activities responsible for maintenance of automotive ground equipment tires.

* 6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Selection of the applicable levels of preservation-packaging and packing (see 5.1 and 5.2).
(c) When weather-resistant class fiberboard shipping containers are required for level B shipment (see 5.2.2).

6.3 Data item description. Operating and maintenance instructions and a list of components shall be furnished with each kit.

6.4 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Air Force - 99

Preparing activity:

Army - GL

Project No. 5180-0088

Review activities:

Army - WC

User activities:

Army - CE, AT
Navy - YD, MC

Source: https://assist.dla.mil -- Downloaded: 202640-17T03:52Z
Check the source to verify that this is the currentversion before use.


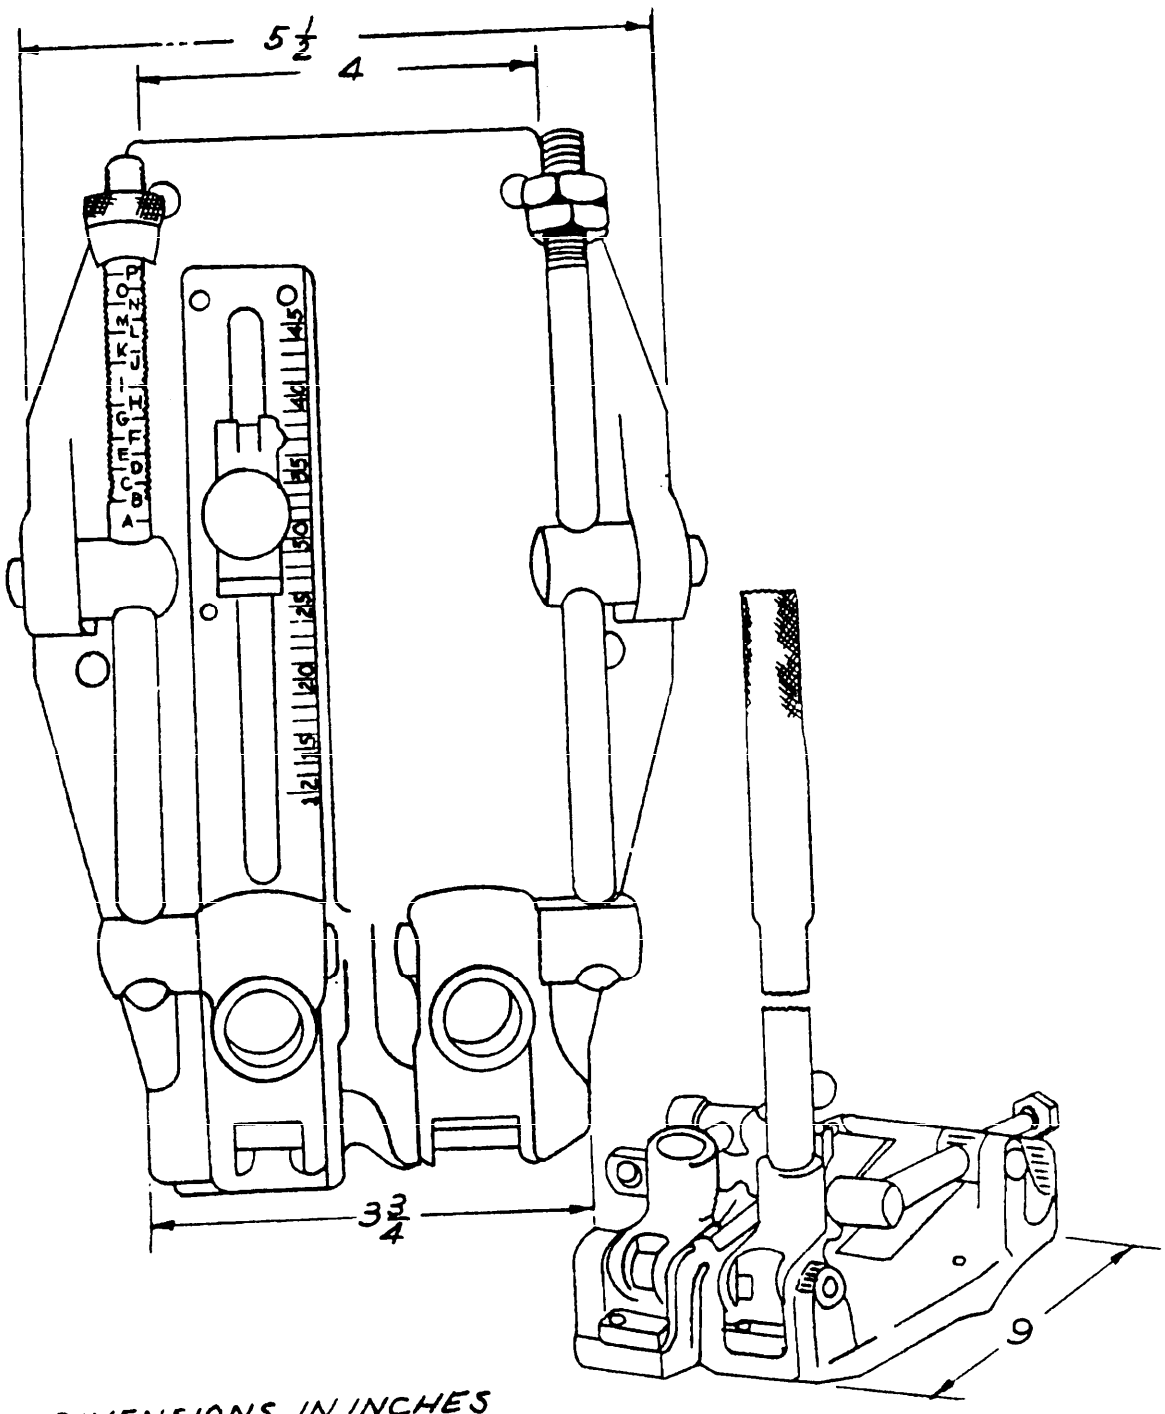


FIGURE 1. - Tool, Valve, Converting


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:52Z
Check the source to verify that this is the current version before use.

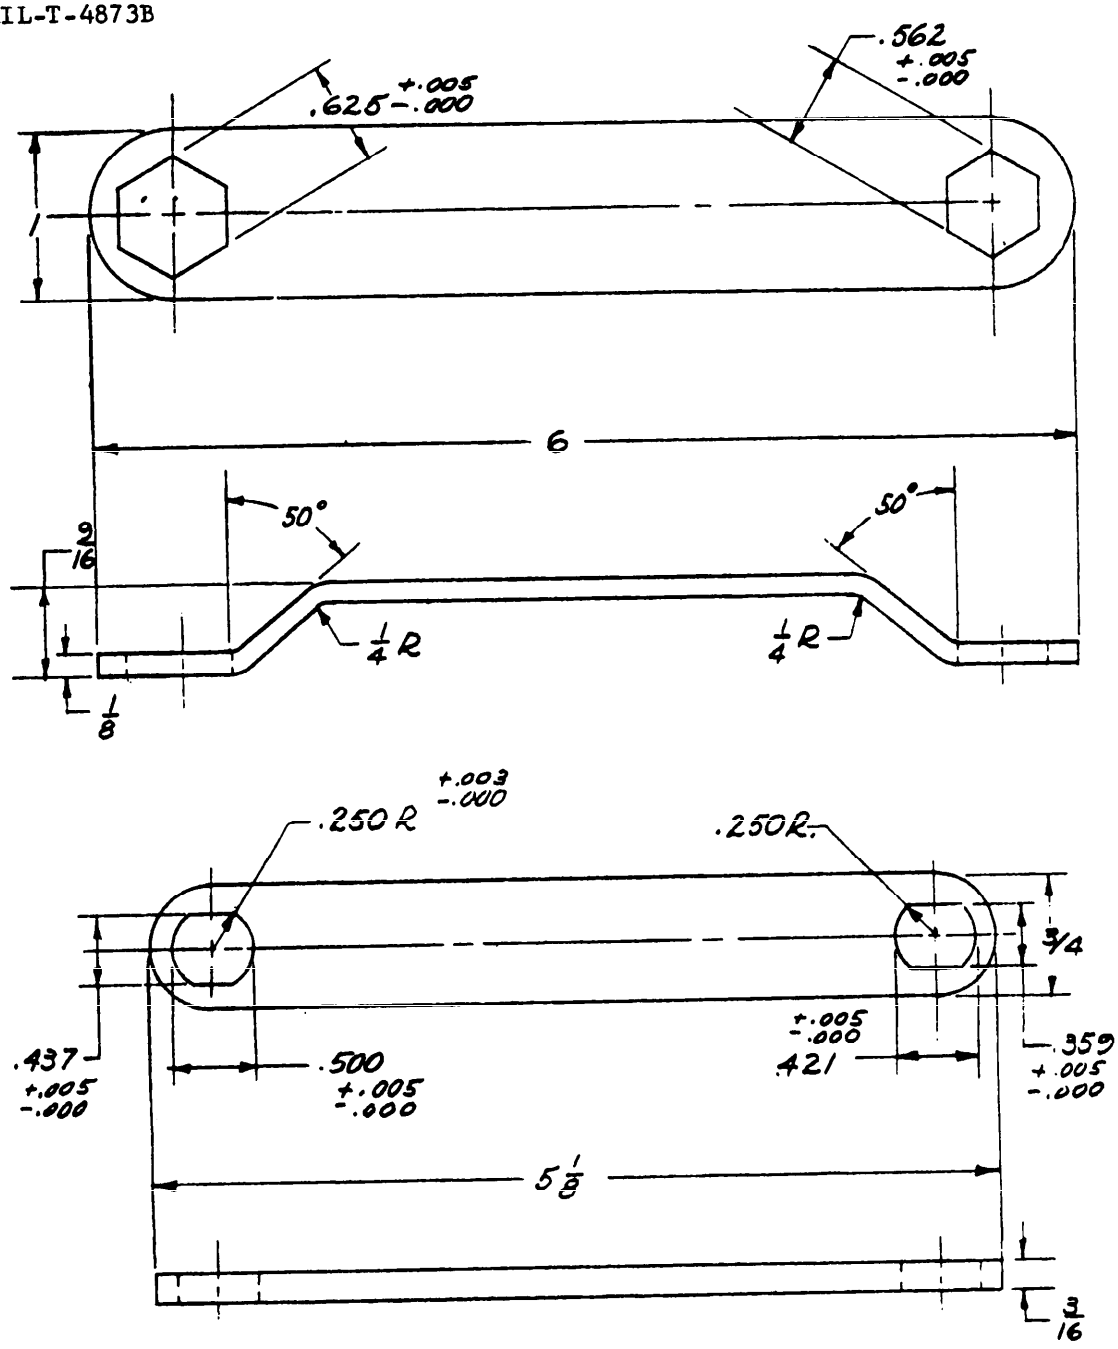

DIMENSIONS IN INCHES
UNLESS OTHERWISE SPECIFIED
TOLERANCES ANGLES ± 5°
DECIMALS
FRACTIONS ± 1/64

FIGURE 2. - Wrench Set

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:52Z
Check the source to verify that this is the current version before use.

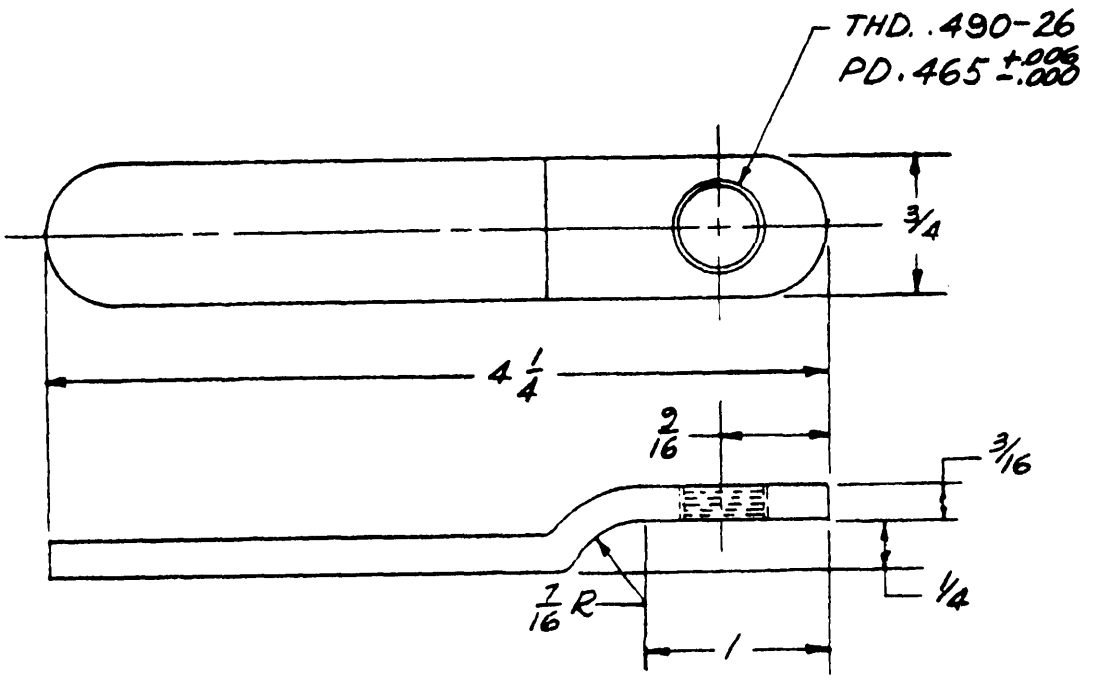

DIMENSIONS IN INCHES
UNLESS OTHERWISE SPECIFIED
TOLERANCES: ANGLES ± 5°
DECIMALS
FRACTIONS ± 1/64

FIGURE 3. - Gage, Stem Spud, Inner Tube (Rethreader)

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:52Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:52Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

)OCUMENT IDENTIFIER AND TITLE

MIL-T-4873B, Tool Kit, Pneumatic Tire Valve Servicing, Automotive

IAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

REMARKS

UBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

)D FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

[illegible] PLEASE EXPLAIN BELOW.

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:52Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
US ARMY NATICK RESEARCH and DEVELOPMENT COMMAND
NATICK, MASSACHUSETTS 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
DRXNM-TD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

U.S. MAIL

Commander
US Army Natick Research and Development Command
ATTN: DRXNM-TD
Natick, MA 01760

NATICK OP 1 Apr 76
FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:52Z
Check the source to verify that this is the current version before use.