INCH-POUND

A-A-59357A
10 AUG 2023
SUPERSEDING
A-A-59357
03 NOV 1998

COMMERCIAL ITEM DESCRIPTION

FASTENERS, BELT; CLIPS, ENDS WITH HOOK: AND KEEPERS, SLIDE

The General Services Administration has authorized the use of this commercial item description as a replacement for MIL-F-411 for all federal agencies.

1. SCOPE. This commercial item description covers belt fasteners, strap end clip with hooks, and slide keepers, which are intended for use on web belts and other equipage items.

2. CLASSIFICATIONS. The items shall be of the following types, styles, sizes, and construction as specified:

Type I - Fastener, Belt:
Construction A - Copper Alloy (Brass) Casting
Style 1. - 3-3/4 inch, male and female
Style 2. - 2-5/16 inch, male and female

Type II - Clip, End Strap with Hook:
Construction A - Brass Sheet and Copper Alloy Wire
Construction B - Steel Sheet and Copper Alloy Wire

Type III - Keeper, Slide:

Size 1 – 1 inch
Construction A - Brass Sheet
Construction B - Steel Sheet
Construction C - Brass Sheet
Construction D - Steel Sheet

Size 2 – 12-1/4 inch
Construction A - Brass Sheet
Construction B - Steel Sheet
Construction C - Brass Sheet
Construction D - Steel Sheet
Construction E - Steel Sheet

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: Attn: DLA Troop Support, 700 Robbins Avenue, Philadelphia, PA 19111-5096. Since contact information can change, verify the currency of the address information using Acquisition Streamlining and Standardization Information System (ASSIST) online database https://assist.dla.mil/.

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited

AMSC N/A FSC 8315

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS. The belt fasteners, end straps clips with hooks and slide keepers shall use the materials as specified in paragraph 3.2 and shall be constructed in accordance with the design, details and dimension as shown on figures 1, 2, 3a and 3b.

3.1 Fastener, Belt, (See Fig.1). The Type I, Style 1 and 2 fasteners shall be cast of copper alloy (brass).

3.1.1 Clip, End Strap with Hook, (See Fig.2). The construction A, body shall be stamped from 0.025 inch (22 gauge) brass sheet or strip. The construction B, body shall be stamped from 0 .023 inch (24 gauge) steel sheet or strip. The construction A, hook shall be formed of 0.028 inch (8 gauge) copper alloy wire. The construction B, hook shall be formed of 0.020 inch (11 gauge) diameter steel wire. Hook ends shall be formed through a complete angle of 180 degrees.

3.1.2 Keeper, Slide, (See Figs.3a and 3b). The construction A and C keepers shall be fabricated of 0.040 inch (18 gauge) brass sheet or strip. The construction B, D and E keepers shall be fabricated of 0.035 inch (20 gauge) steel sheet or strip. At the option of the manufacturer, either construction A or C may be used for brass keeper and either construction B, D, or E, as applicable, may be used for steel keepers. Keepers shall be brazed or spot welded as applicable.

3.2 Materials:

3.2.1 Copper alloy.

3.2.1.1 Copper alloy (brass) casting shall conform to type I, condition as cast, alloy A3 of ASTM B22/B22M.

3.2.1.2 Brass, sheet or strip shall conform to copper alloy number 268, half-hard of ASTM B36/B36M or ASTM B121/B121M.

3.2.1.3 Copper alloy wire shall conform to alloys numbers 260, 270, 274, half-hard of ASTM B121/B121M, B134/B134M or B159/B159M.

3.2.2 Steel.

3.2.2.1 Steel, sheet or strip shall be cold, rolled, any temper and of commercially quality and shall conform to ASTM A1008/A1008M.

3.2.2.2 Steel wire shall conform to AISI No. 1015, finish 1 and annealed in the process of ASTM A853.

3.2.3 Enamel shall be a lead and chromate free, semigloss, alkyd enamel with a low (VOC) content of not more than 420grms /liter. The color shall be semigloss black No. 27038 of SAE-AMS-STD-595, which can be acquired from SAE International (https://www.sae.org/).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

3.3 Finish. The brass belt fasteners, brass end clips with hooks and brass slide keepers shall be cleaned as specified in ASTM B281, prior to the finish application, then given a black chemical finish 0.00005 through 0.0002 inches thick. The color shall be a semigloss black, No. 27038, in accordance with SAE-AMS-STD-595. The steel end clips with hooks and steel slide keepers shall be cleaned using only cleaning methods for ferrous surfaces and then given a chromate treated zinc coating conforming to Type II of ASTM B633, followed by baked enameling. The enamel used (See Para.3.2.3), shall dry to a smooth and uniform film free from runs, orange peel, wrinkles, or areas of no film.

3.4. Label/Marking. The label shall be as specified in the contract or purchase order. The belt fasteners, strap end clips with hooks and slide keepers shall be permanently and legibly marked for identification with the manufacture's name or trademark of such characters as to be identifiable with the manufacturer. The marking shall be made on the back surface of the belt fasteners, brass end clips with hooks and brass slide keepers in such a manner that the front surface shall show no signs of penetration, unevenness or cause distortion on any part of the belt fasteners, brass end clips with hooks and brass slide keepers. All marking shall be made prior to assembly and finishing.

4. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR), which can be acquired here: FAR | Acquisition.GOV.

5. QUALITY ASSURANCE PROVISIONS

5.1 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description and that product conforms to the producer's own drawings, specifications, standards and quality assurance practices, and is the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

5.2 Visual examination. Each item shall be examined for the defects listed below:

DEFECTS. Not finished or finished not as specified; evidence of corrosion; Color not as specified; Finish not clean and uniform; area of no film; Separation of color or finish rough; Components not cast, stamped or formed to the proper shape; Poor workmanship; Any component part omitted; not properly assembled; Any part missing; fractured, split, bent, dented sprung or malformed; Holes (where required) missing in end clip with hook; Tongue of slide keeper is not formed as specified on drawing, when applicable; Not spot welded or brazed where required, weld or braze is fractured, crack, porous, incomplete or not fused; is undercut, metal is burned or damaged in welding or brazing, weld or braze is not smooth and uniform; Label missing, incorrect or illegible; measurement of item not as specified; Any dimension not within the specified tolerance; any items not packaged in accordance with contract or purchase order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

5.3 Acceptance Criteria. Acceptance criteria shall be as specified in the contract or purchase order.

6 PACKAGING. The preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES

7.1 Source of Government documents. Copies of military and Federal documents are available from: https://assist.dla.mil

7.2 Source of non-Government documents

ASTM International

(Applications for copies should be addressed to ASTM International, 100 Barr Harbor Drive, West Conshohocken, PA 19426-2959)

AMERICAN IRON AND STEEL INSTITUTE (AISI)
Steel Products Manual - Wire and Rods, Carbon Steel

(Applications for copies should be addressed to American Iron and Steel Institute, 25 Massachusetts Avenue NW, Suite 800, Washington, DC 20001)

8. Revision description: Reference documents and sources addresses updated.

MILITARY INTERESTS


Custodians:
Army – GL
Navy – NU
Air Force – 11

PREPARING ACTIVITY:
DLA – CT

Review Activities:
Army – MD
Navy – MC

Project Number:
8315-2023-003

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

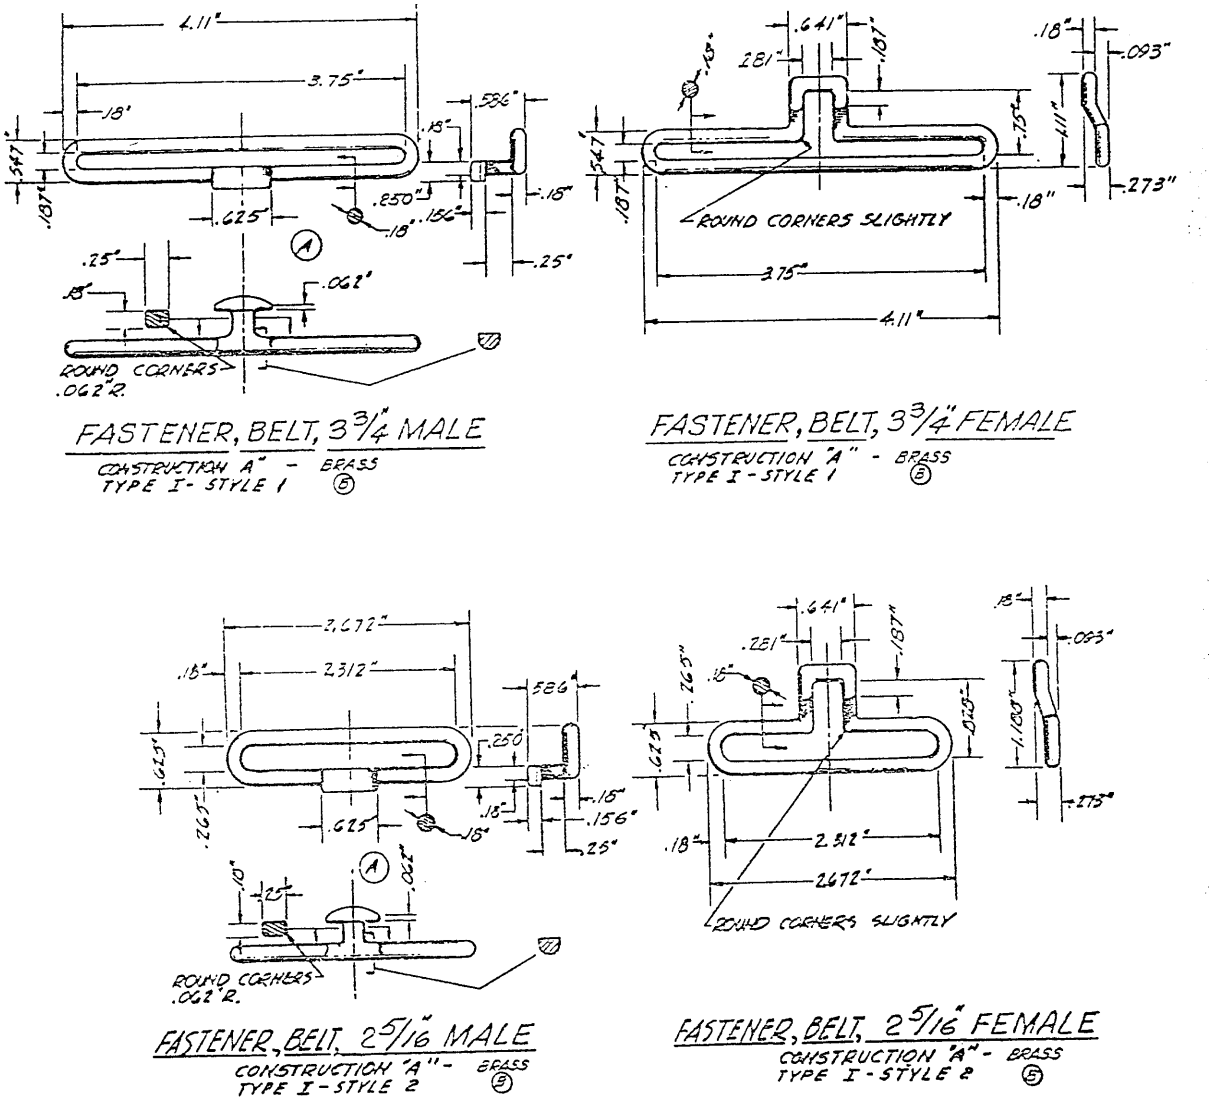

NOTES:


1. Unless otherwise stated, fabrication tolerances are:
   Decimal ± .015", whole numbers and fraction ± 1/32", degrees ±

2. Swage to 0.16 maximum after forming is allowed.

FASTENER, BELT - TYPE I

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

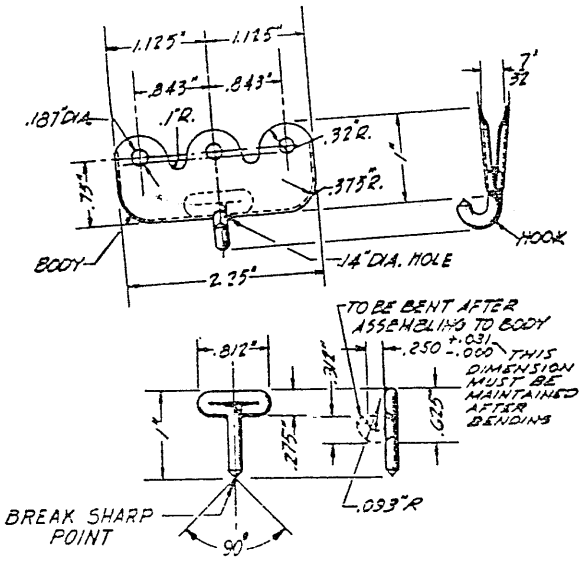

HOOK

CLIP END STRAP WITH HOOK

CONSTRUCTION "A" - BRASS
CONSTRUCTION "B" - STEEL
TYPE II

NOTES:


1. Unless otherwise stated, fabrication tolerances are:
   Decimal ± .015", whole numbers and fraction ± 1/32", degrees ±

2. Swage to 0.16 maximum after forming is allowed.


CLIP, END AND STRAP W/ HOOK - TYPE II

FIGURE 2.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

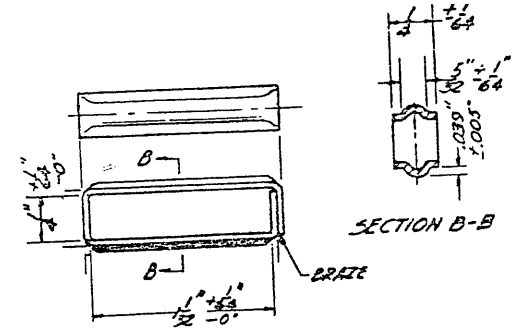

1" KEEPER, SLIDE
CONSTRUCTION "A" - BRASS
TYPE III
SIZE 1

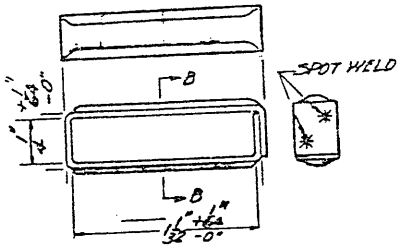

1" KEEPER, SLIDE
CONSTRUCTION "B" - STEEL
TYPE III
SIZE 1

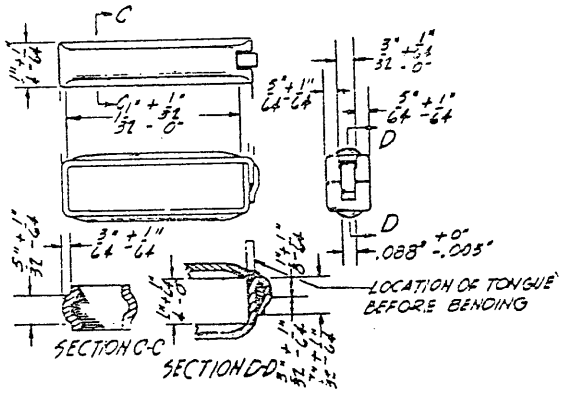

1" KEEPER, SLIDE
CONSTRUCTION "C" - BRASS
CONSTRUCTION "D" - STEEL
TYPE III
SIZE 1


NOTES:

1. Unless otherwise stated, fabrication tolerances are: Decimal ± .015", whole, numbers and fraction ± 1/32", degrees ±
2. Swage to 0.16 maximum after forming is allowed.

KEEPERS, SLIDE - TYPE III

FIGURE 3a.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

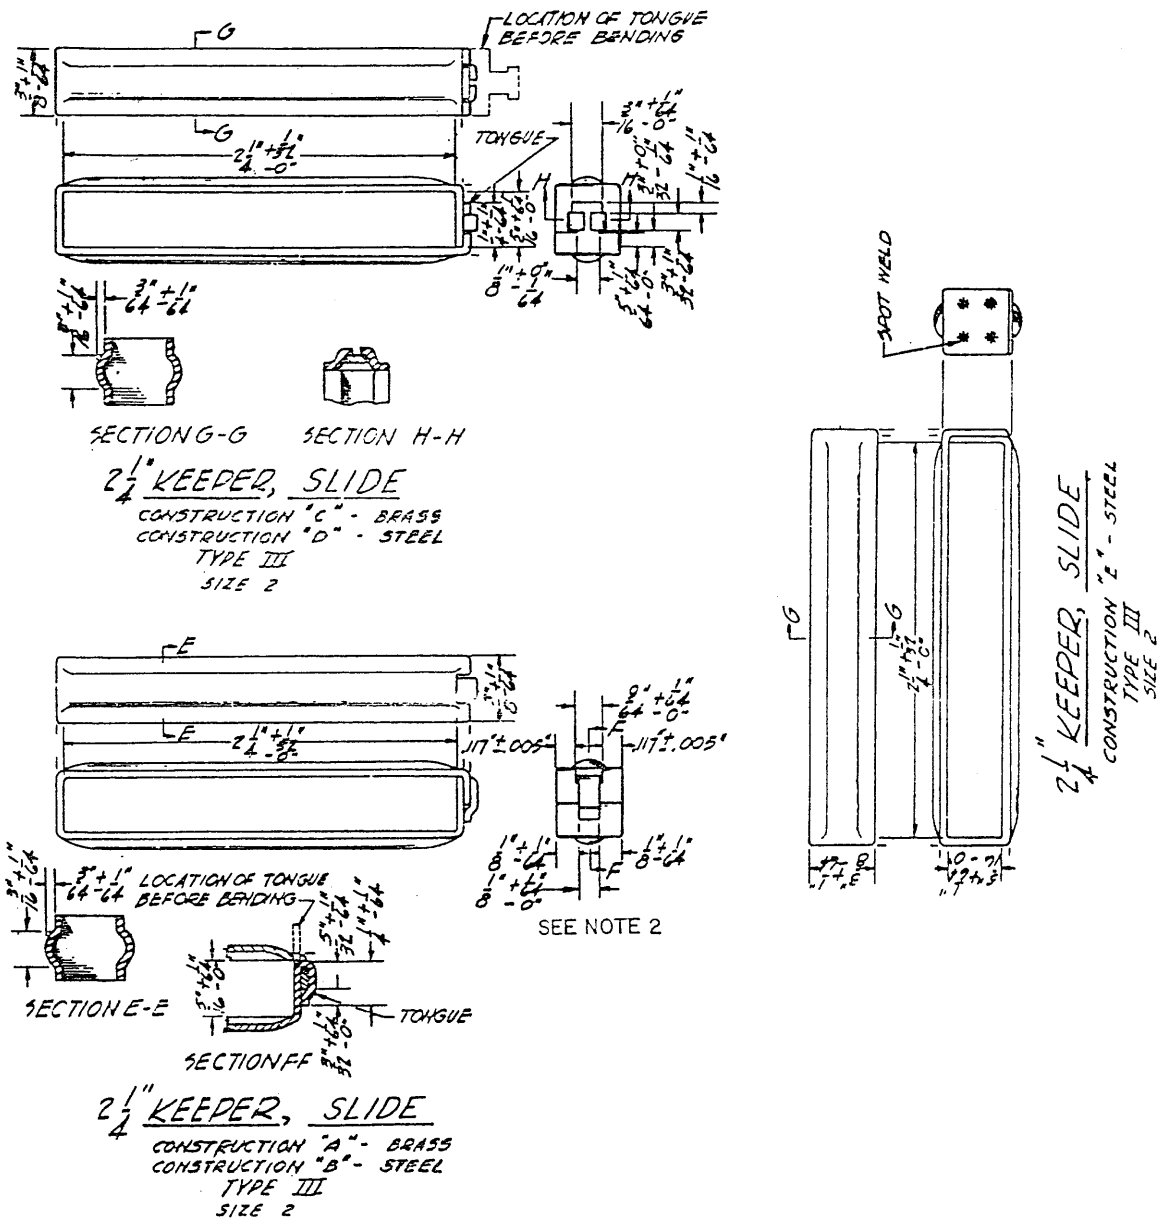

KEEPERS, SLIDE - TYPE III

FIGURE 3b.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.