[INCH-POUND]
A-A-59414A
19 May 2023
SUPERSEDING
A-A-59414
22 May 2000

COMMERCIAL ITEM DESCRIPTION

SIRENS, OUTDOOR WARNING, ELECTRONIC AND ELECTRIC-MOTOR-DRIVEN

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers electronic and electric-motor-driven outdoor warning sirens capable of providing 360-degree coverage. The sirens shall be complete with all controls and auxiliary equipment, and suitable for mounting roofs or other supporting structures without additional protection from the weather.

2. CLASSIFICATION. The sirens shall be of the following types, classes, styles, and sizes. The type, class, style, and size to be furnished shall be as specified (see 7.2(b)).

Type I - Electric-motor-driven vertical siren
Type II - Electric-motor-driven horizontal siren
Type III - Electronic siren

Class 1 - Uncoded
Class 2 - Coded

Style A - Omnidirectional
Style B - Rotating directional

Size - See table I

Comments, suggestions, or questions on this document should be emailed to: usarmy.apg.devcom-c5isr.mbx.standardization-crx@army.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil/.

AMSC N/A FSC 6350

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:13Z
Check the source to verify that this is the current version before use.

TABLE I Siren sizes.

Size	Sound pressure level, decibels at 100 feet
01	100 – 102
02	103 – 105
03	106 – 108
04	109 – 111
05	112 – 114
06	115 – 117
07	118 – 120
08	121 – 123
09	124 – 126
10	127 – 129
11	130 – 132
12	133 – 135

3. SALIENT CHARACTERISTICS

3.1 General requirements. The siren shall be new and one of the manufacturer's current models capable of operation in accordance with the requirements herein. All parts subject to wear, breakage, or distortion shall be accessible for adjustment, replacement, and repair. The sirens shall be electric-motor-driven or electronic, and shall be complete in all details. They shall be of rugged construction to withstand vibration and exposure to severe weather conditions without excessive deterioration and shall be capable of operating after long periods of nonuse. The sirens shall be constructed so that dust, water, and condensation within the unit will be at a minimum. Openings shall be screened to prevent the entrance of animals and larger insects.

3.2 Components. The siren shall include, as a minimum, the following components:

3.2.1 Housing. The motor-driven siren or electronic siren speaker housing shall be constructed of powder coat painted sheet metal, color-impregnated fiberglass, fiberglass-reinforced molded polycarbonate resin, or aluminum (electronic siren speakers only). For sheet metal, all joints shall be riveted or welded securely, except bolts that shall be used to fasten portions made removable for inspection and maintenance of the interior mechanism. Sheet metal screws shall not be used. Fiberglass and polycarbonate housings shall be drilled and shall be securely bolted to the supporting framework.

3.2.2 Mounting. A base shall be provided for mounting the siren on a flat, horizontal surface; or brackets for a slant roof or pole mount.

3.2.3 Fan and stator (motor-driven sirens only). The fan and stator for motor-driven sirens shall be made of aluminum. The fan and other rotating parts of the siren shall be in static and dynamic balance. The fan shall be fastened securely to the motor shaft and a key shall be used to prevent slipping. Baffles shall be provided within the housing, or the design of the stator and housing shall be such that the input air is prevented from mixing with the output air.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:13Z
Check the source to verify that this is the current version before use.

3.2.4 Code transmitter. The controls for class 2 coded siren shall include a code transmitter suitable for the transmission of coded signals as specified (see 7.2(c)).

3.2.5 Electrical system. Unless otherwise specified (see 7.2(d)), the electrical system shall conform to the American National Standards Institute/National Fire Protection Association (ANSI/NFPA) 79, "Electrical Standard for Industrial Machinery" (DoD adopted).

3.2.6 Electric motors. The motor for an electric-motor-driven siren shall have sealed and permanently lubricated ball or roller bearings, shall be energy efficient, and shall conform to the National Electrical Manufacturers Association (NEMA) MG-1, "Motors and Generators" (DoD adopted), and Underwriters Laboratories (UL) 674, "Electric Motors and Generators for use in Division 1 Hazardous (Classified) Locations" (DoD adopted). The motor shall be suitable for operation on an electric circuit with voltage (AC or DC), frequency, and phase (single or three-phase) as specified (see 7.2(e)).

3.2.6.1 Control cabinets. Control cabinets for motor starters or electronic packages shall be of the proper size and suitable for the specific application, and shall conform to NEMA ICS 6, "Industrial Controls and Systems: Enclosures" (DoD adopted). Unless otherwise specified (see 7.2(f)), the enclosure shall conform to NEMA type 1 for indoor mounting or type 3R for outdoor mounting, as defined by NEMA 250, "Enclosures for Electrical Equipment (1000 Volts Maximum)" (DoD adopted).

3.3 Performance. Unless otherwise specified (see 7.2(g)), the siren shall meet the sound pressure level (SPL) requirements shown in table II when tested in accordance with section 5.3 through 5.3.3.

TABLE II Performance requirements.

Size	Minimum sound pressure level at 100 feet, decibels
01	100
02	103
03	106
04	109
05	112
06	115
07	118
08	121
09	124
10	127
11	130
12	133

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:13Z
Check the source to verify that this is the current version before use.

4.2 Environmental protection. The item shall meet all applicable Environmental Protection Agency (EPA) restrictions in effect on the date of the contract. These regulations apply to the emission of materials hazardous to the environment or the user's health and shall be adhered to during the manufacturing, service, transportation, storage, and operation/use of the item.

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance.

5.2 Inspection. The siren shall be inspected to determine compliance with all requirements specified in this CID.

5.3 Testing. Unless otherwise specified (see 7.2(h)), the siren shall be tested in accordance with sections 5.3.1 through 5.3.4.

5.3.1 Test setup and conditions. Unless otherwise specified (see 7.2(i)), the manufacturer shall conduct all tests required by the Government. The manufacturer shall provide test instruments and equipment with calibration traceable to National Institute of Standards and Technology (NIST) and shall provide certification of calibration as specified (see 7.2(j)). Unless otherwise specified (see 7.2(k)), the siren shall be tested in accordance with environmental conditions specified in ANSI/Acoustical Society of America (ASA) S12.14, "Methods for the Field Measurement of the Sound Output of Audible Public Warning Devices Installed at Fixed Locations Outdoors".

5.3.2 Operational test. The siren shall be operated in accordance with the manufacturer's standard operating procedures. Proper operation of all controls and features shall be verified during the trial period.

5.3.3 Performance tests. The siren shall be tested for conformance with section 3.3 in accordance with ANSI/ASA S12.14.

5.3.4 Optional tests. Optional tests shall be conducted as specified (see 7.2(l)).

5.4 Acceptance. Unless otherwise specified (see 7.2(m)), preliminary and final acceptance tests shall be conducted at the manufacturer's site. The results of the SPL tests shall be compared with the requirements shown in table II. Failure of the siren to meet the requirements shown in table II shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:13Z
Check the source to verify that this is the current version before use.

6. PACKAGING

6.1 Preservation, packing, and marking. For acquisition purposes, the sirens shall be preserved, packed, and marked as specified in the acquisition order (see 7.2(n)).

7. NOTES

7.1 Sources of documents.

7.1.1 FAR. The FAR document may be obtained from https://www.acquisition.gov/far.

7.1.2 ANSI standards. Copies of ANSI standards may be obtained from the American National Standards Institute, 25 West 43rd Street, 4th Floor, New York, NY 10036, or https://webstore.ansi.org.

7.1.3 NFPA standards. Copies of NFPA standards may be obtained from the National Fire Protection Association, 1 Batterymarch Park, Quincy, MA 02169-7471, or https://www.nfpa.org.

7.1.4 NEMA standards. Copies of NEMA standards may be obtained from the National Electrical Manufacturers Association, 1300 17th Street N #900, Arlington, VA 22209, or https://www.nema.org.

7.1.5 ASA standards. Copies of ASA standards may be obtained from the Acoustical Society of America, Suite 110, 1305 Walt Whitman Road, Melville, NY 11747-4300, or https://acousticalsociety.org.

7.1.6 UL standards. Copies of UL standards may be obtained from Underwriters Laboratories Inc., 333 Pfingsten Road, Northbrook, IL 60062, or https://www.ul.com.

7.1.7 EPA regulations. Copies of EPA regulations may be obtained from https://www.epa.gov.


7.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document
b. Type, class, style, and size of siren required (see 2)
c. Code transmitter requirements, as specified (see 3.2.4)
d. Electrical requirements, if different (see 3.2.5)
e. Type motor, as specified (see 3.2.6)
f. Type enclosure, if different (see 3.2.6.1)
g. Performance, if different (see 3.3)
h. Testing, if different (see 5.3)
i. Test responsibility, if different (see 5.3.1)
j. Certification of calibration, as specified (5.3.1)
k. Test environmental conditions, if different (see 5.3.1)
l. Optional tests, as specified (see 5.3.4)
m. Acceptance tests site, if different (see 5.4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:13Z
Check the source to verify that this is the current version before use.

n. Packaging requirements (see 6.1)

7.3 Part or identification number (PIN). The following part or identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor.

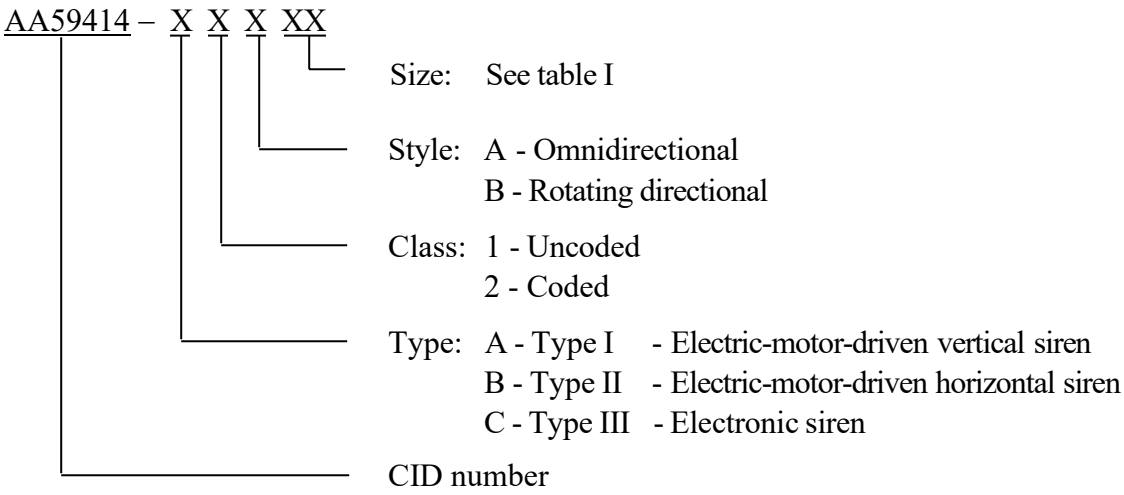

Changes from previous issue. The margins of this document are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

MILITARY INTERESTS:
Custodians:
Army - CR4
Navy – YD
Air Force – 71
DLA – GS

Reviewers:
Army – EA, MI
Navy – MC

CIVIL AGENCY COORDINATING ACTIVITY:
GSA – 7FXE

Preparing Activity:
Army – CR4

(Project No. 6350-2023-002)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:13Z
Check the source to verify that this is the current version before use.