INCH-POUND

A-A-59430
20 April 1999

COMMERCIAL ITEM DESCRIPTION

RIVETS, BLIND, NONSTRUCTURAL, RETAINED MANDREL, CLOSED-END, DOMED HEAD, ALUMINUM ALLOY

This General Services Administration has authorized the use of this Commercial Item Description for all Federal agencies.

1. SCOPE: This Commercial Item Description (CID) covers the requirements for pull-stem expandable blind rivets. These rivets are intended for rapid and permanent non-structural fastening applications in which access is available to one side only.

2. SALIENT CHARACTERISTICS:

2.1 Blind rivets furnished under this CID shall conform to the materials, strengths, and dimensions as specified in Table I, II, and III and as shown in Figure 1 below.

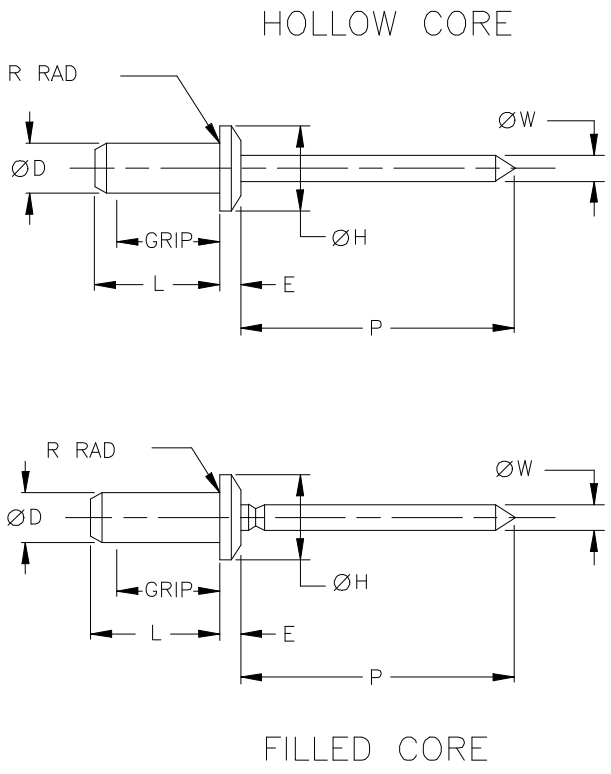

FIGURE 1. RIVETS

BENEFICIAL COMMENTS, RECOMMENDATIONS, ADDITIONS, DELETIONS, CLARIFICATIONS, ETC., AND DATA WHICH MAY IMPROVE THIS DOCUMENT SHOULD BE SENT TO: DEFENSE INDUSTRIAL SUPPLY CENTER, ATTN: DISC-AEEB, 700 ROBBINS AVENUE, PHILADELPHIA, PA 19111-5096.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

TABLE I. MATERIAL COMBINATION SYMBOLS AND STRENGTHS

SYMBOL	MATERIAL COMBINATION	RIVET DIA	MINIMUM SHEAR LOAD LBS	MINIMUM TENSION LOAD LBS
	HOLLOW CORE			
A	Body: 5056 Al Alloy (UNS A95056) Mandrel: 1012-1025 Steel (UNS G10120-G10250) 1045-1075 Steel (UNS G10450-G10750)	.125 .156 .188 .250	305 430 575 900	385 605 840 1100
C	Body: 1100 Al Alloy (UNS A91100) Mandrel: 2024 Al Alloy (UNS A92024)	.125 .156 .188	105 155 220	150 240 310
	FILLED CORE			
A	Body: 5056 Al Alloy (UNS A95056) Mandrel: 1012-1025 Steel (UNS G10120-G10250) 1045-1075 Steel (UNS G10450-G10750)	.125 .156 .188	480 590 890	280 480 840

TABLE II. BASIC DIMENSIONS

NOM DIA	BASIC DIMENSIONS						RECOMMENDED HOLE SIZE
	ØD	ØH	E REF	R MAX	ØW REF MAT'L CODE A	ØW REF MAT'L CODE C	
.125	.128 .124	.248 .224	.051 .031	.025	.064	.072	.129-.133
.156	.159 .154	.327 .297	.066 .046	.025	.086	.090	.160-.164
.188	.191 .186	.393 .357	.081 .061	.025	.104	.108	.192-.196
.250	.255 .249	.525 .475	.099 .079	.025	.144	-	.257-.261

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

TABLE III. DASH NUMBERS AND DIMENSIONS

MATERIAL COMBINATIONS					
HOLLOW CORE		FILLED CORE			
A	C	A	L	P MIN	RECOMMENDED GRIP RANGE
A401H		A401F	.222-.252		.032-.062
A402H	C402H	A402F	.286-.316		.063-.125
A403H	C403H	A403F	.347-.377	1.00	.126-.187
A404H	C404H		.410-.440		.188-.250
A405H			.472-.502		.251-.312
A406H			.535-.565		.313-.375
A502H		A502F	.300-.330		.063-.125
A503H		A503F	.362-.392	1.00	.126-.187
	C504H		.425-.455		.188-.250
A505H		A505F	.487-.517		.251-.312
A602H	C602H	A602F	.315-.345		.063-.125
A604H	C604H	A604F	.440-.470	1.00	.126-.250
A606H	C606H	A606F	.565-.595		.251-.375
A608H			.690-.720		.376-.500
A804H			.465-.505	1.00	.126-.250

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

2.2 Materials shall be of the type and grade specified in Table I.

2.3 Workmanship. Rivets shall be of uniform quality and free from injurious seams and other injurious defects.

2.4 Single shear load. The shear test shall be performed in accordance with Test Method 20 of NASM1312, or equivalent and shall conform to the data specified in Table I.

2.5 Tension load. The tension test shall be performed in accordance with Test Method 8 of NASM1312, or equivalent and shall conform to the data specified in Table I.

2.6 Packaging requirements The requirements for packaging shall be in accordance with ASTM D3951.

3. QUALITY ASSURANCE PROVISIONS.

3.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and the quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

4. NOTES

4.1 All dimensions are in inches.

4.2 The part number shall consist of the basic Commercial Item Description Number followed by a dash number from Table III. The dash number consists of a material combination symbol from Table I, a nominal body diameter size code in thirty-seconds of an inch from Table II, a maximum grip code in sixteenths of an inch from Table III, and a core style code from Table III.

EXAMPLE: AA59430 A 5 03 F

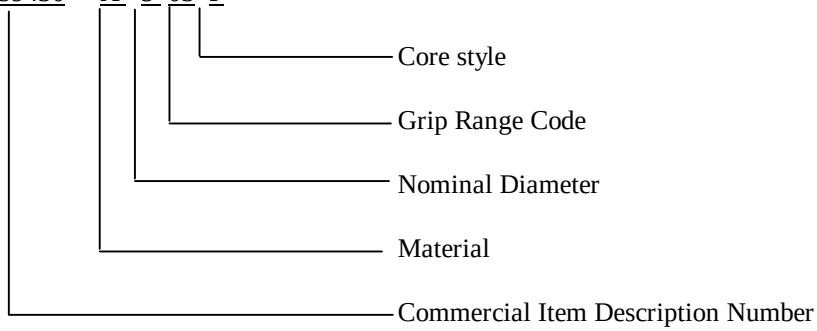

AA59430A503 Indicates -	Rivet, blind, nonstructural, retained mandrel, closed-end, domed head, 5056 (UNS A95056) aluminum alloy body, C1012-C1025 (UNS G10120-G10250) or C1045-C1075 (UNS G10450-G10750) steel mandrel; nominal body diameter size, .156; grip range, .126-.187,style; filled core.

Military Interests:

Custodians:
Army - AR
Navy - AS
Air Force - 99

Preparing Activity:
DLA-IS

Review Activities:
Army - AV, MI
Air Force - 11, 82
National Security Agency-NS

(Project No. 5320-0959)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3 and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6 and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, or to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** A-A-59430	**2. DOCUMENT DATE (YYMMDD)** 990420

3. DOCUMENT TITLE:
RIVETS, BLIND, NONSTRUCTURAL, RETAINED MANDREL, CLOSED-END, DOMED HEAD, ALUMINUM ALLOY

4. NATURE OF CHANGE

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	**b. ORGANIZATION**	
c. ADDRESS (Include Zip Code)	**d. TELEPHONE (Include Area Code)** **(1) Commercial** **(2) AUTOVON (If applicable)**	**7. DATE SUBMITTED (YYMMDD)**

8. PREPARING ACTIVITY DLA-IS

a. NAME Emelia Altomari	**b. TELEPHONE (Include Area Code)** (1) Commercial (215) 697-6827 (2) (DSN) 442-6827
c. ADDRESS (Include Zip Code) Defense Industrial Supply Center 700 Robbins Avenue Bldg. 3 (Code DISC-AESD) Philadelphia, PA 19111-5096	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403 Falls Church, VA 22041 TELEPHONE (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.