
DETAIL SPECIFICATION SHEET

CONNECTOR, MALE RECEPTACLE ELECTRICAL, RECTANGLAR, POLARIZED SHELL, MINIATURE TYPE, PIN CONTACTS, PRESSURIZED (STYLE 023A)

This specification is approved for use by all Departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-21617.

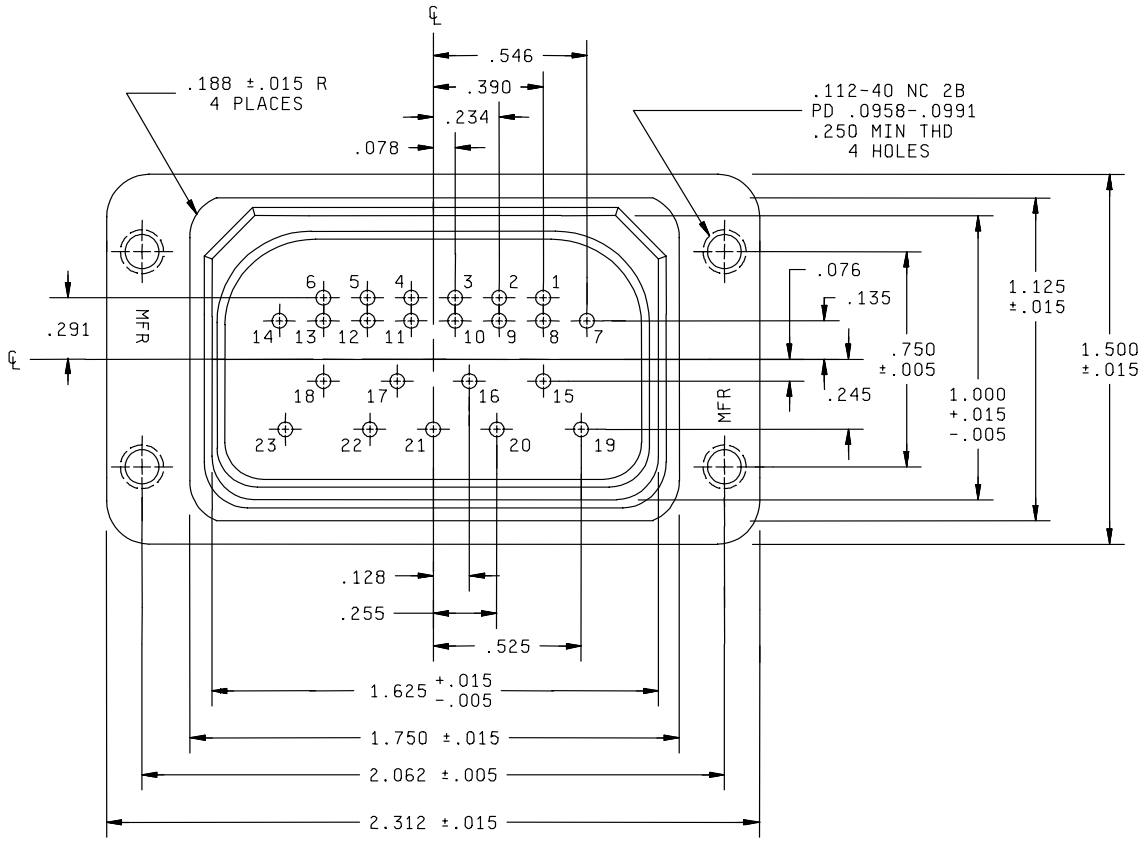

23 SIZE 20 CONTACTS

FIGURE 1. Type JS, class M inserts containing pin contacts.

DISTRIBUTION STATEMENT A. Approved for public release; distribution if unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:07Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.005	0.13	.135	3.43	.546	13.87
.015	0.38	.188	4.78	.750	19.05
.076	1.93	.234	5.94	1.000	25.40
.078	1.98	.245	6.22	1.125	28.58
.0958	2.433	.250	6.35	1.500	38.10
.0991	2.517	.255	6.48	1.625	41.28
.112	2.84	.291	7.39	1.750	44.45
.128	3.25	.390	9.91	2.062	52.37
		.525	13.34	2.312	58.72

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).

FIGURE 1. Type JS, class M inserts containing pin contacts - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:07Z
Check the source to verify that this is the current version before use.

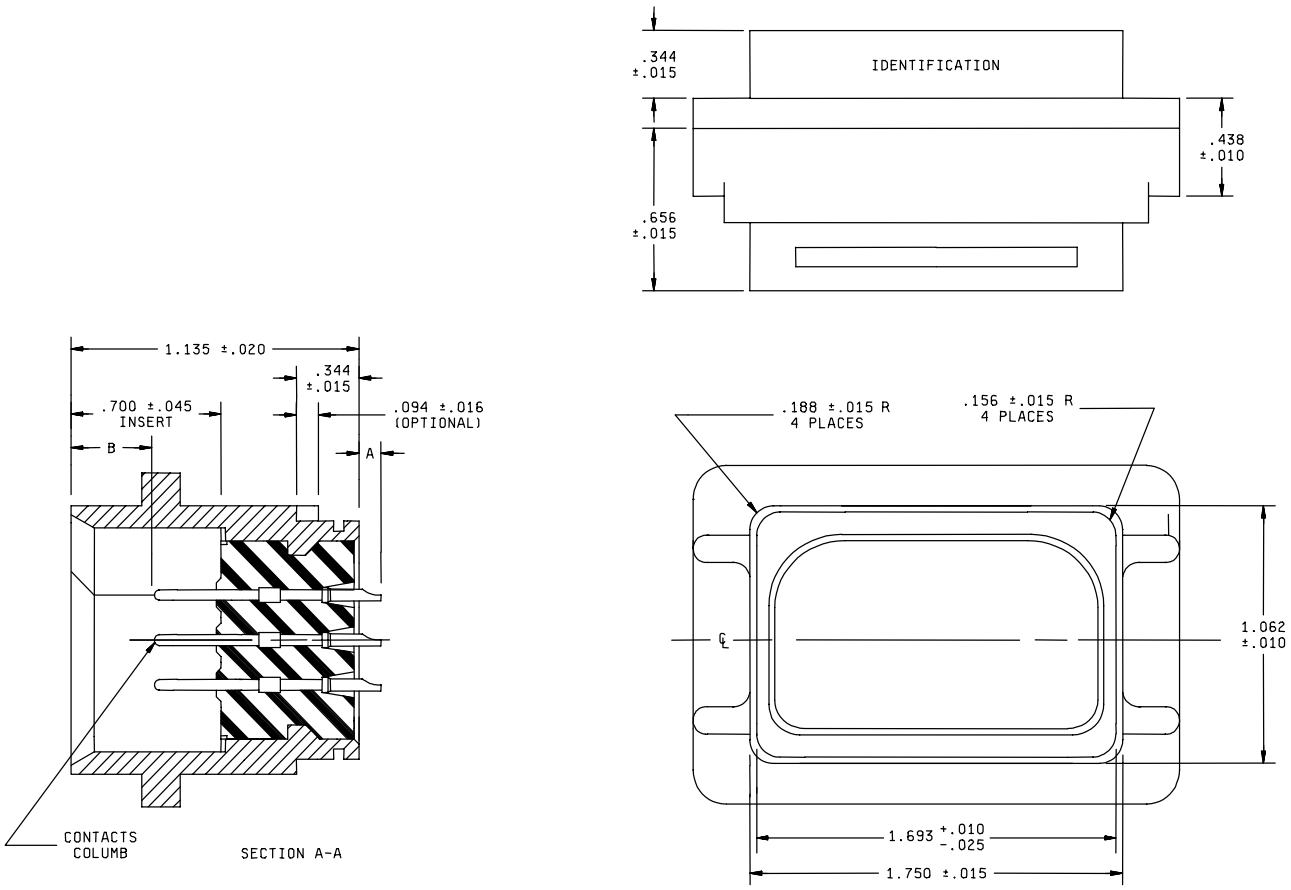

Contact size	20
A dimension (mm)	.400 ±.045 (10.16 ±1.14)

Inches	mm	Inches	mm	Inches	mm
.010	0.25	.045	1.14	.656	16.66
.015	0.38	.094	2.39	.700	17.78
.016	0.41	.156	3.96	1.062	26.97
.020	0.51	.188	4.78	1.135	28.83
.025	0.64	.344	8.74	1.693	43.00
		.438	11.13	1.750	44.45

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).

FIGURE 2. Type JS, class M large flange male receptacles.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figures 1 and 2.

Reference material: See MIL-DTL-21617.

Service rating: Contacts 1 through 14 service rating A, contacts 15 through 23 service rating D, (see MIL-DTL-21617).

Mating connector: See MIL-DTL-21617/13.

Contacts: Contacts shall be in accordance with MIL-DTL-21617.

Part or Identifying Number (PIN): PIN example as follows:

M21617/15	JS	M	023A
Specification	Type	Class	Style

Type: JS - Receptacle, pressurized type.
Class: M - Male, inserts containing pin contacts.
Style: 023A - Contacts 23 size 20.

Supersession data: Old PIN JSM023A.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy - EC
DLA – CC

Preparing activity:
DLA - CC

(Project 5935-4335-015)

Review activities:
Army - AV, MI

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:07Z
Check the source to verify that this is the current version before use.