
DETAIL SPECIFICATION SHEET

CONNECTOR, FEMALE PLUG ELECTRICAL, RECTANGLAR,
POLARIZED SHELL, MINIATURE TYPE, SOCKET CONTACTS
(STYLE 040A)

This specification is approved for use by all Departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-21617.

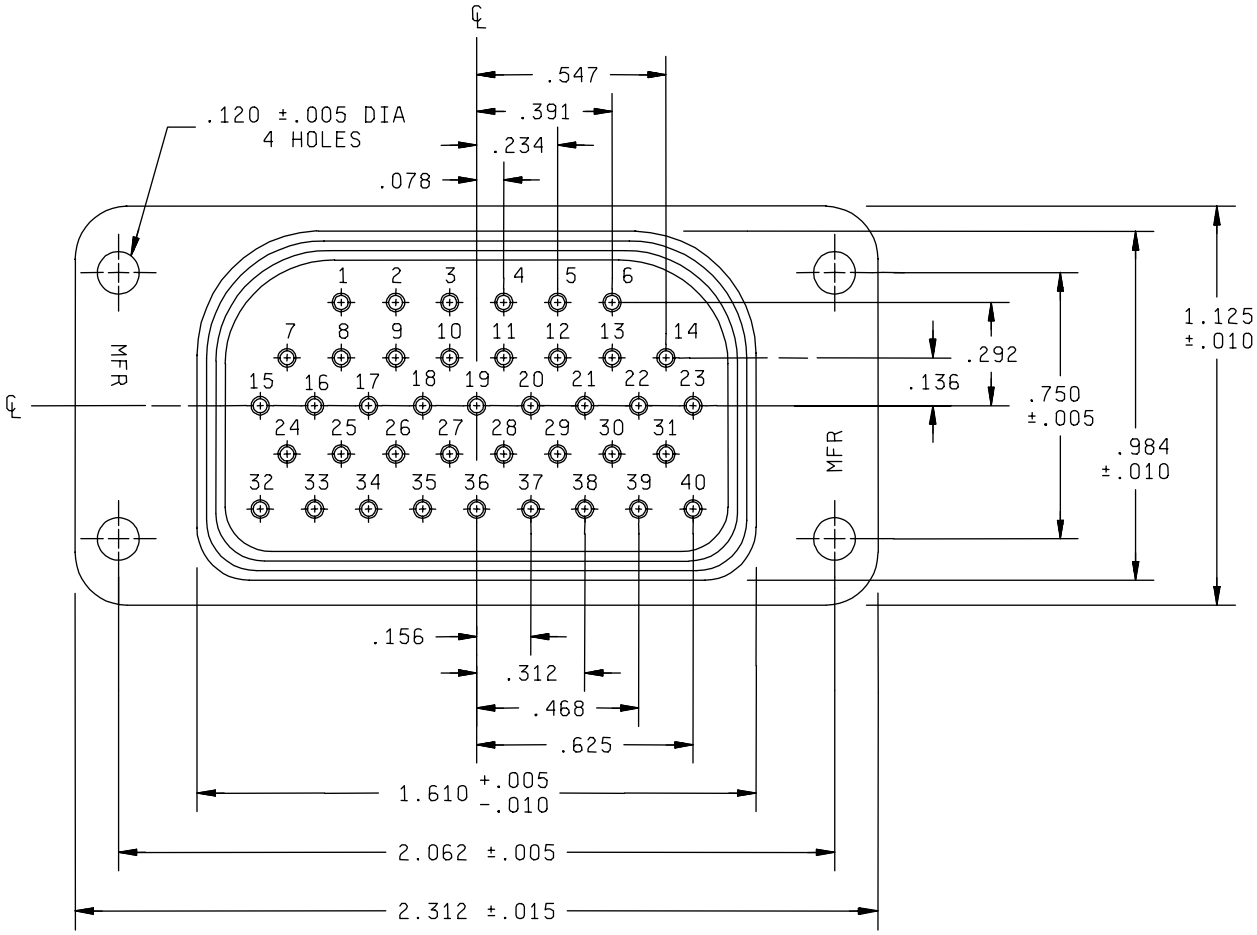

CONTACTS 40 SIZE 20

FIGURE 1. Type P, class F inserts containing socket contacts.

DISTRIBUTION STATEMENT A. Approved for public release; distribution if unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:08Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.136	3.45	.391	9.93	.984	25.00
.010	0.25	.156	3.96	.468	11.89	1.125	28.58
.015	0.38	.234	5.94	.547	13.89	1.610	40.89
.078	1.98	.292	7.42	.625	15.88	2.062	52.37
.120	3.05	.312	7.92	.750	19.05	2.312	58.72

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).

FIGURE 1. Type P, class F inserts containing socket contacts - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:08Z
Check the source to verify that this is the current version before use.

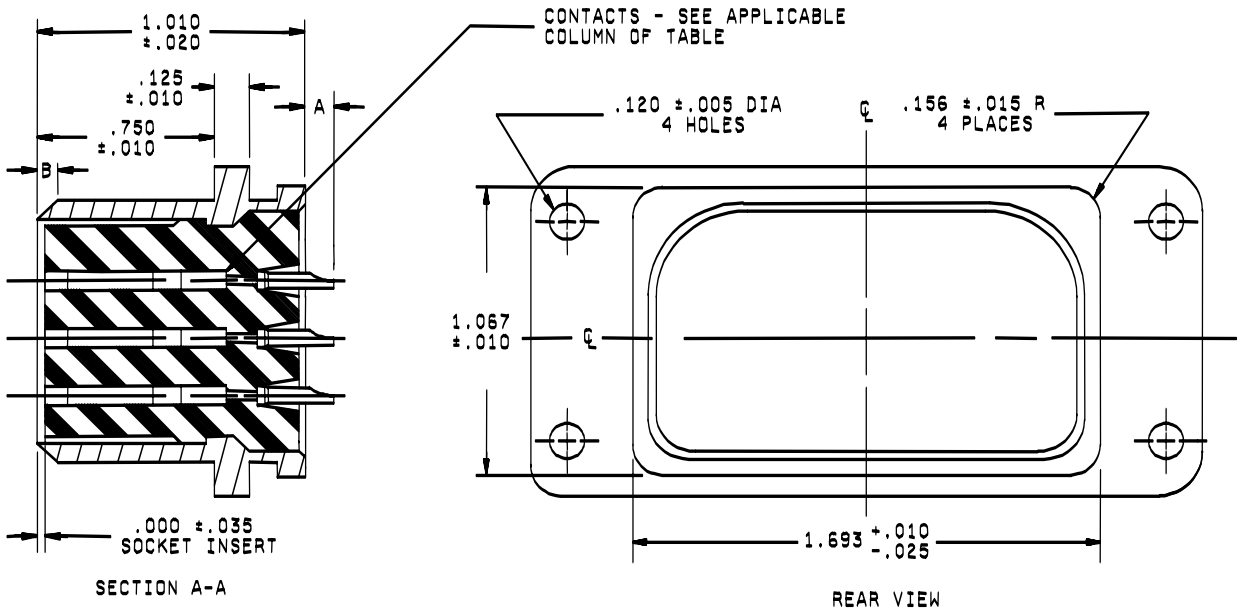

Dimension	Contact size
	20 (mm)
A (mm)	.400 ±.025 (10.16 ±0.65)
B (mm)	057 ±.025 (1.45 ±0.63)

Inches	mm	Inches	mm
.005	0.13	.120	3.05
.010	0.25	.125	3.18
.015	0.38	.156	3.96
.020	0.51	.750	19.06
.025	0.64	1.010	25.65
.035	0.89	1.067	27.10
		1.693	43.00

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).

FIGURE 2. Type P, class F large flange female receptacles.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:08Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figures 1 and 2.


Reference material: See MIL-DTL-21617.

Service rating: A (see MIL-DTL-21617).

Mating connector: See MIL-DTL-21617/23 and /24.

Contacts: Contacts shall be in accordance with MIL-DTL-21617.

Part or Identifying Number (PIN): PIN example as follows:

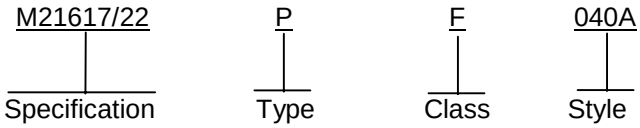

Type: P – Plug.
Class: F - Female, insert containing socket contacts.
Style: 040A - Contacts 40 size 20.

Supersession data: Old PIN PF040A.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy - EC
DLA – CC

Preparing activity:
DLA - CC

(Project 5935-4335-022)

Review activities:
Army - AV, MI

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:08Z
Check the source to verify that this is the current version before use.