
DETAIL SPECIFICATION SHEET

CONNECTOR, MALE RECEPTACLE ELECTRICAL, RECTANGLAR,
POLARIZED SHELL, MINIATURE TYPE, PIN CONTACTS,
PRESSURIZED (STYLE 040A)

This specification is approved for use by all Departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-21617.

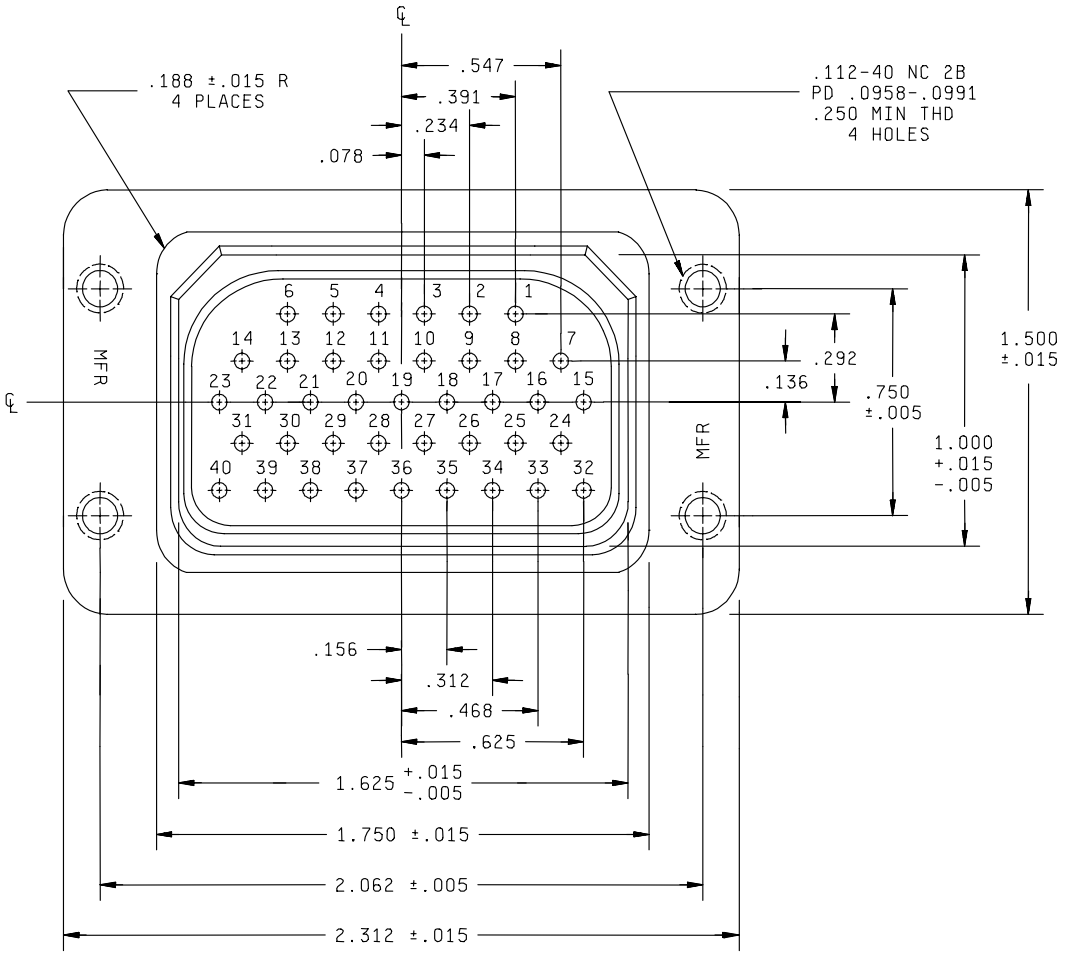

CONTACTS 40 SIZE 20

FIGURE 1. Type JS, class M inserts containing pin contacts.

DISTRIBUTION STATEMENT A. Approved for public release; distribution if unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:09Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.136	3.45	.312	7.92	1.000	25.40
.015	0.38	.156	3.96	.391	9.93	1.500	38.10
.078	1.98	.188	4.78	.468	11.89	1.625	41.28
.0958	2.433	.234	5.94	.547	13.89	1.750	44.45
.0991	2.517	.250	6.35	.625	15.88	2.062	52.37
.112	2.84	.292	7.42	.750	19.05	2.312	58.72

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).

FIGURE 1. Type JS, class M inserts containing pin contacts - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:09Z
Check the source to verify that this is the current version before use.

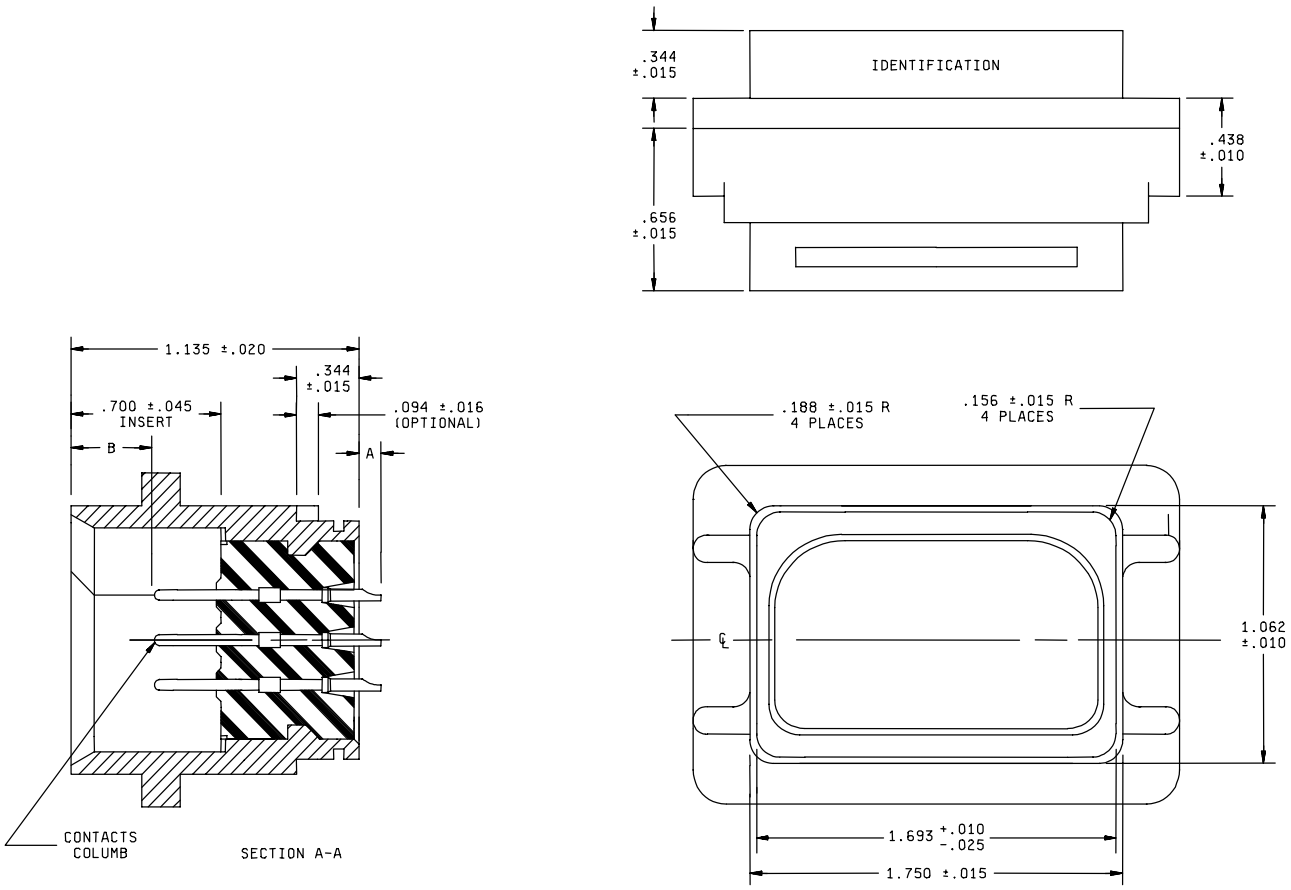

Dimension	Contact size 20 (mm)
A (mm)	.400 ±.025 (10.16 ±0.65)
B (mm)	057 ±.025 (1.45 ±0.63)

Inches	mm	Inches	mm	Inches	mm
.010	0.25	.045	1.14	.438	11.13
.015	0.38	.052	1.32	.656	16.66
.016	0.41	.094	2.39	.700	17.78
.020	0.51	.156	3.96	1.062	26.97
.025	0.64	.188	4.78	1.135	28.83
		.344	8.74	1.693	43.00
				1.750	44.45

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).

FIGURE 2. Type JS, class M large flange male receptacles.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figures 1 and 2.


Reference material: See MIL-DTL-21617.

Service rating: A (see MIL-DTL-21617).

Mating connector: See MIL-DTL-21617/22.

Contacts: Contacts shall be in accordance with MIL-DTL-21617.

Part or Identifying Number (PIN): PIN example as follows:

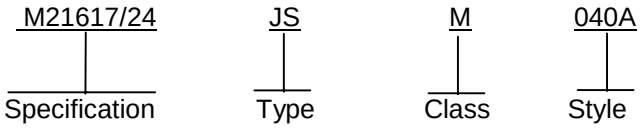

Type: JS - Receptacle, pressurized type.
Class: M - Male, inserts containing pin contacts.
Style: 040A - Contacts 40 size 20.

Supersession data: Old PIN JSM040A.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy - EC
DLA – CC

Review activities:
Army - AV, MI

Preparing activity:
DLA - CC

(Project 5935-4335-024)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:09Z
Check the source to verify that this is the current version before use.