INCH-POUND


MIL-DTL-21617/28
w/AMENDMENT 1
14 September 2026
SUPERSEDING
MIL-DTL-21617/28
24 July 2003

DETAIL SPECIFICATION SHEET

CONNECTOR, MALE RECEPTACLE ELECTRICAL, RECTANGLAR, POLARIZED SHELL, MINIATURE TYPE, MIXED PIN CONTACTS (STYLE 016C)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-21617.

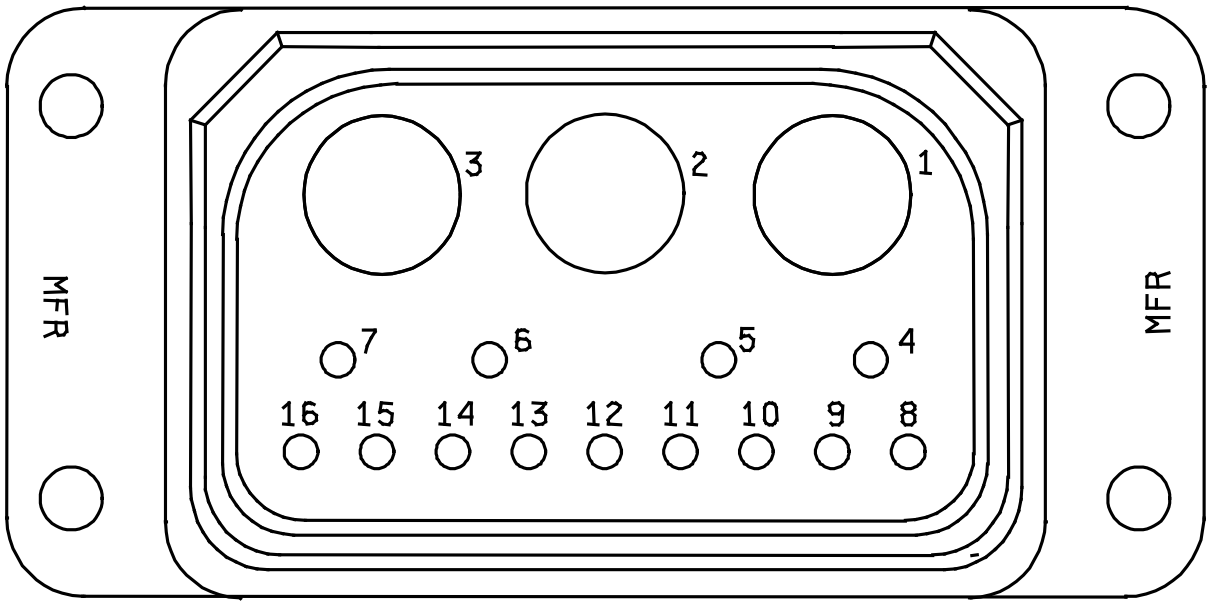


CONTACTS
3 SIZE 8 COAXIAL
13 SIZE 20

FIGURE 1. Type P, class F inserts containing mixed pin contacts.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution if unlimited

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:09Z
Check the source to verify that this is the current version before use.

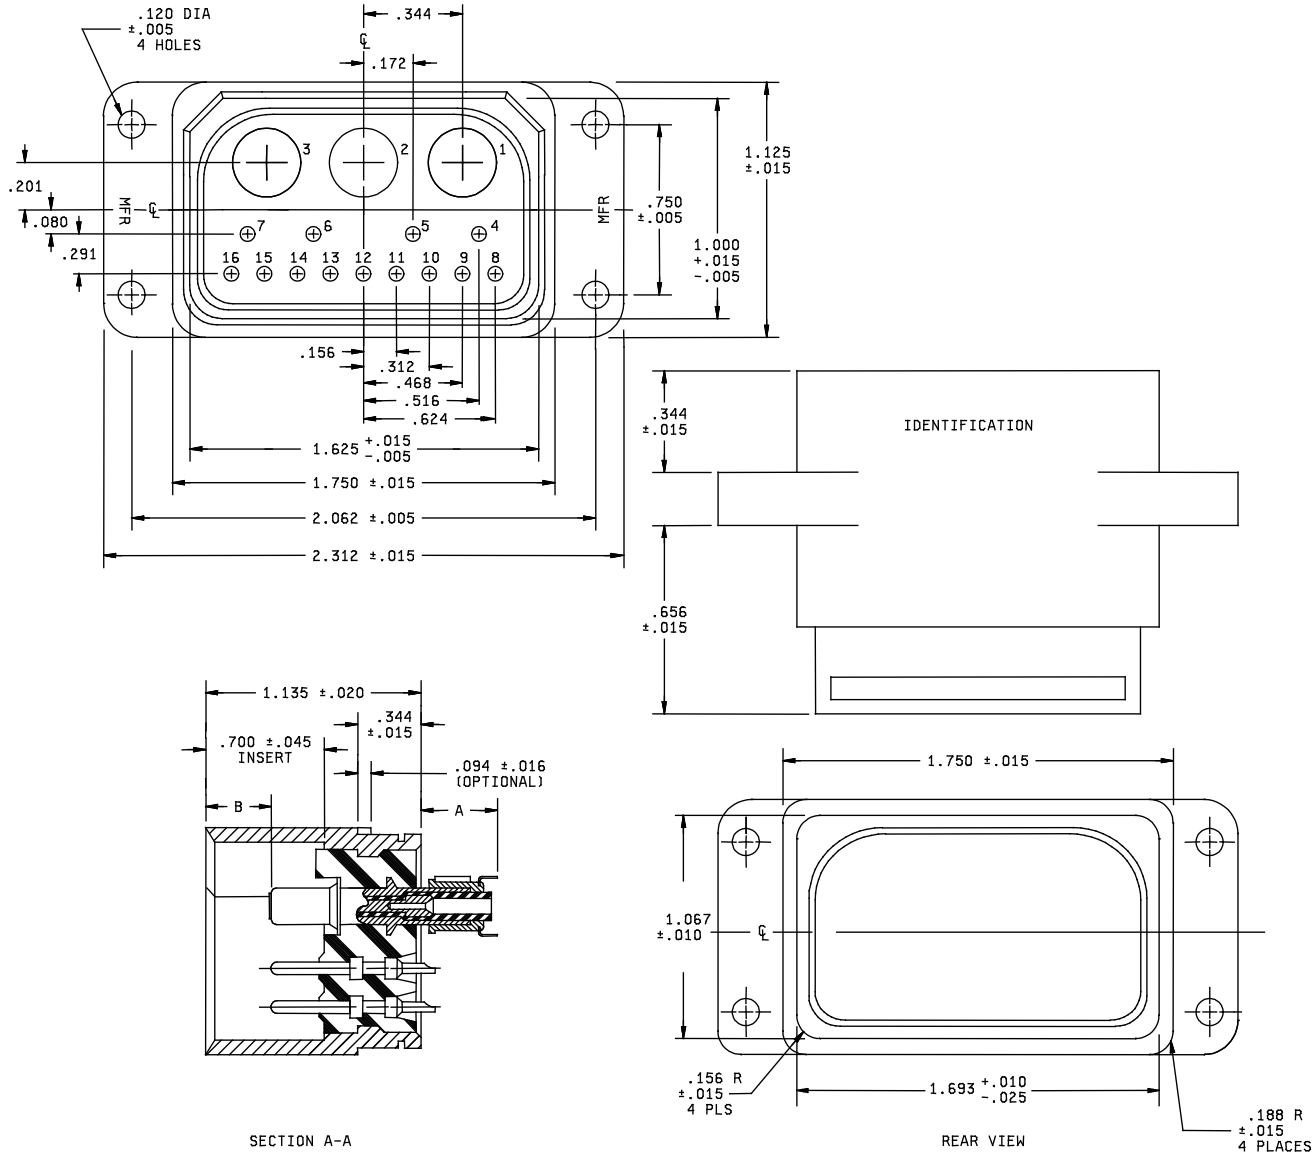

Style	Size	Location	Quantity	Solder well		Dimensions	
				Diameter	Depth	A	B
016C	Coax size 8	1, 2, 3	4	.046 ±.005	.210 +.040 -.025	.230 ±0.45	.070 ±.035
	20	4 through 16	13	----	----	.480 ±.045	.070 ±.035

FIGURE 1. Type P, class F inserts containing mixed pin contacts - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:09Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.005.
3. Contact numbers 1 through 3 shall use size 8 coaxial contacts. All others shall use size 20 contacts.

FIGURE 1. Type P, class F inserts containing mixed pin contacts - Continued.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Reference material: See MIL-DTL-21617.


Service rating: Contacts 1, 2, and 3 service rating D, all other shall have service rating A, (see MIL-DTL-21617).

Mating connector: See MIL-DTL-21617/23 and /27.

Contacts: Shall be in accordance with MIL-DTL-83733 for new design, except as specified herein.

Coaxial contact plating: Contact plating shall be in accordance with MIL-DTL-21617.

Part or Identifying Number (PIN): PIN example as follows:

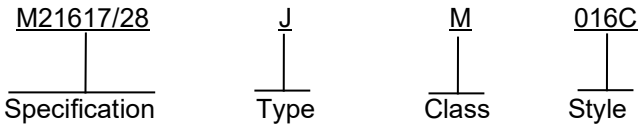

Type: J - Receptacle.
Class: M - Male, inserts containing pin contacts.
Style: 016C - Contacts 3 size 8 coaxial, and 13 size 20 contacts.

Supersession data: Old PIN JM016C.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy - EC
DLA – CC

Preparing activity:
DLA - CC

(Project 5935-2026-045)

Review activities:
Army - AV, MI

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:09Z
Check the source to verify that this is the current version before use.