DETAIL SPECIFICATION SHEET

CONNECTOR, FEMALE PLUG ELECTRICAL, RECTANGLAR, POLARIZED SHELL, MINIATURE TYPE, SOCKET CONTACTS (STYLE 008A)

This specification is approved for use by all Departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-21617.

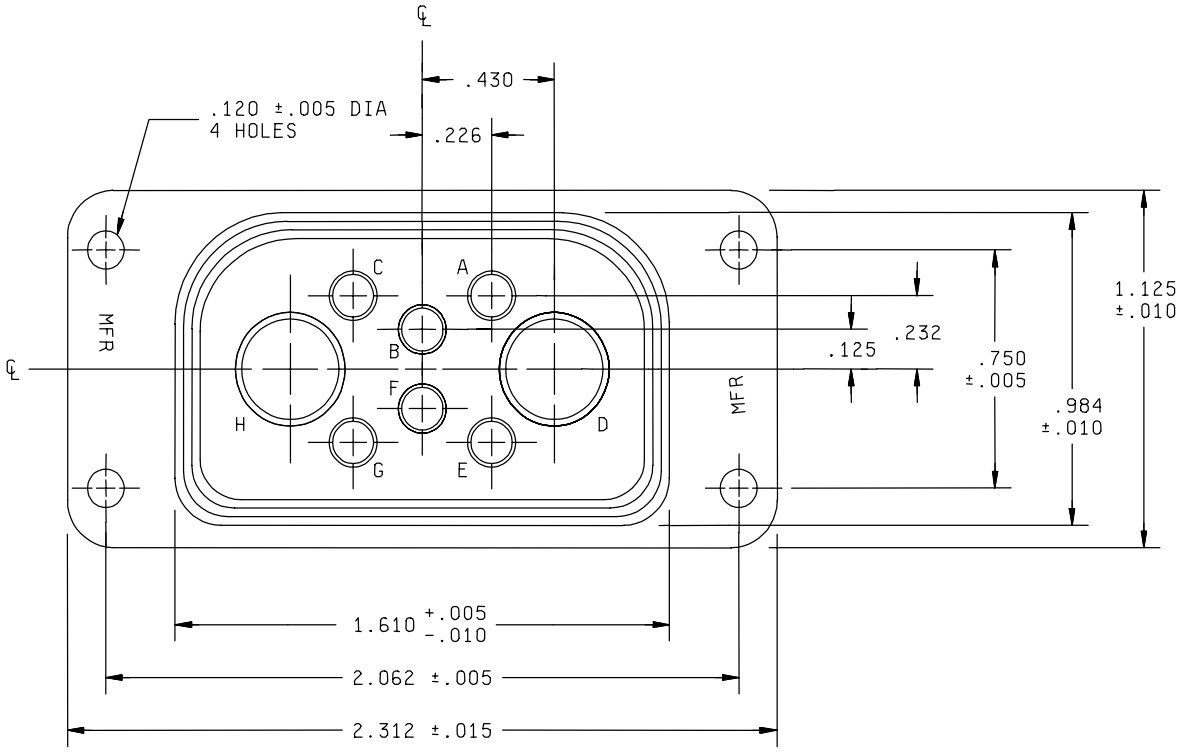

2 SIZE 8 CONTACTS
6 SIZE 16 CONTACTS

FIGURE 1. Type P, class F inserts containing socket contacts.

DISTRIBUTION STATEMENT A. Approved for public release; distribution if unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:06Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.005	0.13	.430	10.92
.010	0.25	.750	19.05
.015	0.38	.984	24.99
.120	3.05	1.125	28.58
.125	3.18	1.610	40.89
.226	5.74	2.062	52.37
.232	5.89	2.312	58.73

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).

FIGURE 1. Type P, class F inserts containing socket contacts - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:06Z
Check the source to verify that this is the current version before use.

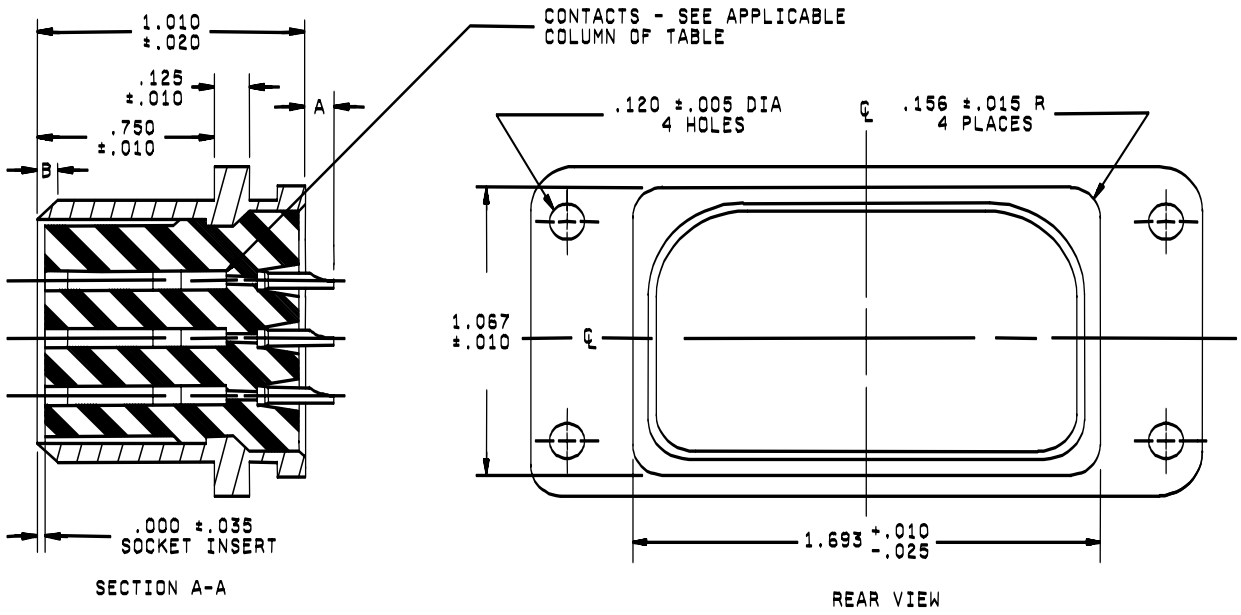

Dimension	Contact size	
	8 (mm)	16 (mm)
A (mm)	.312 ±.045 (7.92 ± 1.14)	.156 ±.045 (3.96 ± 1.14)
B (mm)	057 ±.025 (1.45 ±0.63)	

Inches	mm	Inches	mm
.005	0.13	.120	3.05
.010	0.25	.125	3.18
.015	0.38	.156	3.96
.020	0.51	.750	19.06
.025	0.64	1.010	25.65
.035	0.89	1.067	27.10
		1.693	43.00

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).

FIGURE 2. Type P, class F large flange female receptacle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:06Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figures 1 and 2.

Reference material: See MIL-DTL-21617.

Service rating: Contacts D and H service rating D, all others service rating A, (see MIL-DTL-21617).

Test gage details: For size 16 contacts see MIL-DTL-21617 appendix.

Mating connector: See MIL-DTL-21617/5 and /6.

Contacts: Contacts shall be in accordance with MIL-DTL-21617.

Part or Identifying Number (PIN): PIN example as follows:

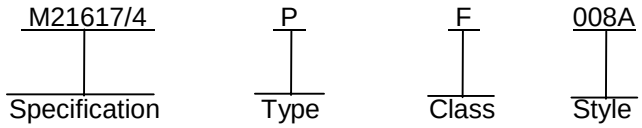

Type: P - Plug
Class: F - Female, insert containing socket contacts.
Style: 008A - Contacts, 2 size 8, 2 size 4.

Supersession data: Old PIN PF008A.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy - EC
DLA – CC

Preparing activity:
DLA - CC

(Project 5935-4335-004)

Review activities:
Army - AV, MI

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:06Z
Check the source to verify that this is the current version before use.