
NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy departments as the Air Force-Navy standard for this product. This drawing supersedes all immediate standard drawings for the same product and shall become effective for the procurement of commercial supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

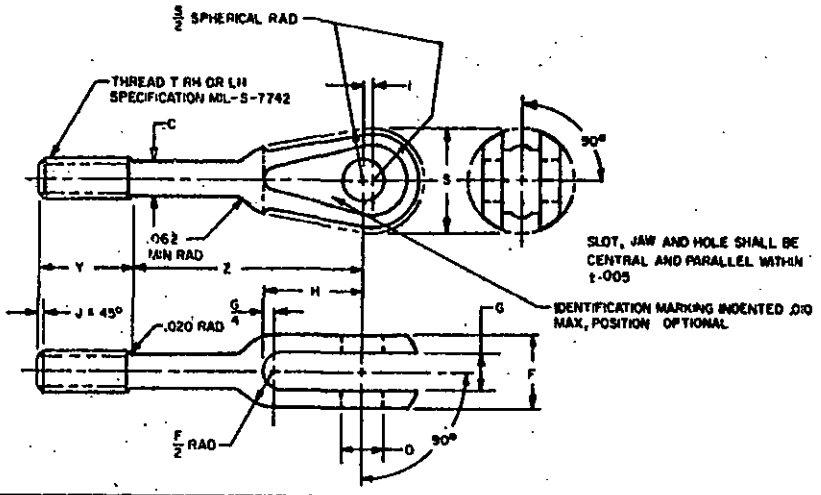

(b) AN PART NO	MIN BREAKING STRENGTH LB	THREAD T UNF-3A (a)	C +.006 -.000 DIA	D +.002 -.000 DIA	F +.010 -.005	G +.010 -.000	H	I +.010 -.000	J MAX	S SPHER DIA	Y ±.047	Z +.031 -.015
AN161-5LS AN161-5RS	550	(a) NO. 4-48	.078	.164	.312	.150	.375	.031	.031	.375	.344	.719
AN161-8LS AN161-8RS	800	(a) NO. 6-40	.094	.190	.25	.109	.375	.031		.375	.375	1.125
AN161-16LS AN161-16RS AN161-16LL AN161-16RL	1 600	(a) NO. 10-32	.133	.190	.319	.156	.375	.031		.500	.500	1.125 2.000
AN161-22LS AN161-22RS AN161-22LL AN161-22RL	2 200	1/4-28	.155	.190	.350	.187	.469	.031		.531	.563	1.156 2.031
AN161-32LS AN161-32RS AN161-32LL AN161-32RL	3 200	1/4-28	.189	.250	.452	.218	.531	.047		.641	.625	1.219 2.109
AN161-46LS AN161-46RS AN161-46LL AN161-46RL	4 600	5/16-24	.243	.313	.547	.250	.656	.047		.734	.750	1.281 2.156
AN161-6LL AN161-6RL	6 100	3/8-24	.256	.375	.630	.270	.843	.063		.813	.875	2.281
AN161-8OLL AN161-8ORL	8 000	3/8-24	.306	.375	.687	.312	.875	.063	.047	.922	.875	2.313
AN161-12SLL AN161-12SRL	12 500	7/16-20	.362	.438	.750	.375	1.000	.078		1.094	1.000	2.438
AN161-17SLL AN161-17SRL	17 500	1/2-20	.425	.500	.844	.437	1.188	.078		1.219	1.000	2.688

⑨ CANCELLED AFTER 10 DECEMBER 1971 USE MS21252.

~~INTERCHANGEABILITY RELATIONSHIP. MS21252 CAN REPLACE THE CANCELLED AN161 PARTS IDENTIFIED BY THE SAME DASH NUMBER. THE CANCELLED AN161 PARTS CANNOT REPLACE THE MS21252 PARTS AND SHOULD BE USED UNTIL EXISTING STOCK IS DEPLETED. USE ONLY THE SUPERSEDING MS21252 PARTS IDENTIFIED BY THE SAME DASH NUMBER.~~

(a) UNF-3A THREAD FOR ALL EXCEPT NOS. 4-48, 6-40 and 10-32 WHICH ARE NF-3A.

(b) FIRST LETTER FOLLOWING DASH NO. INDICATES DIRECTION OF THREAD (LEFT OR RIGHT)

MATERIAL: STEEL. SEE PROCUREMENT SPECIFICATION.

FINISH: SEE PROCUREMENT SPECIFICATION.

EXAMPLES OF PART NOS: AN161-5LS = FORK TURNBUCKLE, NO. 4-48 LEFT HAND THREAD SHORT.
AN161-46RL = FORK TURNBUCKLE, 5/16-24 RIGHT HAND THREAD LONG.

REMOVE ALL LOOSE AND HANGING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°

⑨ ~~REINSTATED 8 SEPTEMBER 1970~~

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN161
MIL-T-5685	FORK - TURNBUCKLE	

SUPERSEDES AAF DRAWINGS 161 4382342 AND 049321.

APPROVED 22 Oct 42 REVISED (1) 13 Jan 43 (2) 15 May 44 (3) 11 Jul 45 (4) 24 May 51 (5) 15 Sep 52 (6) 17 Nov 53 (7) 25 Nov 63 (8) 8 Sep 70 (9) 10 Dec 71

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:14Z
Check the source to verify that this is the current version before use.