NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all association standard drawings for the same product and shall become effective for the procurement of commercial supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

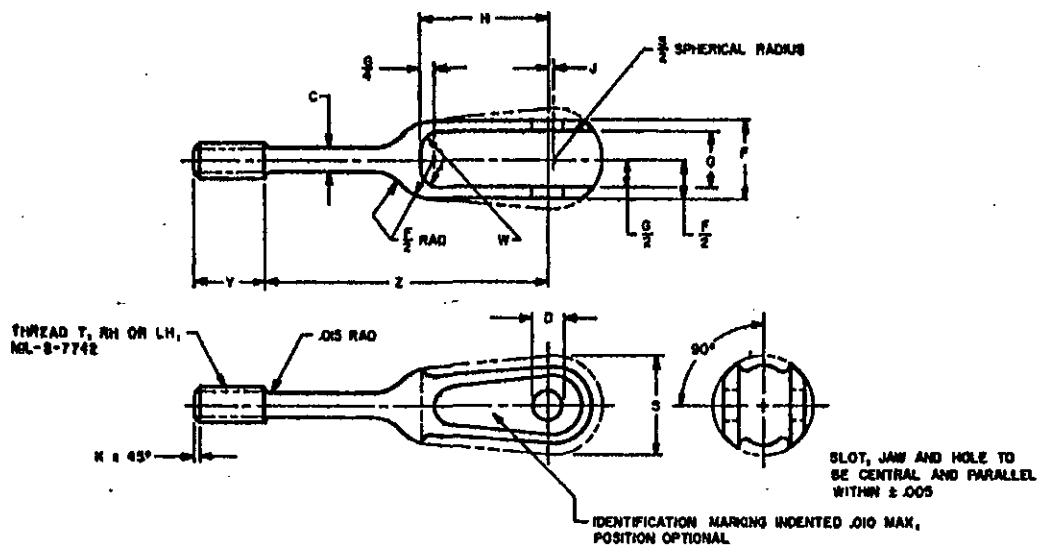

(a) AN PART NO.	MATCHES BEARING NO.	MINIMUM BREAKING STRENGTH LB	THREAD T NF-3	C +.000 −.006 DIA	D +.002 −.000 DIA	F +.010 −.005	G ±.005	H	J +.010 −.000	K MAX	S SPHER DIA	W RAD	Y ±.047	Z +.010 −.015
AN162-3LS	AN200KP3	1600	NO. 10-32	.139	.190	.500	.312	1.062	.031	.031	.750	5/32	.500	1.812
AN162-3RS														1.812
AN162-3LL														2.687
AN162-3RL														2.687
AN162-4LS	AN200KP4	3600	1/4-28	.195	.250	.750	.500	1.188	.047		.875	3/16	.625	1.937
AN162-4RS														1.937
AN162-4LL														2.812
AN162-4RL														2.812
AN162-5LS	AN200KP4	4600	5/16-24	.249	.250	.750	.500	1.188	.047	.047	.875	3/16	.750	1.937
AN162-5RS														1.937
AN162-5LL														2.812
AN162-5RL														2.812
AN162-6LS	AN200KP5	4600	5/16-24	.249	.313	.813	.562	1.313	.047		1.000	3/16	.750	2.000
AN162-6RS														2.000
AN162-6LL														2.875
AN162-6RL														2.875

(a) FIRST LETTER FOLLOWING DASH NUMBER INDICATES DIRECTION OF THREAD (RIGHT OR LEFT).

MATERIAL: SEE PROCUREMENT SPECIFICATION.

FINISH: SEE PROCUREMENT SPECIFICATION.

EXAMPLES OF PART NOS.: AN162-3LS = FORK-TURNBUCKLE, NO. 10-32 LEFT HAND THREAD, SHORT.
AN162-3RL = FORK-TURNBUCKLE, 1/4-28 RIGHT HAND THREAD, LONG.

REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ± 1/2°.

⑥ CANCELLED AFTER 10 DECEMBER 1971. USE MS21253.
~~INTERCHANGEABILITY RELATIONSHIP: MS21253 CAN REPLACE THE CANCELLED AN162 PARTS IDENTIFIED BY THE SAME DASH NUMBER. THE CANCELLED AN162 PARTS CANNOT REPLACE THE MS21253 PARTS AND SHOULD BE USED UNTIL EXISTING STOCK IS DEPLETED. USE ONLY THE SUPERSEDING MS21253 PARTS IDENTIFIED BY THE SAME DASH NUMBER.~~

⑤ ~~REINSTATED 8 SEPTEMBER 1970~~

REVISED ① 24 May 54 ② 17 Nov 58 ③ 25 Nov 63 ④ 8 Sep 70 ⑤ 10 Dec 71

APPROVED

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN162
MIL-T-5685	FORK-TURNBUCKLE, FOR BEARING	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:14Z
Check the source to verify that this is the current version before use.