
NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all associated standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

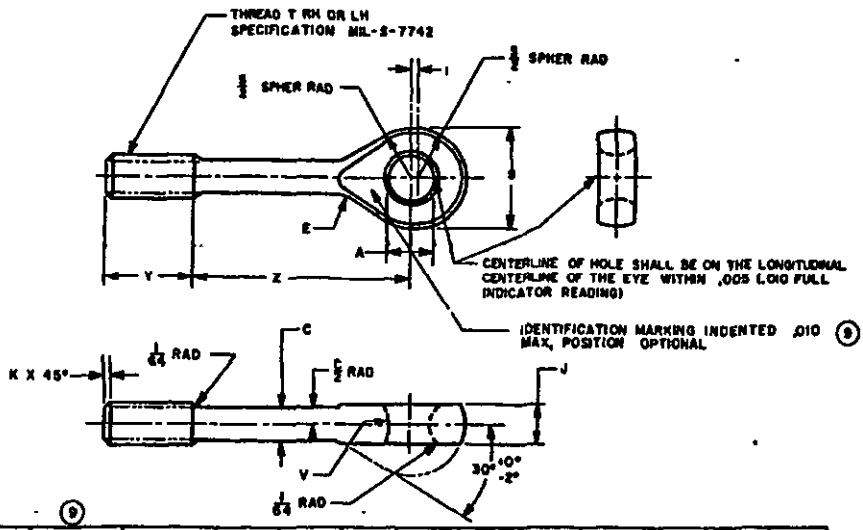

(9)

AN PART NO.	MIN BREAKING STRENGTH LB	THREAD T UNF-3A (a)	A +.010 -.000 DIA	C +.008 -.000 DIA	E RAD	I +.010 -.000	J ±.005	K MAX	S DIA	V RAD	Y ±.047	Z +.031 -.015
AN170-5LS	550	(a) NO. 4-48	.172	.078	.094	.031	.125	.031	.344	.094	.344	.469
AN170-5RS												
AN170-6LS	800	(a) NO. 6-40	.188	.094	.125	.031	.125		.375	.094	.375	1.125
AN170-6RS												
AN170-10LS	1 600	(a) NO. 10-32	.219	.133	.156	.031	.188		.500	.172	.500	1.125
AN170-10RS												
AN170-10LL												2.000
AN170-10RL												
AN170-22LS	2 200	1/4 -28	.218	.155	.156	.031	.188		.500	.172	.563	1.125
AN170-22RS												
AN170-22LL												2.000
AN170-22RL												
AN170-32LS	3 200	1/4 -28	.281	.189	.219	.047	.218		.625	.203	.625	1.125
AN170-32RS												
AN170-32LL												2.000
AN170-32RL												
AN170-46LS	4 600	5/16-24	.313	.243	.250	.047	.281	.047	.688	.250	.750	1.125
AN170-46RS												
AN170-46LL												2.000
AN170-46RL												
AN170-6LL	6 100	3/8 -24	.344	.256	.281	.063	.281		.750	.313	.875	2.000
AN170-6IRL												
AN170-8OLL	8 000	3/8 -24	.375	.306	.281	.063	.328		.875	.375	.875	2.000
AN170-8ORL												
AN170-12SLL	12 500	7/16 -20	.469	.362	.359	.078	.375		1.063	.453	1.000	2.375
AN170-12SRL												
AN170-17SLL	17 500	1/2 -20	.563	.425	.406	.078	.469		1.188	.500	1.000	2.625
AN170-17SRL												

(9) ~~CANCELLED AFTER 25 NOVEMBER 1963 USE MS21255.~~
~~INTERCHANGEABILITY RELATIONSHIP: MS21255 CAN REPLACE THE CANCELLED AN170 PARTS IDENTIFIED BY LINE MATERIAL AND THREAD SIZE. THE CANCELLED AN170 PARTS CANNOT REPLACE THE MS21255 PARTS AND SHOULD BE USED UNTIL EXISTING STOCK IS DEPLETED. USE ONLY THE SUPERSEDING MS21255 PARTS OF LIKE MATERIAL AND THREAD SIZE.~~

(a) UNF-3A THREAD FOR ALL EXCEPT NOS. 4-48, 6-40 AND 10-32 WHICH ARE NF-3A.
MATERIAL: STEEL. SEE PROCUREMENT SPECIFICATION.
FINISH: SEE PROCUREMENT SPECIFICATION.
FIRST LETTER FOLLOWING DASH NUMBER INDICATES DIRECTION OF THREAD (LEFT OR RIGHT HAND)
EXAMPLES OF PART NOS.: AN170-5LS = EYE - TURNBUCKLE, NO 4-48 LEFT HAND THREAD, SHORT,
AN170-46RL = EYE - TURNBUCKLE, 5/16-24 RIGHT HAND THREAD, LONG.
REMOVE ALL LOOSE AND HANGING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, FRACTION ± 1/64.

(9) REINSTATED 8 SEPTEMBER 1970

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	ANI70
MIL-T-5685	EYE—AIRCRAFT TURNBUCKLE, FOR CABLE	

SUPERSEDES FORMER AIR FORCE AND NAVY STANDARD ISSUES OF AN170, USAF DRAWING 037995 AND 037996, NAF DRAWINGS 1084-3 AND AND1084-4.

(1) APPROVED 1 SEP 42 (2) REVISED 15 APR 44 (3) 22 MAY 44 (4) 12 JUL 44 (5) 20 SEP 44 (6) 9 NOV 48 (7) 24 MAY 51 (8) 15 SEP 52 (9) 25 NOV 63 (9) 8 SEP 70

Source: https://assist.dla.mil -- Downloaded: 202640-26T14:14Z
Check the source to verify that this is the current version before use.