FSC 5310

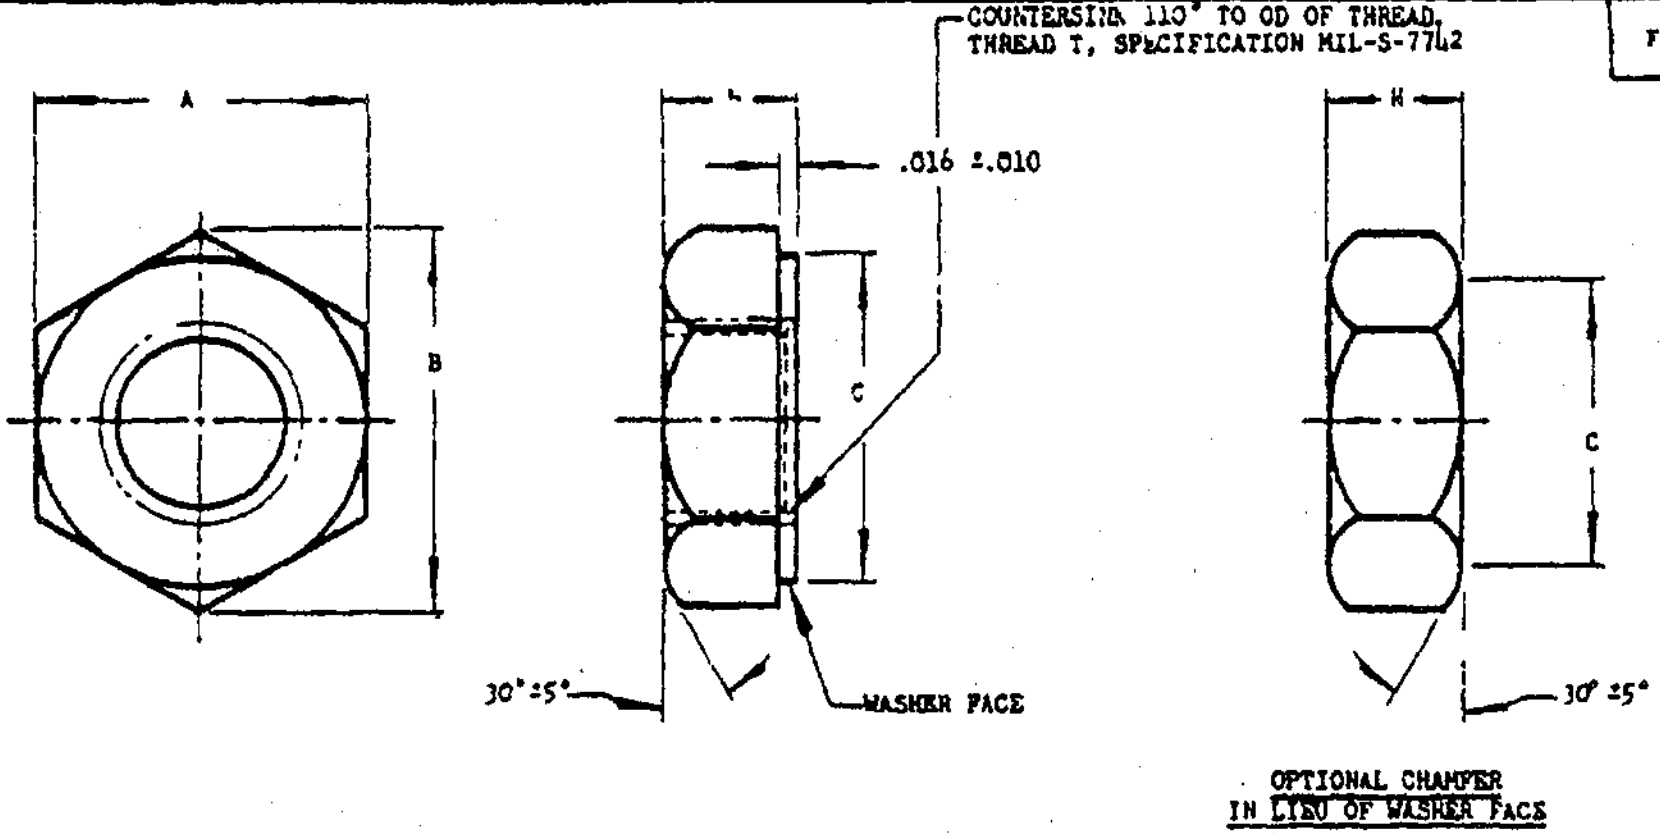
A
B
C
H
.016 ±.010
COUNTERSINK 110° TO OD OF THREAD, THREAD T, SPECIFICATION MIL-S-7742
30° ±5°
WASHER FACE
30° ±5°
OPTIONAL CHAMFER IN LIEU OF WASHER FACE

AN PART NUMBERS											
ALLOY STEEL	CORROSION-RESISTANT STEEL	BRASS	(f) ALUMINUM ALLOY	(a) THREAD T	(b) A		(c) B REF	C DIA		(d) H	
					MAX	MIN		MAX	MIN	MAX	MIN
AN340-2	AN340C2	AN340B2		NO 2-56 NC-2B	.188	180	217	.188	.169	066	057
AN340-3	AN340C3	AN340B3		NO. 3-48 NC-2B	.188	180	.217	188	169	.066	057
AN340-4	AN340C4	AN340B4		NO 4-40 NC-2B	.250	241	.289	.250	225	.098	.087
AN340-5	AN340C5	AN340B5		NO 5-40 NC-2B	313	302	362	313	282	114	102
AN340-6	AN340C6	AN340B6	~~AN340DD6~~	NO 6-32 NC-2B	.313	302	362	.313	282	114	102
AN340-8	AN340C8	AN340B8	~~AN340DD8~~	NO 8-32 NC-2B	.344	.332	398	.344	.310	130	117
(e) ~~AN340-10~~	~~AN340C10~~	~~AN340B10~~	~~AN340DD10~~	~~NO.10-24 NC-2B~~	~~.375~~	~~.362~~	~~.433~~	~~.375~~	~~.338~~	~~.130~~	~~.117~~
(e) ~~AN340-416~~	~~AN340C416~~	~~AN340B416~~	~~AN340DD416~~	~~1/4-20 UNC-2B~~	~~.438~~	~~.423~~	~~.506~~	~~.438~~	~~.394~~	~~.193~~	~~.178~~
(e) ~~AN340-516~~	~~AN340C516~~	~~AN340B516~~	~~AN340DD516~~	~~5/16-18 UNC-2B~~	~~.563~~	~~.545~~	~~.650~~	~~.563~~	~~.507~~	~~.225~~	~~.208~~
(e) ~~AN340-616~~	~~AN340C616~~	~~AN340B616~~	~~AN340DD616~~	~~3/8-16 UNC-2B~~	~~.625~~	~~.607~~	~~.722~~	~~.625~~	~~.563~~	~~.257~~	~~.239~~

(a) CLASS 2 THREADS MAY BE SUBSTITUTED FOR CLASS 2B THREADS UNTIL EXISTING STOCKS OF THE NUTS WITH CLASS 2 THREADS ARE EXHAUSTED

(b) FOR ALUMINUM-ALLOY NUTS, TOLERANCES ON A MAY CONFORM TO APPLICABLE MATERIAL SPECIFICATIONS FOR BAR AND ROD

(c) REFERENCE DIMENSIONS ARE FOR DESIGN PURPOSES ONLY AND ARE NOT AN INSPECTION REQUIREMENT

(d) THE H DIMENSION SHALL BE MEASURED AT A POINT APPROXIMATELY HALFWAY BETWEEN THE MINOR DIAMETER OF THE HOLE AND THE FLAT OF THE NUT

(e) NO 10, 1/4, 5/16, AND 3/8 SIZES ARE NOT RECOMMENDED FOR NEW DESIGN

(f) ALUMINUM-ALLOY NUTS INACTIVE FOR DESIGN AFTER 19 JULY 1955
FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO 337

MATERIAL STEEL, 50,000 PSI TENSILE STRENGTH, MINIMUM, COMMERCIAL GRADE
CORROSION-RESISTANT STEEL, SPECIFICATION AN-QQ-S-770, CONDITION QT, CLASS II (431) OR SPECIFICATION MIL-S-7720 COMPOSITION FM (303)
BRASS, COMMERCIAL GRADE.
(f) ALUMINUM ALLOY, SPECIFICATION QQ-A-268 OR SPECIFICATION QQ-A-355

HEAT-TREAT (f) ALUMINUM ALLOY, 62,000 PSI TENSILE STRENGTH, MINIMUM, SPECIFICATION MIL-H-6088

⑤ FINISH STEEL, CADMIUM PLATE, SPECIFICATION QQ-P-416, TYPE I, CLASS 2
CORROSION-RESISTANT STEEL, PASSIVATE
BRASS, NONE
(f) ALUMINUM ALLOY, ANODIZE, SPECIFICATION MIL-A-8625.

NUTS SHALL BE FREE OF ALL LOOSE OR HANGING BURRS OR SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE

DIMENSIONS IN INCHES

IN CASE OF CONFLICT, THE REQUIREMENTS SPECIFIED HEREON SHALL TAKE PRECEDENCE OVER THE REQUIREMENTS SPECIFIED IN SPECIFICATION MIL-S-933

INACTIVE FOR DESIGN AFTER 2 MARCH 1967. USE ⑤ MS35649

⑤ CANCELED IN PART AFTER 30 Sep 70 ALL DASH NUMBERS CANCELED IN ALL MATERIALS EXCEPT DASH NUMBERS 3 AND 5 IN ALL MATERIALS SEE INTERCHANGEABILITY TABLE ON MS35649 FOR SUBSTITUTIVE PARTS.

APPROVED 15 Jul 43 REVISED ① 12 Jan 44 ② 17 Apr 45 ③ 19 Jan 55 ④ 2 Mar 67 ⑤ 30 Sep 1970

PROCUREMENT SPECIFICATION
MIL-S-933

AIR FORCE-NAVY AERONAUTICAL STANDARD

NUT, PLAIN, HEXAGON, NON-STRUCTURAL, COARSE THREAD

AN340

SUPERSEDES FORMER AIR FORCE AND NAVY STANDARD ISSUES OF AN340

REVIEWER SYMBOLS
NAVY - AS
ARMY - EL

USER SYMBOLS
USAF - 82
DSA - IS

"Reviewer/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DOD152."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:15Z
Check the source to verify that this is the current version before use.