**DISTRIBUTION STATE.** A APPROVED FOR PUBLIC RELEASE. DISTRIBUTION IS LIMITED

NOTE This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design not later than 6 months after the latest date of approval shown

AMSC N/A

NOTICE When Gov drawings, specifications or other data are used for any purpose other than in connection with a ...ly related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications or any other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto

REVIEWER SN
ARMY-MI
AIR FORCE -..

FED SUP CLASS
5305



ENLARGED VIEW OF HEAD



UNDERCUT HEAD
(d)

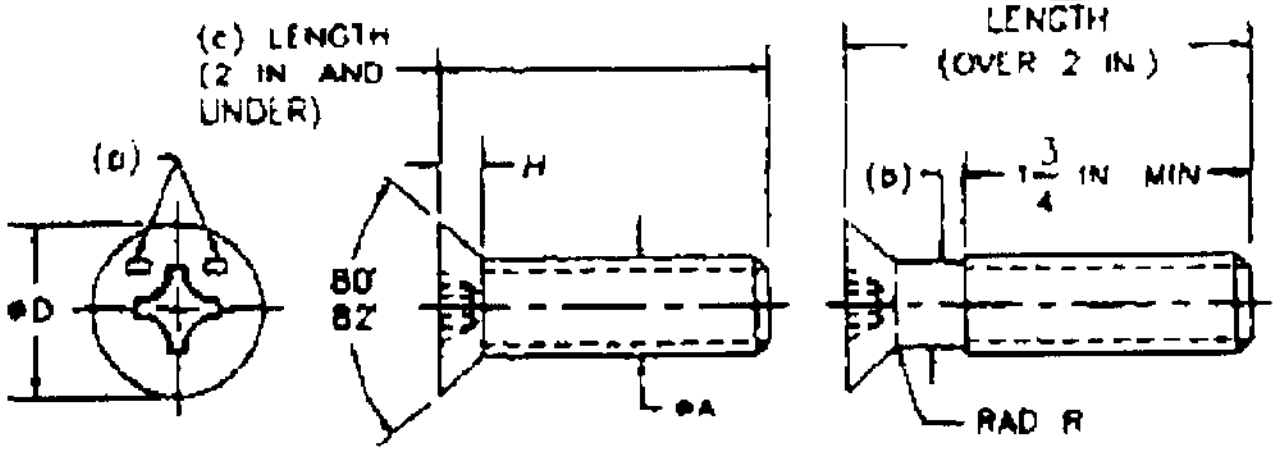

CROSS-RECESSED HEAD SCREW (DESIGN I)

| THREAD SIZE | ØA | ØD | ØD | ØD | F | H REF | H REF | H¹ | H¹ | J | J | K | K | R |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | MAX | MAX SHARP | MIN SHARP | ABSOLUTE MIN WITH MAX F | MAX | MAX | MIN | MAX | MIN | MAX | MIN | MAX | MIN | MAX |
| NO 2-56 UNC-2A | .086 | 172 | 156 | 150 | .014 | .051 | .040 | 036 | .028 | .031 | .023 | .023 | 015 | .035 |
| NO 3-48 UNC-2A | 099 | 189 | 181 | 175 | 015 | 059 | 048 | 041 | 034 | 035 | .027 | 027 | 017 | 040 |
| NO 4-40 UNC-2A | 112 | 225 | 207 | 200 | 016 | 067 | 055 | .047 | .039 | .039 | .031 | 030 | 020 | 050 |
| NO 5-40 UNC-2A | 125 | 252 | 232 | 225 | 018 | 075 | 062 | .053 | .043 | 043 | 035 | 034 | 022 | 050 |
| NO 6-32 UNC-2A | 138 | 279 | 257 | 249 | 019 | 083 | 069 | 058 | 048 | 048 | 039 | 038 | 024 | 060 |
| NO 8-32 UNC-2A | 164 | .332 | 308 | 300 | 022 | 100 | 084 | 070 | 059 | 054 | 045 | 045 | 029 | 060 |
| NO 10-24 UNC-2A | 190 | 385 | 359 | 348 | 025 | 116 | .098 | 081 | 069 | 060 | 050 | 053 | 034 | 085 |
| 1/4-20 UNC-2A | .250 | 507 | 477 | 462 | 031 | 153 | 131 | 107 | 092 | 075 | 064 | 070 | 046 | 100 |
| 5/16-18 UNC-2A | 313 | 635 | 600 | 581 | 037 | 191 | 165 | 134 | 116 | 084 | 072 | 088 | 058 | 110 |
| 3/8-16 UNC-2A | .375 | 762 | 722 | 700 | 043 | .230 | .200 | 161 | 140 | 094 | 081 | 106 | 070 | 125 |

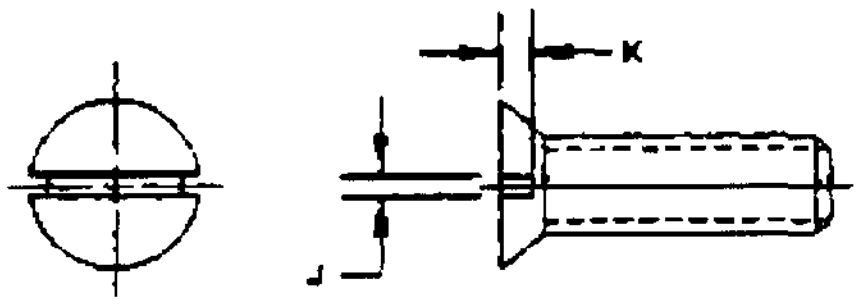

SLOTTED HEAD SCREW (d)

SLOTTED HEAD SCREWS ARE INACTIVE FOR NEW DESIGN AFTER 17 FEB 59 - SEE NOTE 7

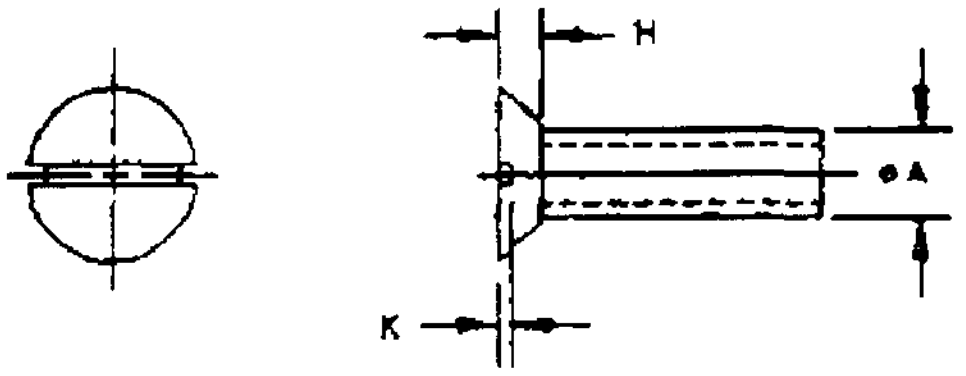

UNDER CUT DIMENSIONS-SLOTTED HEAD SCREW

⑤

| SIZE | ØA | H | H | K | K |
|---|---|---|---|---|---|
| | MAX | MAX | MIN | MAX | MIN |
| NO 2-56UNC -2A | 086 | 036 | 028 | 022 | 015 |
| NO 3-48UNC -2A | .099 | .041 | .034 | .025 | 017 |
| NO 4-40UNC -2A | 112 | 047 | 039 | .028 | .020 |
| NO 5-40UNC -2A | 125 | 053 | 043 | .031 | 022 |
| NO 6-32UNC -2A | .138 | .058 | .048 | .035 | .024 |
| NO 8-32UNC -2A | 164 | 070 | 059 | 040 | 029 |
| NO 10-24UNC -2A | 190 | 081 | 069 | .047 | .034 |
| 1/4 -20UNC -2A | 250 | 107 | 092 | 061 | 046 |
| 5/16-18UNC -2A | 313 | 134 | 116 | 076 | 058 |
| 3/8-16UNC -2A | 375 | 161 | 140 | 091 | .070 |

(a) SEE REQUIREMENT 10
(b) SEE REQUIREMENT 6
(c) SEE REQUIREMENT 5
(d) SEE REQUIREMENT 7

APPROVED 15 MAY 43 REVISED ① 15 JUN 50 ② 21 FEB 52 ③ 17 FEB 59 ④ 30 JUN 94 ⑤ 31 MAY 95 ⑥ 22 APR 96

P A DLA-IS

Other Cust
ARMY-AV
NAVY-AS
AIR FORCE 99

PROCUREMENT SPECIFICATION
FF S 92

AIR FORCE - NAVY AERONAUTICAL STANDARD

SCREW, MACHINE, FLAT HEAD, 82 DEGREE,
COARSE THREAD

SUPERSEDES FORMER AIR FORCE AND NAVY STANDARD ISSUE OF AN505 AND USAF DRAWINGS 4284937 42B5702

# AN505

SHEET 1 OF 3

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NO 5305 2134

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:15Z
Check the source to verify that this is the current version before use.