
FED SUP CLASS
5305

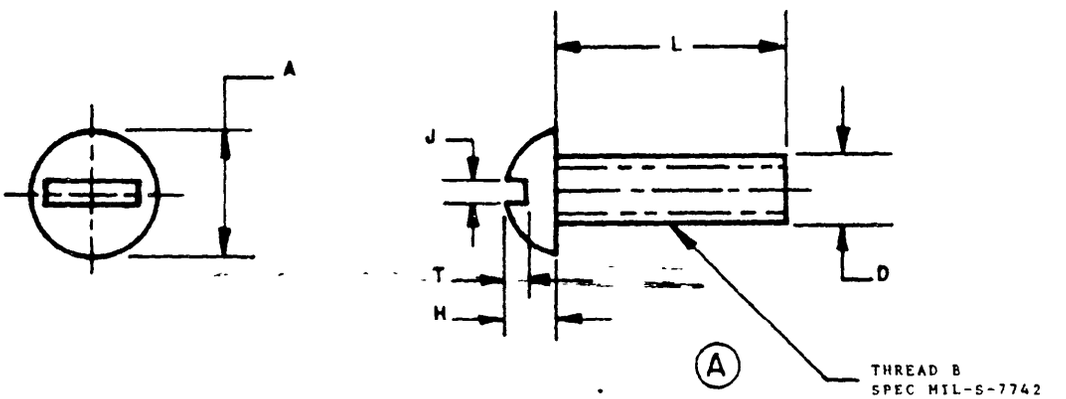

(A) SIZE	THREAD B	D DIA MAX	A DIA	L ±.006	J	T
4	4-40 UNC-2B	112	202 ± 009	081	034 ± 006	051 +.007 −.008
6	6-32 UNC-2B	138	250 ± 010	097	039 ± .006	059 +.008 − 009
8	8-32 UNC-2B	164	298 ± 011	113	044 +.006 −.007	067 +.009 − 010
10	10-32UNF-2B	190	347 +.012 − 013	130	048 ± 007	075 ± 011

LENGTH L	DASH NUMBERS 4	6	8	10
1/8	4-2			
3/16	4-3	6-3	8-3	10-3
1/4	4-4	6-4	8-4	10-4
5/16	4-5	6-5	8-5	10-5
3/8	4-6	6-6	8-6	10-6

(A) MATERIAL BRASS, SPEC QQ-B-626

(A) FINISH SILVER PLATE QQ-S-365 OR TIN, MIL-T 10727

(A) EXAMPLE OF PART NO AN508-6-3= #6 SCREW, 3/16 LONG

REMOVE ALL BURRS

DIMENSIONS IN INCHES

(A) PACKAGE OR CONTAINER TO BE IDENTIFIED PER MIL-STD-130

APPROVED 6 APR 45 REVISED (A) 23 MAR 84

P A AF 82
Other Cust
ARMY-AV
AF-99

INTERNATIONAL INTEREST

TITLE
SCREW-
ROUND HEAD MACHINE (FOR ELECT. USE)

AN508

PROCUREMENT SPECIFICATION
NOT REQUIRED

SUPERSEDES

SHEET 1 OF 1

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USER ACTIVITIES
S ARMY-MI
DLA-IS
REVIEWER
approved for use by all Departments and Agencies of the Department of Defense
Selection for the engineering and design applications and for repetitive use shall be made from this document
Source: https://assist.dla.mil -- Downloaded: 202610-26T14:15Z
Check the source to verify that this is the current version before use.

PROJECT 5305-1503