

FSC 5340

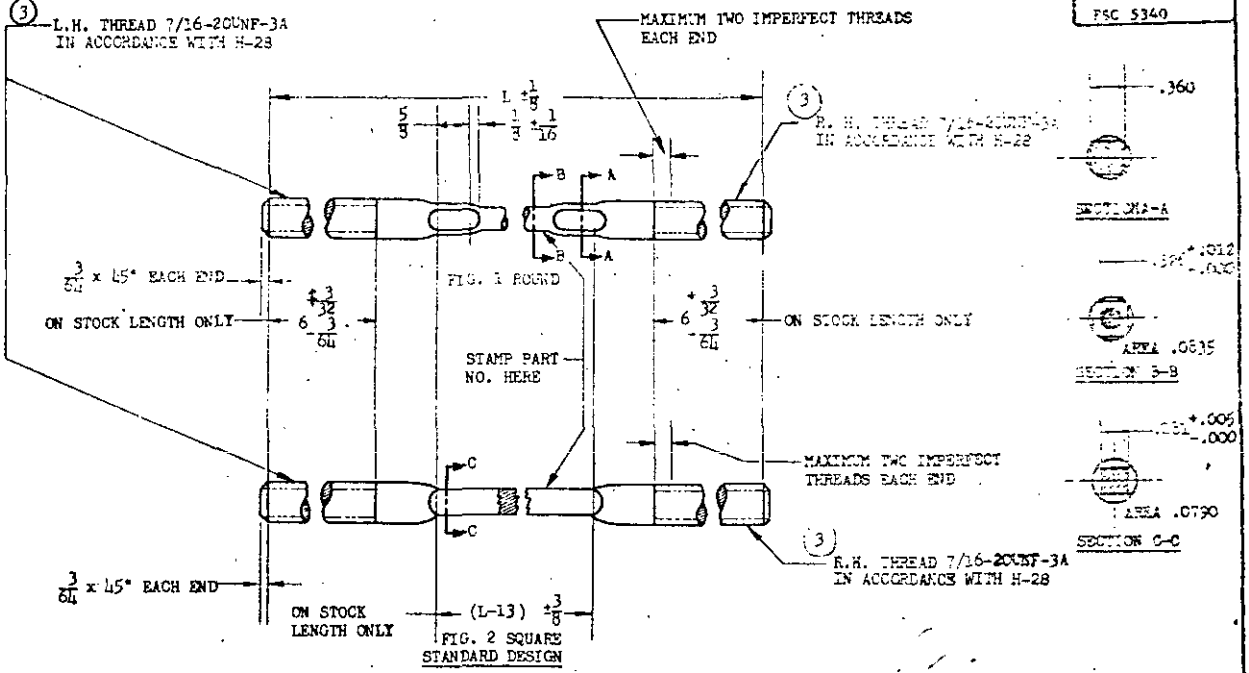

DASH NO.	L	DASH NO.	L	DASH NO.	L	DASH NO.	L	DASH NO.	L	DASH NO.	L	DASH NO.	L	DASH NO.	L	DASH NO.	L	DASH NO.	L	DASH NO.	L
24	24	56	56	88	88	120	120	152	152	184	184	216	216	248	248	280	280	312	312	344	344
32	32	64	64	96	96	128	128	160	160	192	192	224	224	256	256	288	288	320	320	352	352
40	40	72	72	104	104	136	136	168	168	200	200	232	232	264	264	296	296	328	328	360	360
48	48	80	80	112	112	144	144	176	176	208	208	240	240	272	272	304	304	336	336		

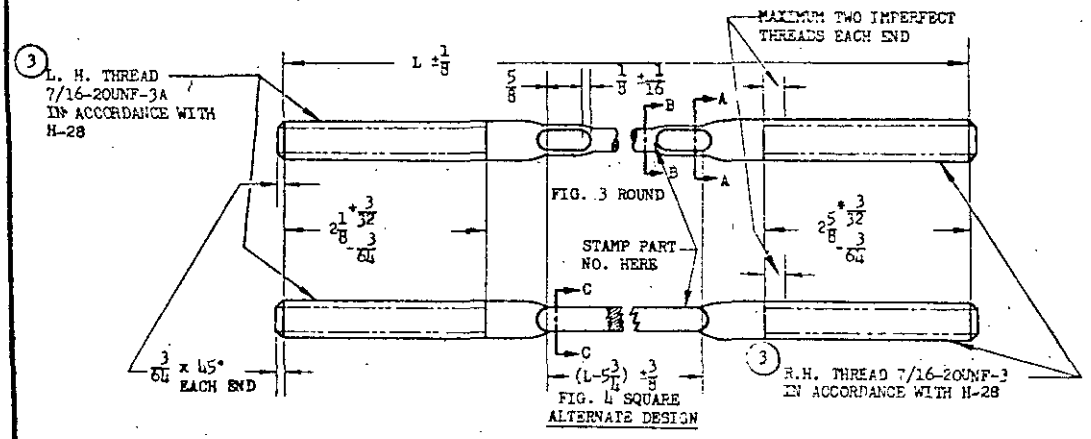

NOTE: A Government drawing, specification, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MATERIAL: CARBON STEEL, CORROSION RESISTING STEEL. SEE PROCUREMENT SPECIFICATION.

(3) FINISH: CADMIUM PLATE, QQ-P-416, TYPE II, CLASS 3.

THREAD: MINIMUM THREAD FOR RIGID TERMINAL AND LOCK NUT 2-1/8.
AIRPLANE MANUFACTURERS ARE PERMITTED TO INSTALL RODS WITH MINIMUM LENGTH OF THREADS AS INDICATED IN ALTERNATE DESIGN, ON AIRPLANES SUPPLIED ON GOVERNMENT ORDERS.

LENGTH "L" SHALL BE THE NEAREST 25/100, AS 1825, 1850, 1875, 19, 1925 TO FIT, FIGURING 50% TAKE UP AND 50% LET OUT. TO FIND ROD LENGTH SUBTRACT 2-1/2 FROM LENGTH BETWEEN PIN CENTERS OF ASSEMBLY.

CUT OFF EQUAL AMOUNT FROM EACH END OF STANDARD DESIGN STOCK SIZES FOR INTERMEDIATE LENGTHS.

PART NO. SHALL INDICATE THE EXACT LENGTH OF ROD WITH LETTER "A" AFTER AFTER BASIC NO. FOR THE ALTERNATED DESIGN.

RODS OF THE STANDARD DESIGN, WHICH WILL BE USED FOR REPLACEMENT PURPOSES, WILL BEAR THE SAME NO. AS THOSE OF THE ALTERNATE DESIGN, WITHOUT THE LETTER "A".

FOR CORROSION RESISTING STEEL RODS INSERT "C" BEFORE DASH NO.

EXAMPLE OF PART NOS.: AN707A3050 = 7/16-20 ROD, 30-1/2 INCH LONG, ALTERNATE DESIGN, CARBON STEEL.
AN707-3050 = 7/16-20 ROD, 30-1/2 INCH LONG, STANDARD DESIGN, CARBON STEEL.
AN707C3050 = 7/16-20 ROD, 30-1/2 INCH LONG, STANDARD DESIGN, CORROSION RESISTING STEEL.

REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ON FRACTIONS ±1/64, DECIMALS ±.010, ANGLES ±1/2°.

CANCELED AFTER 6 AUG 82, NO SUPERSEDING STANDARD.

APPROVED 2 Sep 42 REVISED (1) 24 Jun 43 (2) 8 May 51 (3) 25 JUN 66 (4) 6 AUG 82

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN707
MIL-T-5684	TIE ROD—INTERNAL 11,500 LB (7/16-20)	

SUPERSEDES FORMER ARMY AND NAVY STANDARD ISSUES OF AN707

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:15Z
Check the source to verify that this is the current version before use.