
FED. SUP CLASS
4730

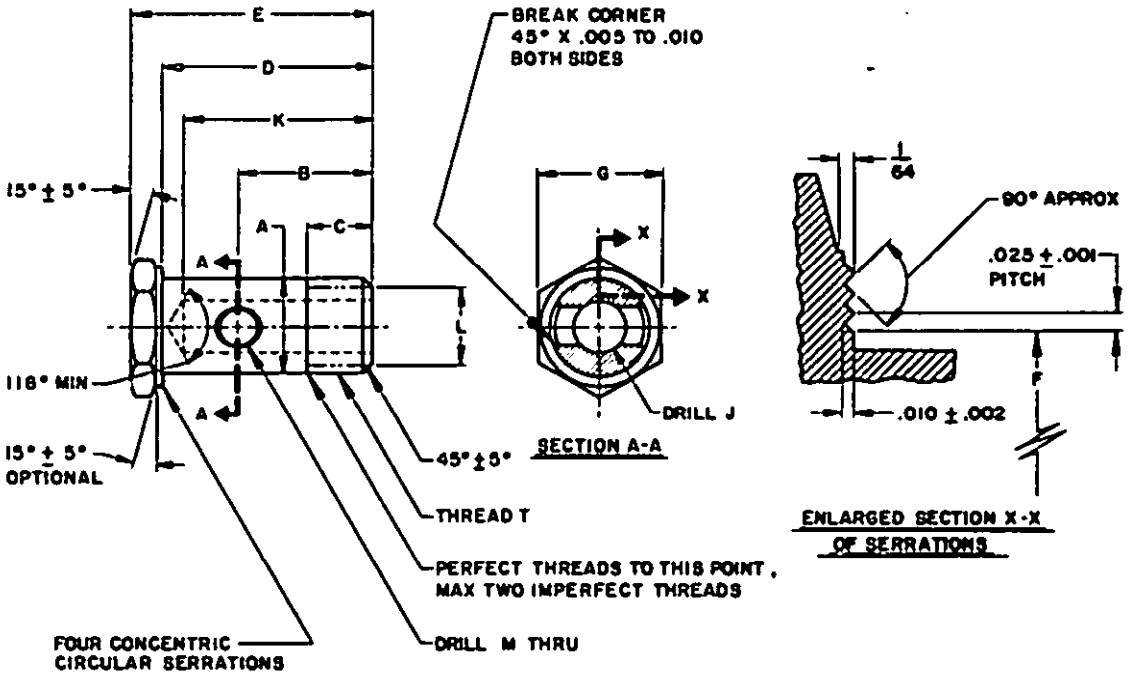

DIMENSIONS T, A, F, AND J SHALL BE CONCENTRIC WITHIN .003 TOTAL INDICATOR READING.
MATERIAL: STEEL (125,000 PSI MINIMUM TENSILE STRENGTH); ALUMINUM ALLOY; CORROSION RESISTANT STEEL (CRES); TITANIUM ALLOY; BARS, SHAPES, OR FORGINGS (SEE PROCUREMENT SPECIFICATION).

FINISH: SEE PROCUREMENT SPECIFICATION.

BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS.

NO CODE LETTER IN PART NUMBER FOR STEEL.
ADD D AFTER DASH NUMBER FOR ALUMINUM ALLOY (EXCEPT 7075-T73).
ADD J AFTER DASH NUMBER FOR CRES, TYPE 304.
ADD K AFTER DASH NUMBER FOR CRES, TYPE 316.
ADD S AFTER DASH NUMBER FOR CRES, TYPE 347.
ADD T AFTER DASH NUMBER FOR TITANIUM ALLOY.
ADD W AFTER DASH NUMBER FOR 7075-T73 ALUMINUM ALLOY.

TITANIUM IS NOT RECOMMENDED FOR USE IN OXYGEN SYSTEMS.

EXAMPLE OF PART NUMBERS:
AN775-8 - BOLT, 1/2 TUBING, STEEL.
AN775-8D - BOLT, 1/2 TUBING, ALUMINUM ALLOY (EXCEPT 7075-T73).
AN775-8J - BOLT, 1/2 TUBING, CRES, TYPE 304.
AN775-8K - BOLT, 1/2 TUBING, CRES, TYPE 316.
AN775-8S - BOLT, 1/2 TUBING, CRES, TYPE 347.
AN775-8T - BOLT, 1/2 TUBING, TITANIUM ALLOY.
AN775-8W - BOLT, 1/2 TUBING, 7075-T73 ALUMINUM ALLOY.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, ANGLES ±1/2°.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(12) ENTIRE STANDARD REVISED

APPROVED 3 FEB 81 REVISED (12) 22 Mar 84

USER ACTIVITIES
ARMY - , AV

REVIEWER ACTIVITIES
NAVY - AS
DLA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P. A. AIR FORCE - 82 Other Cust AF-99	INTERNATIONAL INTEREST	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN775
		BOLT - FLUID PASSAGE	
PROCUREMENT SPECIFICATION MIL-F-5509	SUPERSEDES:		SHEET 1 OF 2

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT 4730-0356

Source: https://assist.dla.mil -- Downloaded: 202610-26T14:16Z
Check the source to verify that this is the current version before use.

FED. SUP. CLASS: 4730

DASH NO.	TUBING OD	THREAD T (REF)	A +.000 -.004 DIA	B ±.010	C	D
4	1/4	7/16-20UNJF-3A	.435	.781	7/16	1- 3/16
5	5/16	1/2 -20UNJF-3A	.498			
6	3/8	9/16-18UNJF-3A	.560	.875	15/32	1-11/32
8	1/2	3/4 -16UNJF-3A	.748	1.094	9/16	1-11/16
10	5/8	7/8 -14UNJF-3A	.873	1.250	19/32	1-31/32
12	3/4	1-1/16-12 UNJ-3A	1.060	1.468	21/32	2- 5/16
16	1	1-5/16-12 UNJ-3A	1.310	1.687		2-13/16

DASH NO.	E	F +.010 -.000 DIA	G		J DIA	K	L DIA	M DIA
4	1- 3/8	.469	6.88	±.004	11/64	1- 5/32	11/32	3/16
5		.531	.750		15/64		13/32	7/32
6	1- 9/16	.594	.813		19/64	1- 5/16	15/32	1/4
8	1-15/16	.781	1.000		25/64	1-21/32	5/8	5/16
10	2- 1/4	.906	1.125	±.005	31/64	1-15/16	3/4	3/8
12	2- 5/8	1.094	1.375		39/64	2- 5/32	15/16	7/16
16	2- 3/16	1.344	1.625	±.016	27/32	2-37/64	1- 3/16	5/8

USER ACTIVITIES: ARMY - AV

REVIEWER ACTIVITIES: NAVY - AS DLA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

APPROVED 3 FEB 41 REVISED (12) FOR CHANGES SEE PAGES 1 & 2.

(12) ENTIRE STANDARD REVISED

P. A. AIR FORCE - 82. Other Cost AF-99.

INTERNATIONAL INTEREST:

AIR FORCE-NAVY AERONAUTICAL STANDARD

BOLT, FLUID PASSAGE

AN775

PROCUREMENT SPECIFICATION MIL-F-5509

SUPERSEDES:

SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT 4730-0356

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:16Z
Check the source to verify that this is the current version before use.