NOTE: Where Government drawings, specifications, or other data cited for any purpose other than to connection with any related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

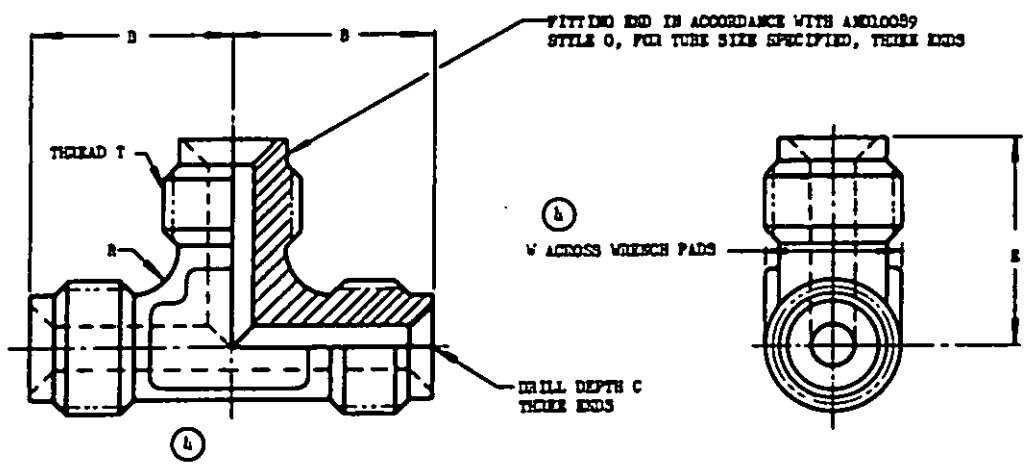

	DASH NO. ERASS	DASH NO. CORROSION-RESISTANT STEEL	TUBE DIA	THREAD T	B +.047 -.000	C +.047 -.000	E +.047 -.000	R ±.015 RAD	W ±.015 (4)	WEIGHT MAX (5) ERASS	WEIGHT MAX (5) CORROSION-RESISTANT STEEL
	2	C2	.125	5/16-32 UNF-3A	.625	.625	.625	.062	.312		
(b)	3	C3	.188	3/8 -24 UNF-3A	.688	.688	.688		.375		
	4	C4	.250	7/16-20 UNF-3A	.750	.750	.750	.094	.438		
	5	C5	.312	1/2 -20 UNF-3A	.875	.875	.875				
	6	C6	.375	5/8 -18 UNF-3A	1.000	1.000	1.000		.625		
(c)	8	C8	.500	3/4 -16 UNF-3A	1.188	1.188	1.188		.750		
	10	C10	.625	15/16-14 NS-3	1.250	1.250	1.250	.125	.938		
	12		.750	1-3/8 -12 UNF-3A	1.375	1.375	1.375				
(a)	16		1.000	1-1/2 -12 UNF-3A	1.625	1.625	1.625		1.125		

(a) INACTIVE FOR DESIGN AFTER 23 NOV 42.

(b) INACTIVE FOR DESIGN AFTER 9 MAY 47, EXCEPT FOR OXYGEN SYSTEMS AND ENGINE PRIMER LINES.

(c) DASH NUMBERS 5, 6, 8, AND 10, ARE NOT TO BE USED ON ENGINE PRIMER LINES.

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE AAA BULLETIN NO. 337.

MATERIAL: ERASS; BARS, SHAPES OR FORGINGS.
CORROSION-RESISTANT STEEL; BARS, SHAPES OR FORGINGS.
SEE PROCUREMENT SPECIFICATION.

FINISH: SEE PROCUREMENT SPECIFICATION.

ADD P BEFORE DASH NUMBER FOR CADMIUM-PLATED ERASS TEE.

EXAMPLES OF PART NUMBERS: AN795-4 - TEE - UNION, ERASS FOR .250 TUBING OD.
AN795P4 - TEE - UNION, ERASS, CADMIUM PLATED FOR .250 TUBING OD.
AN795C4 - TEE - UNION, CORROSION-RESISTANT STEEL FOR .250 TUBING OD.

ERASE ALL SHARP EDGES AND REMOVE ALL HANDING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005, ANGLES ±1/2°.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all interdepartmental standard drawings for the same product and shall become effective for the procurement of conventional supplies, or for use in new designs, not later than 6 months after the latest date of approval shown.

APPROVED 23 Nov 42 REVISED (1) 9 May 47 (2) 28 Feb 49 (3) 1 Jun 54 (4) 20 Aug 56

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN795
MIL-F-6001	TEE, UNION	

Source: https://assist.dla.mil -- Downloaded: 2026-0-26 14:16Z
Check the source to verify that this is the current version before use.