FED. SUP CLASS
4730

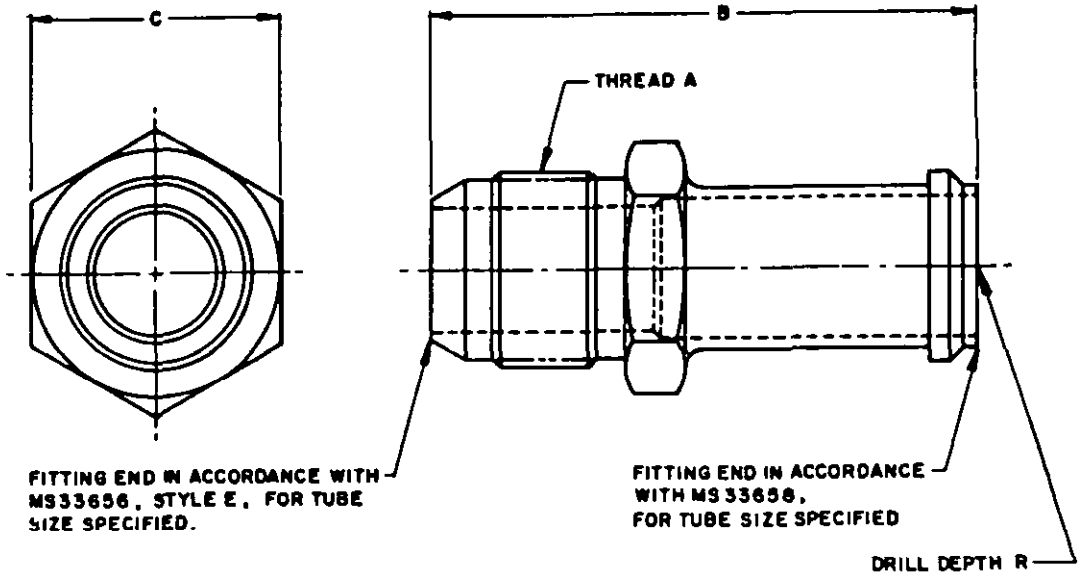


(5)

| DASH NO. COPPER ALLOY | DASH NO. AL ALLOY | HOSE ID | TUBE OD | THREAD A REF | B ±1/32 | C | | R |
|---|---|---|---|---|---|---|---|---|
| -4 | -4D | 1/4 | 1/4 | 7/16-20 UNJ-3A | 2-1/4 | .688 | +.004 -.006 | 1-5/8 |
| -6 | -6D | 3/8 | 3/8 | 9/16-18 UNJ-3A | 2-5/16 | .813 | | |
| -8 | -8D | 1/2 | 1/2 | 3/4-16 UNJ-3A | 2-7/16 | 1.000 | | |
| -10 | -10D | 5/8 | 5/8 | 7/8-14 UNJ-3A | 2-9/16 | 1.125 | +.005 -.006 | |
| -12 | -12D | 3/4 | 3/4 | 1-1/16-12 UNJ-3A | 2-11/16 | 1.375 | | |
| -16 | -16D | 1 | 1 | 1-5/16-12 UNJ-3A | 2-25/32 | 1.625 | +.008 -.016 | |

MATERIAL: COOPER ALLOY - BARS.
ALUMINUM ALLOY - BARS.
SEE PROCUREMENT SPECIFICATION.

FINISH: SEE PROCUREMENT SPECIFICATION.

EXAMPLES OF PART NOS: AN841-6 = ADAPTER, 3/8 (6/16) ID HOSE, COPPER ALLOY.
AN841-6D = ADAPTER, 3/8 (6/16) ID HOSE, ALUMINUM ALLOY.

BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.005 (5)

CANCELED 19 APRIL 1954, SEE DRAWING AN807

(5) REINSTATED AS OF: 19 April 1982

APPROVED 1 MAR 41 REVISED (5) 19 APR 82

USER ACTIVITIES

REVIEWER ACTIVITIES
ARMY - MI

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

| P. A | INTERNATIONAL INTEREST | AIR FORCE-NAVY AERONAUTICAL STANDARD | AN841 |
|---|---|---|---|
| AIR FORCE - 99 Other Cust ARMY - AV | | ADAPTER - HOSE TO FLARED TUBE | |
| PROCUREMENT SPECIFICATION MIL-F-5509 | SUPERSEDES | | SHEET 1 OF 1 |

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:16Z
Check the source to verify that this is the current version before use.