AN149151
THRU
AN149250

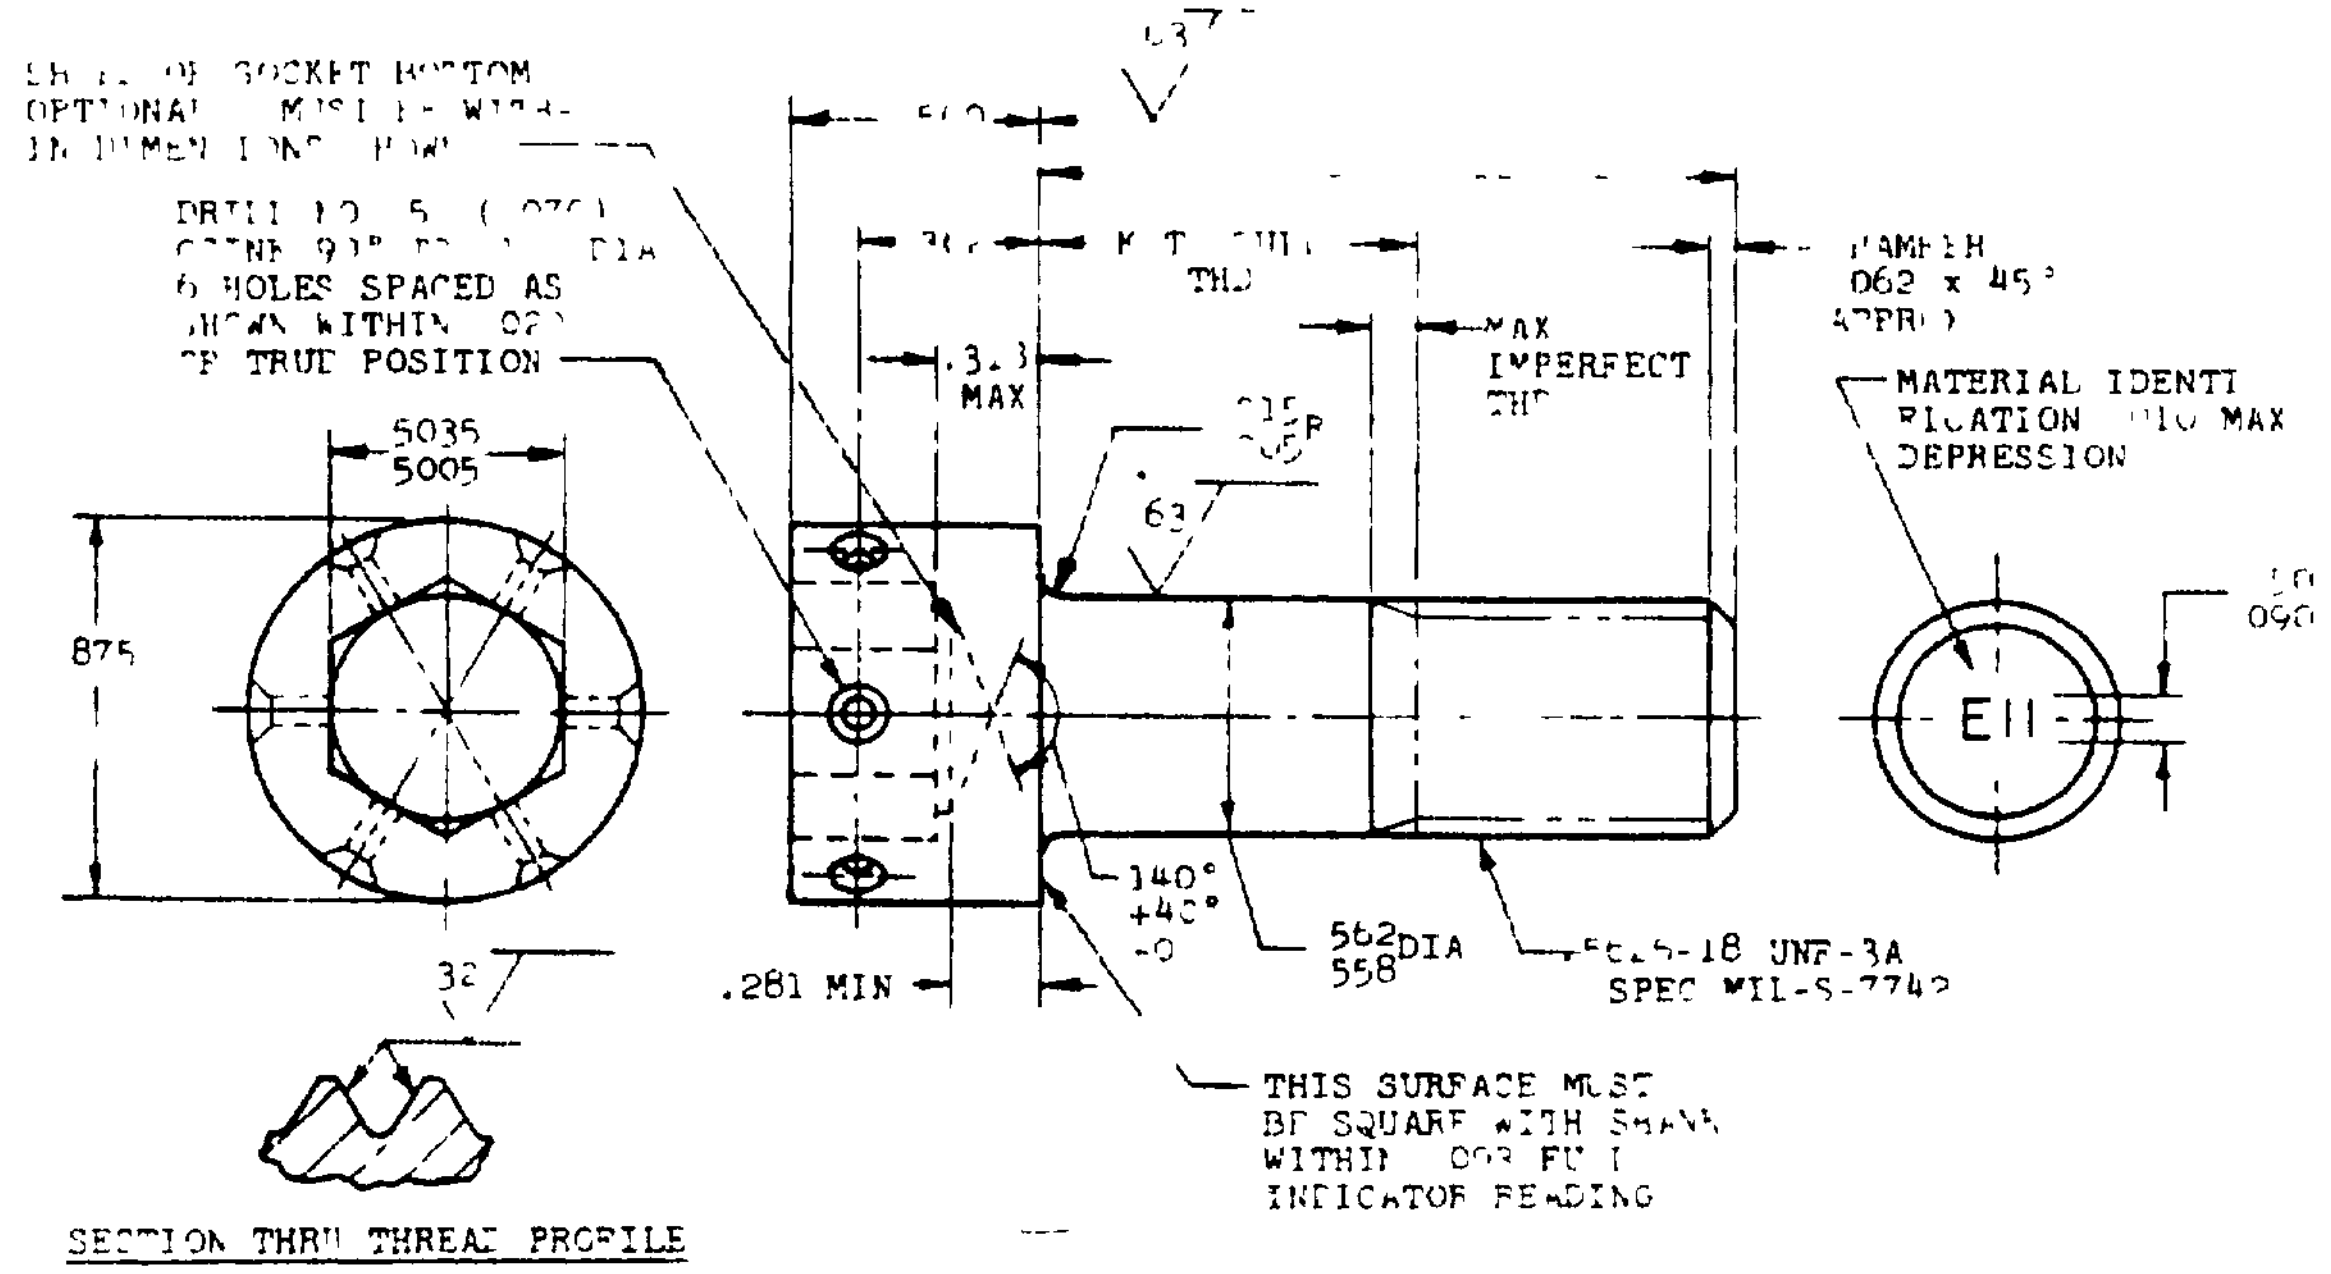
SHAPE OF SOCKET BOTTOM OPTIONAL MUST BE WITHIN DIMENSIONS SHOWN
DRILL NO 5 (.070) CSTNK 91° ... DIA
6 HOLES SPACED AS SHOWN WITHIN .020 OF TRUE POSITION
5035
5005
875
32
510
313 MAX
K T THD
THD
MAX IMPERFECT THD
CHAMFER 062 x 45° APPROX
MATERIAL IDENTIFICATION 010 MAX DEPRESSION
63
015 R
005
63
E11
10
090
140° +40° -0
.281 MIN
562 DIA
558
5625-18 UNF-3A SPEC MIL-S-7742
THIS SURFACE MUST BE SQUARE WITH SHANK WITHIN 002 FULL INDICATOR READING

SECTION THRU THREAD PROFILE

L	K + 000 - 060	PART NO	L	K + 000 - 060	PART NO	L	K + 000 - 060	PART NO	L	K +.000 - 060	PART NO
			1 938	562	AN149179	3 250	1 875	AN149193	5 000	3 625	AN149207
[illegible]	(a)	[illegible]	[illegible]	625	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
1 188	(a)	AN149167	2 062	685	AN149181	3 500	2 125	AN149195	5 250	3 875	AN149209
1 250	(a)	AN149168	2 125	750	AN149182	3 625	2 250	[illegible]	5 375	4 000	AN149210
1 312	(a)	AN149169	[illegible]	812	AN149183	3 750	2 375	[illegible]	5 500	4 125	[illegible]
[illegible]	(a)	[illegible]	[illegible]	875	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
1 438	(a)	AN149171	2 312	938	AN149185	4 000	2 625	AN149199	5 750	4 375	AN149213
1 500	(a)	AN149172	2 375	1 000	AN149186	4 125	2 750	AN149200	5 875	4 500	AN149214
1 562	(a)	AN149173	2 500	1 125	AN149187	4 250	2 875	AN149201	6 000	4 625	AN149215
1 625	250	AN149174	2 625	1 250	AN149188	4 375	3 000	AN149202			
1 688	312	AN149175	2 750	1 375	AN149189	4 500	3 125	AN149203			
1 750	375	AN149176	2 875	1 500	AN149190	4 625	3 250	AN149204			
1 812	438	AN149177	3 000	1 625	AN149191	4 750	3 375	AN149205			
1 875	500	AN149178	[illegible]	1 750	[illegible]	[illegible]	[illegible]	[illegible]			

(a) THREAD TO HEAD MAXIMUM TWO IMPERFECT THREADS

NOTE
(1) THE RUNOUT FOR STRAIGHTNESS OF SHANK SHALL NOT EXCEED 002 FIR PER INCH OF BOLT LENGTH
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN 005 FIR
(3) THE CONCENTRICITY OF THE HEXAGON SOCKET IN RELATION TO OD OF HEAD SHALL BE WITHIN 005 FIR
(4) THE CONCENTRICITY OF THE SHANK IN RELATION TO OD OF HEAD SHALL BE WITHIN 005 FIR

MATERIAL STEEL AMS 6322

HARDNESS ROCKWELL [illegible]

FINISH CADMIUM PLATE AMS [illegible]

SURFACE ROUGHNESS [illegible]

MANUFACTURING SPECIFICATION AMS 7452 PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640

BREAK SHARP EDGES 003- 015 UNLESS OTHERWISE SPECIFIED

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED TOLERANCES, LINEAR DIMENSIONS 010, ANGULAR
DIMENSIONS ±2°

DO NOT USE UNASSIGNED PART NUMBERS

② INACTIVE FOR DESIGN AFTER 1 JAN 1960 SEE DRAWING MS9094

For definition and application of drawing status notes, see ANA bulletin

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE

APPROVED 30 Jun 49 **REVISED** (1) 7 Jan 53 (2) 1 Aug 58

NOTE This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design not later than 6 months after the latest date of approval shown.

NOTICE When Government drawings, specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD BOLT-SOCKET HEAD, 6 HOLES DRILLED, 5625-18	AN149151 THRU AN149250

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:27Z
Check the source to verify that this is the current version before use.