

MILITARY SPECIFICATION SHEET

(D) TERMINALS, LUG AND SPLICES, CONDUCTOR, CRIMP STYLE, COPPER
TERMINAL, LUG, CRIMP STYLE, COPPER, INSULATED, RING TONGUE,
FOR THIN WALL WIRE, TYPE II CLASS 1
(D) FOR 105°C TOTAL CONDUCTOR TEMPERATURE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the terminal described herein shall consist of this document and the issue in effect of specification MIL-T-7928.

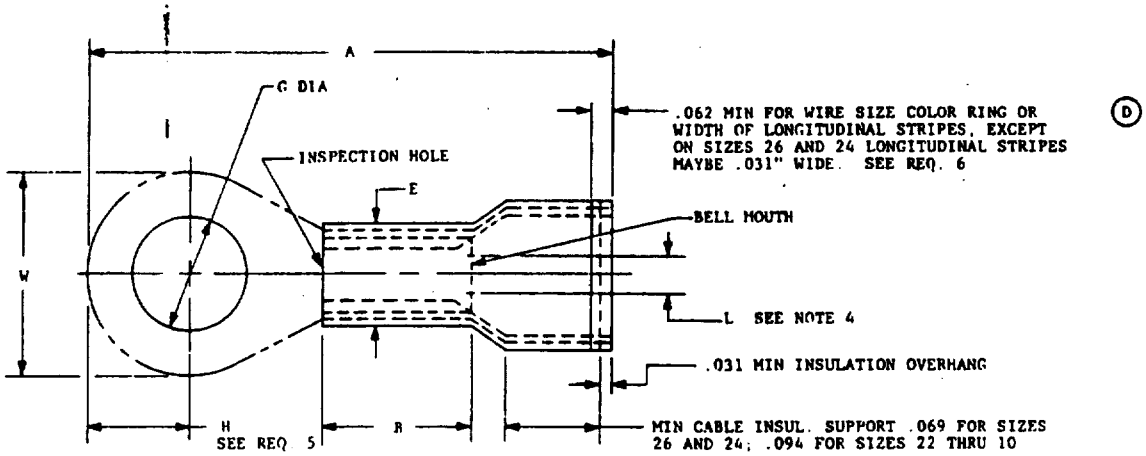

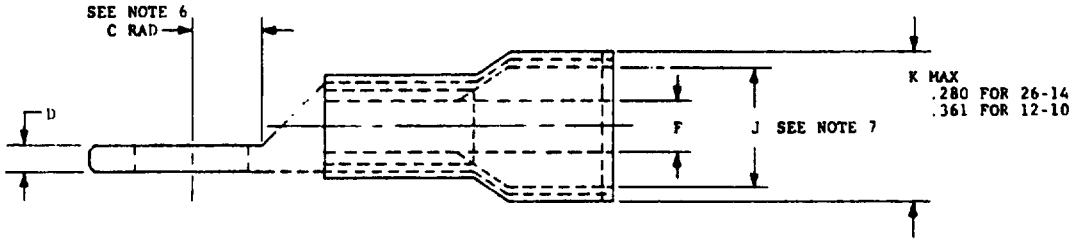

REQUIREMENTS:

1. MATERIAL: SEE ACQUISITION SPECIFICATION.
2. INSULATION MATERIAL: SEE ACQUISITION SPECIFICATION.
3. FINISH: TIN PLATED. SEE ACQUISITION SPECIFICATION.
4. AVERAGE DIAMETER OF "E" AND "F" SHALL BE WITHIN SPECIFICATION DIMENSIONS.
5. "H" MAX AND MIN DIMENSIONS SHALL BE ONE HALF OF "W" MAX AND MIN DIMENSIONS, RESPECTIVELY.
6. THE COLOR RING MUST COVER A MINIMUM OF 315° OF THE CIRCUMFERENCE. IN LIEU OF THE WIRE SIZE COLOR RING, 3 OR MORE LONGITUDINAL STRIPES EQUALLY SPACED ON THE INSULATION PORTION OF THE TERMINAL MAY BE USED. THE STRIPES MUST BE EXTENDED TO WITHIN 1/16" OF THE ENDS OF THE INSULATION AND MUST NOT OBLITERATE THE BASIC SLEEVE COLOR.
7. COLORS: WIRE SIZE COLOR SHALL BE IN ACCORDANCE WITH EIA STANDARDS RS-359. THERE SHALL BE A DISTINCT CONTRAST BETWEEN THE INSULATION SLEEVE COLOR AND THE WIRE SIZE COLOR.
8. (D) QUALIFICATION: FOR QUALIFICATION TESTING ONLY TERMINALS SHALL BE TESTED WITH MIL-W-81381/7 OR MIL-W-81044/18 WIRE AND TOOLING AS FOLLOWS: MIL-C-22520/5-01 TOOLING WITH MIL-C-22520/5-100 DIES INSTALLED FOR SIZES 22 THROUGH 10 TERMINALS; OR MIL-C-22520/10-01 TOOLING WITH MIL-C-22520/10-101 DIES INSTALLED FOR SIZES 26 THROUGH 14 TERMINALS AND MIL-C-22520/10-100 DIES INSTALLED FOR SIZES 12 THROUGH 10 TERMINALS. EXISTING MS90413 AND MS3316 TOOLS IN THE FIELD MAY BE USED UNTIL WORN OUT.
9. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE LETTER "M" SPECIFICATION SHEET NUMBER, AND DASH NUMBER. EXAMPLE OF PART NUMBER: M7928/1-15 TERMINAL FOR SIZE 22 WIRE WITH A NO. 10 STUD HOLE.

(D) DENOTES CHANGES

FSC 5940

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:37Z
Check the source to verify that this is the current version before use.

(D)

INCHES	mm	INCHES	mm
.022	0.56	.193	4.90
.027	0.69	.202	5.13
.028	0.71	.203	5.16
.029	0.74	.210	5.33
.031	0.79	.215	5.46
.033	0.84	.227	5.77
.034	0.86	.230	5.84
.037	0.94	.234	5.94
.039	0.99	.240	6.10
.042	1.07	.245	6.22
.043	1.09	.250	6.35
.048	1.22	.260	6.60
.052	1.32	.265	6.73
.056	1.42	.275	6.99
.059	1.50	.296	7.52
.060	1.52	.300	7.62
.062	1.57	.338	8.59
.063	1.60	.365	9.27
.069	1.75	.375	9.53
.070	1.78	.380	9.65
.074	1.88	.385	9.78
.078	1.98	.400	10.16
.080	2.03	.450	11.43
.090	2.29	.453	11.51
.091	2.31	.473	12.01
.094	2.39	.500	12.70
.095	2.41	.510	12.95
.098	2.49	.516	13.11
.100	2.54	.520	13.21
.110	2.79	.525	13.34
.112	2.84	.536	13.61
.114	2.90	.540	13.72
.115	2.92	.573	14.55
.118	3.00	.598	15.19
.122	3.10	.705	17.91
.125	3.18	.720	18.29
.126	3.20	.740	18.80
.130	3.30	.786	19.96
.131	3.38	.801	20.35
.135	3.43	.820	20.83
.138	3.51	.886	22.50
.142	3.61	.911	23.14
.150	3.81	.956	24.28
.152	3.86	.961	24.41
.156	3.96	1.131	28.73
.164	4.17	1.136	28.85
.168	4.27	1.198	30.43
.171	4.34	1.271	32.28
.178	4.52	1.366	34.70
.180	4.57	1.400	35.56
.190	4.83	1.492	37.90

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:37Z
Check the source to verify that this is the current version before use.

TABLE

DASH NO.	TERM. SIZE	STUD SIZE	A MAX.	B MIN.	C MIN RAD.	D	E DIA	F DIA	G DIA MAX	G DIA MIN	J MIN DIA	L	W MAX	W MIN	INSUL. SLEEVE COLOR	WIRE SIZE COLOR
1	26	2 (.086)	.740	.126	.133	.028/.022	.215/.190	.033/.022	.098	.090	.060	.028/.022	.210	.133	YELLOW	BLACK
2		4 (.112)	.786		.171				.122	.114			.260	.193		
3		6 (.138)	.886		.202				.152	.142				.245		
4		8 (.164)							.178	.168			.330			
5		10 (.190)			.227				.203	.193						
6	24	2 (.086)	.740	.126	.133	.028/.022	.215/.190	.033/.027	.098	.090	.070	.033/.027	.210	.133	YELLOW	BLUE
7		4 (.112)	.786		.171				.122	.114			.260	.193		
8		6 (.138)	.886		.202				.152	.142				.245		
9		8 (.164)							.178	.168			.330			
10		10 (.190)			.227				.203	.193						
70	22	2 (.086)	.790	.156	.115	.037/.029	.215/.190	.070/.034	.098	.090	.080	.039/.034	230	.198	RED	GREEN
11		4 (.112)	.801		.125				.122	.114				.210		
12		6 (.138)							.152	.142			.260	.245		
13		6 (.138)	.911		.202											
14		8 (.164)	.956						.178	.168			.320	.305		
15		10 (.190)			.234				.203	.193						
16		1/4 (.250)	1.136		.265				.275	.260			.473	.450		
17		5/16 (.312)			.296				.338	.323						
18		3/8 (.375)	1.366		.328				.400	.385			.540	.520		
19		1/2 (.500)			.453				.525	.510			.720	.705		
71	20	2 (.086)	.790	.156	.115	.037/.029	.215/.190	.070/.042	.098	.090	.090	.048/.042	230	.198	RED	RED
20		4 (.112)	.801		.125				.122	.114				.210		
21		6 (.138)							.152	.142			.260	.245		
22		6 (.138)	.911		.202											
23		8 (.164)	.956						.178	.168			.320	.305		
24		10 (.190)			.234				.203	.193						
25		1/4 (.250)	1.136		.265				.275	.260			.473	.450		
26		5/16 (.312)			.296				.338	.323						
27		3/8 (.375)	1 366		.328				.400	.385			.540	.520		
28		1/2 (.500)			.453				.525	.510			.720	.705		
72	18	2 (.086)	.790	.156	.115	.037/.029	.215/.190	.070/.052	.098	.090	.100	.056/.052	230	.198	RED	WHITE
29		4 (.112)	.801		.125				.122	.114				.210		
30		6 (.138)							.152	.142			.260	.245		
31		6 (.138)	.911		.202											
32		8 (.164)	.956						.178	.168			.320	.305		
33		10 (.190)			.234				.203	.193						
34		1/4 (.250)	1.136		.265				.275	.260			.473	.450		
35		5/16 (.312)			.296				.338	.323						
36		3/8 (.375)	1.366		.328				.400	.385			.540	.520		
37		1/2 (.500)			.453				.525	.510			.720	.705		
38	16	4 (.112)	.820	.156	.125	.037/.029	.240/.210	.090/.059	.122	.114	.110	.063/.059	.260	.240	BLUE	BLUE
39		6 (.138)							.152	.142						
40		6 (.138)	.956		.202								.317	.302		
41		8 (.164)							.178	168						
42		10 (.190)	.961		.234				.203	.193						
43		1/4 (.250)	1.131		.265				.275	.260			.473	.450		
44		5/16 (.312)			.296				.338	.323						
45		3/8 (.375)	1.271		.328				.400	.385			.540	.520		
46		1/2 (.500)	1.366		.453				.525	.510			.720	.705		
47	14	4 (.112)	.820	.156	.125	.037/.029	.240/.210	.090/.074	.122	.114	.130	.078/.074	.260	.240	BLUE	GREEN
48		6 (.138)							.152	.142						
49		6 (.138)	.956		.202								.317	.302		
50		8 (.164)							.178	.168						
51		10 (.190)	.961		.234				.203	.193						
52		1/4 (.250)	1.131		.265				.275	.260			.473	.450		
53		5/16 (.312)			.296				338	.323						
54		3/8 (.375)	1.271		.328				.400	.385			.540	.520		
55		1/2 (.500)	1.366		.453				.525	.510			.720	.705		
56	12	6 (.138)	1.198	.234	.202	.043/.037	.300/.275	.135/.091	.152	.142	150	.095/.091	.380	.365	YELLOW	YELLOW
57		8 (.164)			.234				.178	.168						
58		10 (.190)							.203	.193						
59		1/4 (.250)	1.400		.265				.275	.260			.536	.516		
60		5/16 (.312)			.296				.338	.323						
61		3/8 (.375)	1.492		.328				.400	.385			.598	.573		
62		1/2 (.500)			.453				.525	.510			.720	.705		

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:37Z
Check the source to verify that this is the current version before use.

TABLE (Continued)

DASH NO.	TERM. SIZE	STUD SIZE	A MAX (D)	B MIN.	C MIN. RAD. (D)	D	E DIA	F DIA	G DIA MAX	G DIA MIN	J MIN DIA	L	W MAX	W MIN	INSUL. SLEEVE COLOR	WIRE SIZE COLOR
63	10	6 (.138)	1.198	.234	.202	.043 / .037	.300 / .275	.135 / .115	.152	.142	.180	.118 / .115	.380	.365	YELLOW	BROWN
64		8 (.164)							.178	.168						
65		10 (.190)			.234				.203	.193						
66		1/4 (.250)	1.400		.265				.275	.260			.536	.516		
67		5/16 (.312)			.296				.338	.323						
68		3/8 (.375)	1.492		.328				.400	.385			.598	.573		
69		1/2 (.500)			.453				.525	.510			.720	.705		

(D) NOTES:

1. DIMENSIONS IN INCHES.
2. METRIC EQUIVALENTS (TO THE NEAREST .01 mm) ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1 INCH = 25.4 mm.
3. REMOVE ALL BURRS AND SHARP EDGES.
4. WIRE INSULATION STOP. DESIGN OPTIONAL.
5. WIRE INSULATION: THIS LUG DESIGN WILL NOT STOP INSULATION WITH A WALL THICKNESS OF LESS THAN .005 INCH.
6. "C" MIN DIMENSIONS IS MIN WASHER CLEARANCE RAD.
7. DIMENSIONS "J" REPRESENTS THE MIN OPENING THAT WILL ACCEPT THE FINISHED WIRE.
8. CONTOUR INDICATED BY PHANTOM LINES MAY VARY FROM THAT SHOWN TO SUIT INDIVIDUAL MANUFACTURER'S DESIGN.
9. INSULATION SUPPORT AND TERMINAL BARREL MAY BE MULTIPLE PIECE CONSTRUCTION.
10. WIRE INSERTION SHALL BE FACILITATED BY BELL MOUTH.

Custodians:
Navy - AS
Army - ER
Air Force - 85

Review activities:
Navy - SH, EC
Army - MI
Air Force - 11, 99
DOD - NS

User activities:
Army - AV
Navy - MC, OS

Preparing activity:
Navy - AS

(Project No. 5940-0889)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:37Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Lakehurst, New Jersey 08733

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Engineering Specifications and Standards
Department (Code 93)
Naval Air Engineering Center
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:37Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-T-7928/1D Terminal, Lug, Crimp Style, Copper, Insulated, Ring Tongue, for thin wall wire, Type II Class 1 for 105° Total conductor Temperature.

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:37Z
Check the source to verify that this is the current version before use.