
MIL-T-7928/2C
8 June 1981
SUPERSEDING
MIL-T-7928/2B
30 November 1972

MILITARY SPECIFICATION SHEET

TERMINALS, LUG AND SPLICES, CONDUCTOR, CRIMP STYLE, COPPER, INSULATED, RECTANGULAR TONGUE, FOR THIN WALL WIRE, TYPE II CLASS 1 FOR 105°C TOTAL CONDUCTOR TEMPERATURE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the terminal described herein shall consist of this document and the issue in effect of Specification MIL-T-7928.

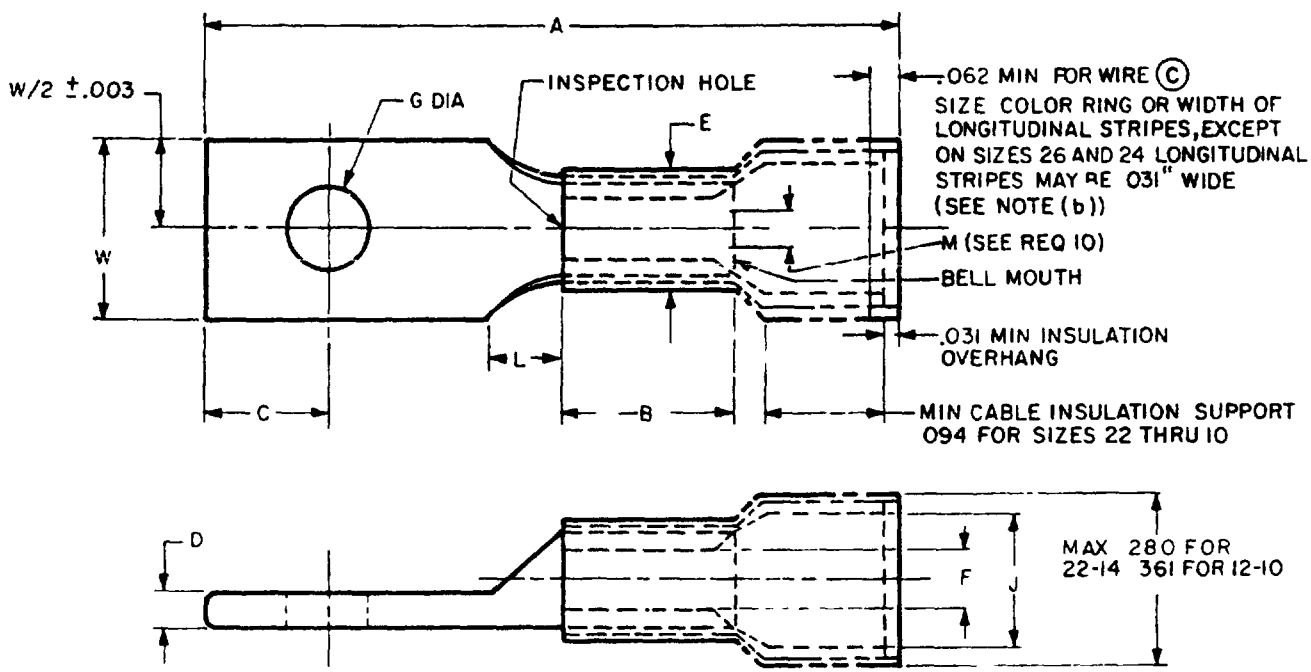

NOTES.

(a) DIMENSIONS IN INCHES.

(b) THE COLOR RING MUST COVER A MINIMUM OF 315° OF THE CIRCUMFERENCE. IN LIEU OF THE WIRE SIZE COLOR RING, 3 OR MORE LONGITUDINAL STRIPES EQUALLY SPACED ON THE INSULATION PORTION OF THE TERMINAL MAY BE USED. THE STRIPES MUST EXTEND TO WITHIN 1/16" OF THE ENDS OF THE INSULATION AND MUST NOT OBLITERATE THE BASIC SLEEVE COLOR.

Ⓒ DENOTES CHANGES

FSC 5940

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. MATERIALS: SEE ACQUISITION SPECIFICATION.

2. FINISH: SEE ACQUISITION SPECIFICATION.

3. REMOVE ALL BURRS AND SHARP EDGES.

4. CONTOUR INDICATED BY PHANTOM LINES MAY VARY FROM THAT SHOWN TO SUIT INDIVIDUAL MANUFACTURER'S DESIGN.

5. INSULATION SUPPORT AND TERMINAL BARREL MAY BE MULTIPLE-PIECE CONSTRUCTION.

6. WIRE INSERTION SHALL BE FACILITATED BY BELL MOUTH.

7. AVERAGE DIAMETER OF "E" AND "F" MUST BE WITHIN SPECIFICATION DIMENSIONS.

(C) 8. QUALIFICATION: FOR QUALIFICATION TESTING ONLY. TERMINALS SHALL BE TESTED WITH ANYONE OF THE FOLLOWING WIRES - MIL-W-22759/9 OR 11 OR MIL-W-81381/1, 3 OR 7 AND TOOLING AS FOLLOWS: MIL-C-22520/5-01 TOOLING WITH MIL-C-22520/5-100 OR 105 DIES INSTALLED FOR SIZES 22 THRU 14 TERMINALS AND MIL-C-22520/5-100 OR 104 DIES INSTALLED FOR SIZES 12 THRU 10 TERMINALS; OR MIL-C-22520/10-01 TOOLING WITH MIL-C-22520/10-101 DIES INSTALLED FOR SIZES 22 THRU 14 TERMINALS AND MIL-C-22520/10-100 DIES INSTALLED FOR SIZES 12 THRU 10 TERMINALS. EXISTING MS90413 AND MS3316 TOOLS IN THE FIELD MAY BE USED UNTIL WORN OUT.

9. COLORS: WIRE SIZE COLOR SHALL BE IN ACCORDANCE WITH EIA STANDARD RS-359. THERE SHALL BE A DISTINCT CONTRAST BETWEEN THE INSULATION SLEEVE COLOR AND THE WIRE SIZE COLOR.

10. WIRE INSULATION STOP. DESIGN OPTIONAL.

11. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE, LETTER "M", SPECIFICATION SHEET NUMBER, AND DASH NUMBER.
EXAMPLE OF PART NUMBER:

M7928/2-6	TERMINAL FOR SIZE 22 WIRE WITH A NO. 8 STUD HOLE.

12. WIRE INSULATION: THIS LUG DESIGN WILL NOT STOP INSULATION WITH A WALL THICKNESS OF LESS THAN .005 INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:37Z
Check the source to verify that this is the current version before use.

TABLE I

DASH NO	WIRE SIZE	STUD SIZE	A MAX	B MAX	C ± .010	D	F DIA	F DIA	G DIA MAX	G DIA MIN	I MIN DIA	I MAX	M	W ± .005	INSUL SLEEVE COLOR	WIRE SIZE COLOR	TONGUE SHAPE REF ONLY	NAVY TERMINAL AND WIRE SIZE (REF ONLY)
1	22	4 (.112)	.842	.156	.143	.037/.029	.215/.190	.070/.034	.137	.129	.090	.125	.039/.034	.237	RED	GREEN	L86P-1	1-2
2		4 (.112)	1.061		.195							.156					L85P-1	
3		5 (.125)	.905		.143							.125		.277			L83P-1	
4		6 (.138)	1.061		.195				.157	.142		.156		.237			L84P-1	
5		6 (.138)	1.155		.227							.250		.302			L81P-1	
6		8 (.164)							.178	.168							L82P-1	
7		8 (.164)	1.405		.310							.281		.390			L80P-1	
8	20	4 (.112)	.842	.156	.143	.037/.029	.215/.190	.070/.043	.122	.114	.090	.125	.048/.042	.237	RED	RED	L86P-1	1-2
9		4 (.112)	1.061		.195							.156					L85P-1	
10		5 (.125)	.905		.143				.137	.129		.125		.277			L83P-1	
11		6 (.138)	1.061		.195				.152	.142		.156		.237			L84P-1	
12		6 (.138)	1.155		.227							.250		.302			L81P-1	
13		8 (.164)							.178	.168							L82P-1	
14		8 (.164)	1.405		.310							.281		.390			L80P-1	
15	18	4 (.112)	.842	.156	.143	.037/.029	.215/.190	.070/.052	.122	.114	.100	.125	.056/.050	.237	RED	WHITE	L86P-1	1-2
16		4 (.112)	1.061		.195							.156					L85P-1	
17		5 (.125)	.905		.143				.137	.129		.125		.277			L83P-1	
18		6 (.138)	1.061		.195				.157	.142		.156		.237			L84P-1	
19		6 (.138)	1.155		.227							.250		.302			L81P-1	
20		8 (.164)							.178	.168							L82P-1	
21		8 (.164)	1.405		.310							.281		.390			L80P-1	
22	16	4 (.112)	.842	.156	.143	.037/.039	.240/.210	.090/.059	.122	.114	.110	.125	.063/.059	.237	BLUE	BLUE	L86P-2	2 1/2-4
23		4 (.112)	1.061		.195							.156					L85P-2	
24		5 (.125)	.905		.143				.137	.129		.125		.277			L83P-2	
25		6 (.138)	1.061		.195				.157	.142		.156		.237			L84P-2	
26		6 (.138)	1.155		.227							.250		.302			L81P-2	
27		8 (.164)							.178	.168							L82P-2	
28		8 (.164)	1.405		.310							.281		.390			L80P-2	
29	14	4 (.112)	.842	.156	.143	.037/.039	.240/.210	.090/.074	.122	.114	.130	.125	.078/.074	.237	BLUE	GREEN	L86P-2	2 1/2-4
30		4 (.112)	1.061		.195							.156					L85P-2	
31		5 (.125)	.905		.143				.137	.129		.125		.277			L83P-2	
32		6 (.138)	1.061		.195				.157	.142		.156		.237			L84P-2	
33		6 (.138)	1.155		.227							.250		.302			L81P-2	
34		8 (.164)							.178	.168							L82P-2	
35		8 (.164)	1.405		.310							.281		.390			L80P-2	
36	12	4 (.112)	1.061	.234	.143	.046/.043	.300/.275	.135/.091	.122	.114	.150	.125	.095/.091	.237	YELLOW	YELLOW	L86P-3	6-9
37		4 (.112)	1.281		.195							.156					L85P-3	
38		5 (.125)	1.124		.143				.137	.129		.125		.277			L83P-3	
39		6 (.138)	1.281		.195				.157	.142		.156		.237			L84P-3	
40		6 (.138)	1.359		.227							.250		.302			L81P-3	
41		8 (.164)							.178	.168							L82P-3	
42		8 (.164)	1.609		.310							.281		.390			L80P-3	
43	10	4 (.112)	1.061	.234	.143	.046/.043	.300/.275	.135/.115	.122	.114	.180	.125	.118/.115	.237	YELLOW	BROWN	L86P-3	6-9
44		4 (.112)	1.281		.195							.156					L85P-3	
45		5 (.125)	1.124		.143				.137	.129		.125		.277			L83P-3	
46		6 (.138)	1.281		.195				.157	.142		.156		.237			L84P-3	
47		6 (.138)	1.359		.227							.250		.302			L81P-3	
48		8 (.164)							.178	.168							L82P-3	
49		8 (.164)	1.609		.310							.281		.390			L80P-3	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:37Z
Check the source to verify that this is the current version before use.

Metric Table

INCH	mm	INCH	mm	INCH	mm	INCH	mm
.029	0.74	.090	2.29	.150	3.81	.281	7.14
.031	0.79	.091	2.31	.152	3.86	.300	7.62
.034	0.86	.094	2.39	.156	3.96	.302	7.67
.035	0.89	.095	2.41	.164	4.17	.310	7.87
.037	0.94	.100	2.54	.168	4.27	.361	9.17
.039	0.99	.110	2.79	.178	4.52	.390	9.91
.042	1.07	.112	2.84	.180	4.57	.842	21.39
.046	1.17	.114	2.90	.190	4.83	.905	22.99
.048	1.22	.115	2.92	.195	4.95	1.061	26.95
.052	1.32	.118	3.00	.210	5.33	1.062	26.97
.056	1.42	.122	3.10	.215	5.46	1.124	28.55
.059	1.50	.125	3.18	.227	5.77	1.155	29.34
.062	1.57	.129	3.28	.234	5.94	1.281	32.54
.063	1.60	.130	3.30	.237	6.02	1.359	34.52
.070	1.78	.135	3.43	.240	6.10	1.405	35.69
.074	1.88	.137	3.48	.250	6.35	1.609	40.87
.078	1.98	.138	3.51	.275	6.99		
.080	2.03	.142	3.61	.277	7.04		
.086	2.18	.143	3.63	.280	7.11		

Custodians:
Navy - AS
Army - ER
Air Force - 99

Review activities:
Navy - SH, EC
Army - MI
Air Force - 11
DOD - NS

User activities
Army - AV
Navy - MC, OS

Preparing activity:
Navy - AS
(Project No. 5940-0930)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:37Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-T-7928/2C Terminals, Lug and Splices, Conductor, Crimp Style, Copper, Insulated, Rectangular Tongue, for Thin Wall Wire, Type II Class 1 for 105°C Total Conductor Temperature.

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used

S/N 0102 LF 001 4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:37Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STA

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Engineering Specifications and Standards Dept
(Code 93)
Naval Air Engineering Center
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:37Z
Check the source to verify that this is the current version before use.