
MILITARY SPECIFICATION SHEET

Terminal Lug and Splices, Conductor, Crimp Style, Copper

Terminal Lug, Crimp Style, Copper, Uninsulated, Ring Tongue
Type I, Class 1
For 175°C Total Conductor Temperature

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the terminals described herein shall consist of this document and the latest issue of specification MIL-T-7928.

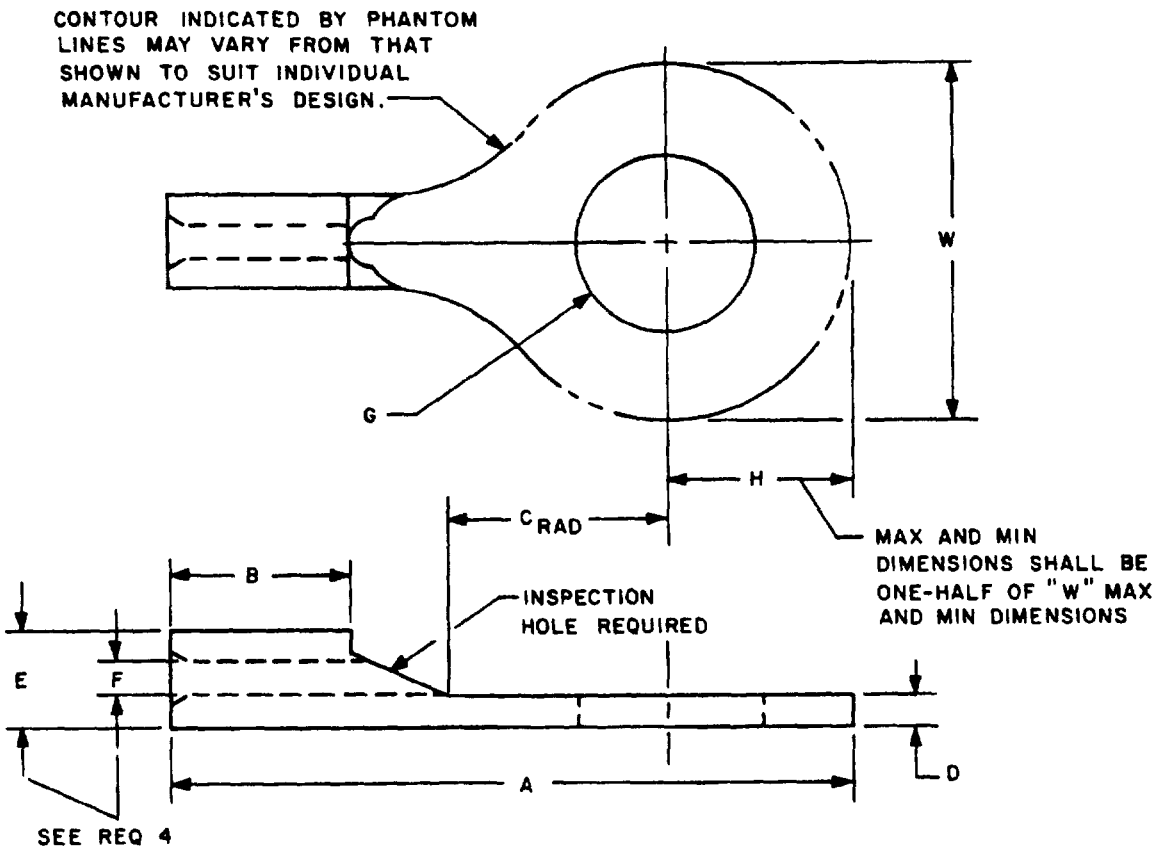

FSC 5940

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:38Z
Check the source to verify that this is the current version before use.

TABLE I

Dash No.	Wire Size	Stud Size	A Max.	B Min.	C Min. Rad.	D Max.	D Min.	E Dia.	F Dia.	G Max.	G Min.	W Max.	W Min.	MIL-T-16366 (SHIPS) Reference
-1	22-18	2 (.086)	.560	.240	.115	.037	.023	.165/.110	.070/.052	.098	.090	.230	.198	1-2
-2		4 (.112)								.122	.114			
-3		6 (.138)	.747		.200					.152	.142	.320	.275	L33, 1-2
-4		10 (.190)	.747		.200					.203	.193	.320	.275	L36, 1-2
-5		5/16 (.3125)	.953		.312					.338	.323	.540	.450	L65, 1-2
-6		3/8 (.375)	1.125		.380					.400	.385	.609	.520	L66, 1-2
-7	16-14	6 (.138)	.747		.200			.192/.139	.098/.081	.152	.142	.320	.275	L33, 2-1/2-4
-8		10 (.190)	.747		.200					.203	.193	.320	.275	L36, 2-1/2-4
-9		5/16 (.3125)	.953		.312					.338	.323	.540	.450	L65, 2-1/2-4
-10		3/8 (.375)	1.125		.380					.400	.385	.609	.520	L66, 2-1/2-4
-11		4 (.112)	.560		.115					.122	.114	.250	.240	2-1/2-4

Source: https://standards.iteh.ai/catalog/standards/sist/... Downloaded: 2026-10-17T09:38Z
Check the source to verify that this is the current version before use.

Requirements:

1. Material: Soft copper, QQ-C-502, Class A
   Copper tubing, ASTM B75-68
   Gilding Metal, 95 percent copper, 5 percent zinc.

2. Finish: Tin plated. See acquisition specification.

3. Qualification testing: For qualification, terminals shall be tested with any one of the following wires: MIL-W-22759/1, 9 or 11 or MIL-W-81381/1, 3 or 7, and tooling as follows: MIL-C-22520/24 hand crimping tool. MIL-C-915 and MIL-C-2194 cables may be used with MIL-C-22520/25 or MIL-C-22520/24 hand crimping tool.

4. Average diameter of "E" and "F" dimensions must be within qualification dimensions. Max and min. dimensions due to ovalization must be within 3% of specification requirements.

5. Where split barrel construction is used, the split shall be permanently sealed and shall not open as a result of crimping.

6. Part number. The part numbers shall consist of the letter "M", specification sheet number, and dash number.

   Example of Part Number: M7928/7-2 terminal fit size 22-18 wire with 0.190 stud size hole.

Notes:

1. Dimensions in inches.

2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

Table II (Ref)

Size	Navy Cable Size	
22-18	1	(1)
	1	(7)
	1	(10)
	1 - 1/2	(1)
	1 - 1/2	(7)
	1 - 1/2	(16)
	1 - 1/2	(41)
	2	(7)
16-14	2 - 1/2	(1)
	2 - 1/2	(19)
	2 - 1/2	(26)
	3	(7)
	4	(1)
	4	(19)
	4	(7)
	4	(41)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:38Z
Check the source to verify that this is the current version before use.

TABLE III

Inch	mm	Inch	mm	Inch	mm
.023	0.58	.165	4.19	.320	8.13
.037	0.94	.170	4.32	.323	8.20
.052	1.32	.190	4.83	.338	8.59
.070	1.78	.192	4.88	.375	9.53
.081	2.06	.193	4.90	.380	9.65
.086	2.18	.198	5.03	.385	9.78
.090	2.29	.200	5.08	.400	10.16
.098	2.49	.203	5.16	.450	11.43
.110	2.79	.213	5.41	.520	13.21
.112	2.82	.223	5.66	.528	13.41
.114	2.90	.230	5.84	.540	13.72
.115	2.92	.240	6.10	.560	14.22
.122	3.10	.245	6.22	.609	15.47
.138	3.51	.250	6.35	.747	18.97
.139	3.53	.255	6.48	.953	24.21
.142	3.61	.275	6.99	1.125	28.58
.152	3.86	.312	7.92		
.156	3.96	.3125	7.94		

Custodians:
Army - ER
Air Force - 85

Review Activities:
Navy - SH, EC, OS
Air Force - 99

Preparing Activity:
Navy - AS

User Activity:
Navy - MC
Army - AV

(Project No. 5940-0857)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:38Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-T-7928/7 Terminal Lug, Crimp Style, Copper, Uninsulated, Ring Tongue Type I, Class 1 for 175°C Total Conductor Temperature.

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used

S/N 0102-LF-001 4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:38Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Lakehurst, New Jersey 08733

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Engineering Specifications and Standards
Department (Code 93)
Naval Air Engineering Center
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:38Z
Check the source to verify that this is the current version before use.