

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-N-25027

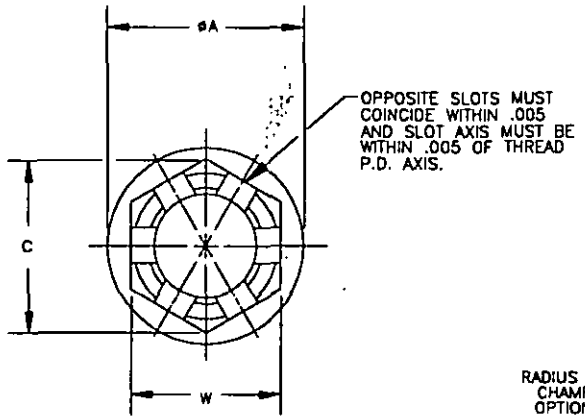

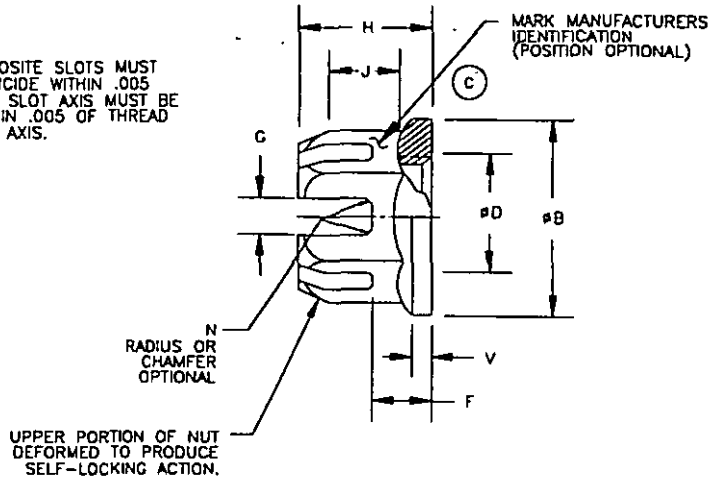

Ⓒ DENOTES CHANGE(S)

INCH-POUND

DASH NUMBER		THREAD	øA	øB	C	øD	F	G		H		J	N	V'	W		ULTIMATE TENSILE STRENGTH LB MIN	WEIGHT LB/100 MAX	COTTER PIN SIZE (REF)
NON DRY LUB	DRY LUB	MIL-S-8879	MAX	MIN	MIN	MAX	+.016	MAX	MIN	MAX	MIN	MIN	MAX	REF	MAX	MIN			
3	L3	.1900-32UNJF-3B	.325	.291	.277	.220	.109	.065	.050	.265	.235	.150	.035	.025	.252	.243	2,460	.20	3/64
4	L4	.2500-28UNJF-3B	.420	.386	.348	.280	.125	.100	.070	.296	.266	.175	.035	.025	.315	.305	4,580	.34	1/16
5	L5	.3125-24UNJF-3B	.520	.482	.419	.342	.172	.100	.070	.343	.313	.200	.035	.055	.378	.387	7,390	.57	1/16
6	L6	.3750-24UNJF-3B	.579	.539	.480	.405	.219	.155	.125	.421	.391	.250	.053	.070	.440	.429	11,450	.88	3/32
7	L7	.4375-20UNJF-3B	.645	.600	.552	.467	.266	.155	.125	.468	.438	.300	.053	.070	.504	.492	15,450	1.20	3/32
8	L8	.5000-20UNJF-3B	.770	.725	.623	.530	.359	.155	.125	.578	.548	.400	.053	.070	.568	.554	21,110	1.90	3/32
9	L9	.5625-18UNJF-3B	.850	.815	.765	.592	.391	.186	.156	.624	.594	.475	.062	.080	.692	.678	26,810	3.30	1/8
10	L10	.6250-18UNJF-3B	.910	.875	.836	.655	.469	.186	.156	.734	.704	.550	.062	.090	.755	.741	34,130	4.30	1/8
12	L12	.7500-16UNJF-3B	1.130	1.095	.978	.785	.563	.186	.156	.828	.798	.625	.062	.100	.880	.865	50,020	6.00	1/8
14	L14	.8750-14UNJF-3B	1.345	1.300	1.121	.910	.656	.186	.156	.921	.891	.675	.062	.120	1.006	.990	68,440	10.00	1/8
16	L16	1.0000-12UNJF-3B	1.545	1.500	1.263	1.035	.750	.186	.156	1.015	.985	.750	.062	.120	1.132	1.115	90,000	14.00	1/8
18	L18	1.1250-12UNJF-3B	1.745	1.700	1.414	1.160	.813	.186	.156	1.171	1.141	.875	.062	.140	1.257	1.239	116,700	19.00	1/8
20	L20	1.2500-12UNJF-3B	1.915	1.875	1.556	1.285	.875	.186	.156	1.265	1.235	.950	.062	.140	1.383	1.364	147,940	24.00	1/8

Form Approved OMB No. 0704-0188

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

PREPARING ACTIVITY: DLA-IS
CUSTODIANS: ARMY-AV NAVY-AS
AIR FORCE-99 DLA-
REVIEW:
USER:
PROJECT NUMBER: 5310-2030
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

MILITARY SPECIFICATION SHEET
TITLE
NUT, SELF-LOCKING, LIGHTWEIGHT, CASTELLATED, 450°F.

SPECIFICATION SHEET NUMBER
MS14144 31 OCT 94 REV C
SUPERSEDING MS14144 B 15 SEP 93
AMSC- N/A FSC 5310

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:35Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-N-25027

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form Approved
OMB No. 0704-0188

(C) REQUIREMENTS:

1. MATERIAL: STEEL UNS G10350 (AISI C1035) PER AMS 5080, QQ-S-700
   UNS G10420 (AISI C1042)
   UNS G10500 (AISI 1050) PER AMS 5085
   UNS G11370 (AISI 1137) PER AMS 5024
   UNS G11374 (AISI 11L37) PER AMS 5020
   UNS G40270 (AISI 4027) PER ASTM A322
   UNS G40370 (AISI 4037) PER ASTM A322, A331, A519, A547
   UNS G87400 (AISI 8740) PER AMS 6322, AMS 6323, AMS 6325, AMS 6327, AMS 6358

2. PLATING: STEEL NUTS (WITHOUT DRY FILM LUBRICANT) CADMIUM PLATED IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 2. DRY FILM LUBRICATED STEEL NUTS IN ACCORDANCE WITH QQ-P-416, TYPE AND CLASS OPTIONAL IF NUTS MEET THE SALT SPRAY REQUIREMENTS OF QQ-P-416 TYPE II.

3. SURFACE TEXTURE: IN ACCORDANCE WITH AISI/ASME B46.1 SHALL NOT EXCEED 125 MICROINCHES.

4. LUBRICANT: LUBRICANT APPROVED IN ACCORDANCE WITH MIL-N-25027. LUBRICANTS, EXCEPT DRY FILM LUBRICANTS, SHALL BE SOLUBLE IN THE CLEANER SPECIFIED IN THE PROCUREMENT SPECIFICATION. FOR USAF APPLICATIONS NUTS TREATED WITH DRY FILM LUBRICANTS SHALL NOT BE UTILIZED IN INTEGRAL FUEL TANKS.

5. THREADS: IN ACCORDANCE WITH MIL-S-8879 BEFORE LUBRICATION.

6. EDGES: BREAK ALL SHARP EDGES AND REMOVE ALL BURRS AND SLIVERS.

7. PERFORMANCE: MIL-N-25027 EXCEPT LOCKING TORQUE VALUES APPLICABLE FOR 5 CYCLES.

(C) 8. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER PLUS A DASH NUMBER.

EXAMPLE: MS14144 -4
DASH NUMBER
BASIC MS NUMBER

MS14144 L4 - .2500-28 NUT, CADMIUM PLATED, DRY FILM LUBRICATED.
MS14144-4 - .2500-28 NUT, CADMIUM PLATED, SOLUBLE LUBRICANT.

(C) NOTES:

1. DIMENSIONS IN INCHES.

2. DESIGN INFORMATION: THESE NUTS MAY BE USED AT TEMPERATURES 450°F AND BELOW IN THOSE TYPES OF APPLICATIONS FOR WHICH SLOTTED OR CASTELLATED NUTS ARE APPROVED FOR USE, AND IF SUCH APPLICATIONS CONFLICT WITH ANY LIMITATIONS ON THE USE OF SELF-LOCKING NUTS, AS CITED BY MS33588, THIS STANDARD TAKES PRECEDENCE. NUTS ARE TO BE INSTALLED IN ACCORDANCE WITH MS33540.

3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS DOCUMENT AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS DOCUMENT SHALL TAKE PRECEDENCE.

4. UNLESS OTHERWISE SPECIFIED, ISSUES OF REFERENCED DOCUMENTS ARE THOSE IN EFFECT AT THE TIME OF THE SOLICITATION.

5. BIDS SHALL BE SOLICITED ONLY FROM THE MANUFACTURERS OR DISTRIBUTORS LISTED ON QPL-25027.

PREPARING ACTIVITY: DLA-IS CUSTODIANS: ARMY-AV NAVY-AS AIR FORCE-99 DLA- REVIEW: USER: PROJECT NUMBER: 5310-2030	MILITARY SPECIFICATION SHEET TITLE NUT, SELF-LOCKING, LIGHTWEIGHT, CASTELLATED, 450°F.	SPECIFICATION SHEET NUMBER MS14144 31 OCT 94 REV C SUPERSEDING MS14144 B 13 SEP 93 AMSC- N/A FSC 5310
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.		Page 2 of 2

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:35Z
Check the source to verify that this is the current version before use.