K-03-19

FED SUP CLASS
3110

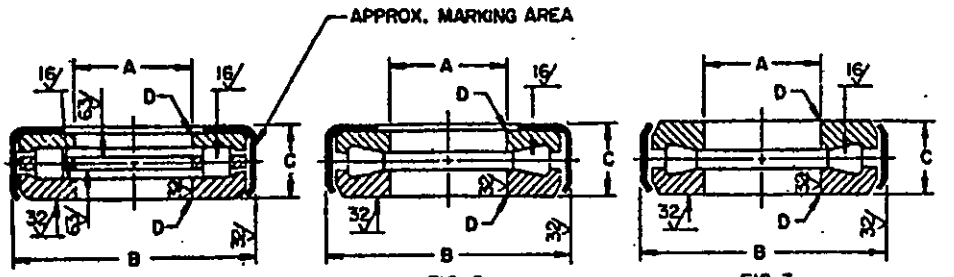


FIG. 1
RETAINER TYPE
STEERING GEAR SERVICE

FIG. 2
RETAINERLESS TYPE
INTERMITTENT OPERATION
50 R.P.M. MAX.

FIG. 3

A			B		C	D	FIG NO.	BEARING NUMBER			
	TOLERANCE							WITHOUT OIL HOLES IN O.D. BAND		WITH OIL HOLES IN O.D. BAND	
BORE INCH	+	−	OUTSIDE DIA. INCH	TOL −.000	HEIGHT ±.005 INCH	RADIUS OR CHAMFER		MIL-STD-102 CODE NUMBER	DASH NO.	MIL-STD-102 CODE NUMBER	DASH NO.
.6350	.004	.003	1.6250	+.010	.5000	.031 R	1	994 x 73038 x 0000	1		
.7600	.004	.002	1.6250	+.010	.5310	.031 R	1	994 x 73001 x 0000	2		
.8220	.006	.000	1.6250	+.010	.5310	.031 R	1	994 x 73005 x 0000	3		
.8220	.006	.000	1.6600	+.010	.5310	.031 x 45°	1	994 x 73023 x 0000	4		
.8850	.004	.002	1.8906	+.010	.5940	.031 R	1	994 x 73006 x 0000	5		
.9470	.004	.002	1.8906	+.010	.5940	.031 R	1	994 x 73034 x 0000	6		
1.0100	.004	.004	2.0000	+.010	.6250	.031 R	1	994 x 73002 x 0000	7		
1.0720	.004	.004	2.0000	+.010	.6250	.031 R	1	994 x 73021 x 0000	8		
1.1340	.004	.004	2.1875	+.010	.6250	.031 R	1	994 x 73003 x 0000	9		
1.1975	.004	.004	2.1875	+.010	.6250	.031 R	1	994 x 73020 x 0000	10		
1.2600	.004	.004	2.1875	+.010	.6250	.031 R	1	994 x 73004 x 0000	11	994 x 73029 x 0000	39
1.2600	.000	.005	2.6250	+.005	.7656	.031 x 45°	2	994 x 73007 x 0000	12		
1.3850	.000	.005	2.6250	+.005	.7656	.031 x 45°	2	994 x 73008 x 0000	13		
1.4470	.000	.005	2.6250	+.005	.7656	.031 x 45°	2	994 x 73025 x 0000	14	994 x 73009 x 0000	42
1.5100	.000	.005	2.8590	+.005	.8438	.031 x 45°	2	994 x 73022 x 0000	15	994 x 73042 x 0000	43
1.5730	.000	.005	2.8590	+.005	.8438	.031 x 45°	2	994 x 73036 x 0000	16		
1.6350	.000	.005	2.8590	+.005	.8438	.031 x 45°	2	994 x 73010 x 0000	17		
1.7600	.000	.005	3.2660	+.005	.9375	.031 x 45°	2	994 x 73011 x 0000	18	994 x 73012 x 0000	46
1.9470	.002	.002	3.6720	+.005	1.0313	.031 x 45°	3	994 x 73030 x 0000	19		
1.9470	.002	.002	3.6720	+.005	1.0620	.031 x 45°	2	994 x 73013 x 0000	20		
2.0100	.002	.002	3.6720	+.005	1.0313	.125 R	3	994 x 73014 x 0000	21	994 x 73043 x 0000	49
2.0100	.002	.002	3.6720	+.005	1.0625	.125 R	2	994 x 73015 x 0000	22	994 x 73016 x 0000	50
2.0720	.002	.002	3.6720	+.005	1.0620	.031 x 45°	2		23	994 x 73037 x 0000	51
2.0720	.002	.002	3.6720	+.005	1.0310	.031 x 45°	3	994 x 73031 x 0000	24		
2.5100	.002	.002	4.3750	+.005	1.0625	.031 x 45°	2	994 x 73028 x 0000	25	994 x 73026 x 0000	53
2.5100	.002	.002	4.3750	+.005	1.0156	.031 x 45°	3		26	994 x 73017 x 0000	54
3.0100	.002	.002	5.2500	+.008	1.3125*	.093 R	3	994 x 73018 x 0000	27		
3.0100	.002	.002	5.2500	+.008	1.3750*	.093 R	2	994 x 73027 x 0000	28		

* TOL = +.000, −.008
LOAD RATINGS SHOWN ON SHEET 2.

(A) ENTIRE STANDARD REVISED

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

REVIEW ACTIVITIES: ARMY-WC
USER ACTIVITIES: ARMY-MI; NAVY-YD, MC

APPROVED 28 JUNE 1960 REVISED (A) 20 FEBRUARY 1968

P.A	TITLE	MILITARY STANDARD
ARMY-AT Other Cust AF-11	BEARING, ROLLER, THRUST, TWO CHANNELED RACE SURFACE, RIGID OR FLAT SEAT TYPE	MS 17169
PROCUREMENT SPECIFICATION: NONE	SUPERSEDES	SHEET 1 OF 2

DD Form 672-1 (Coordinated)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:04Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
3110

LOAD RATINGS

RETAINER TYPE			RETAINERLESS TYPE		
BEARING DASH NUMBER	FIGURE NUMBER	STEERING PIVOT RATING POUNDS	BEARING DASH NUMBER	FIGURE NUMBER	INTERMITTENT OPERATION RATING 50 RPM MAX. POUNDS
1	1	2450	12	2	7450
2	1	2450	13	2	7450
3	1	2450	14 AND 42	2	7450
4	1	2765	15 AND 43	2	8320
5	1	3840	16	2	8320
6	1	3840	17	2	8320
7	1	4125	18 AND 46	2	11345
8	1	4125	19	3	15485
9	1	4415	20	2	15485
10	1	4415	21 AND 49	3	15485
11 AND 39	1	4415	22 AND 50	2	15485
			23 AND 51	2	15485
			24	3	15485
			25 AND 53	2	21650
			26 AND 54	3	21650
			27	3	31455
			28	2	31455

FOR DIMENSIONAL AND OTHER PERTINENT DATA, SEE SHEET 1.

NOTES:

1. MATERIAL:
   STEEL, ALLOY, HIGH CARBON CHROMIUM, TYPE AISI E51100 OR TYPE AISI E52100, FEDERAL STD. NO. 66
2. HEAT TREAT:
   BEARING SHALL BE THROUGH HARDENED TO ROCKWELL C 58 TO C 66.
3. SURFACE FINISH:
   SURFACES MARKED ✓ SHALL HAVE SURFACE FINISH IN ACCORDANCE WITH USAS B46.1
4. BEARING SHALL BE FREE OF ALL DEFECTS WHICH WOULD AFFECT ITS SERVICEABILITY.
5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
7. THE MS PART NUMBER CONSISTS OF THE MS NUMBER, PLUS THE DASH NUMBER. EXAMPLE: MS 17169-1
8. MARKING SHALL CONSIST OF THE MS PART NUMBER AND THE MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

APPROVED 28 JUNE 1960 REVISED (4) ENTIRE STANDARD REVISED

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ARMY—AT Other Cust AF—11	TITLE BEARING, ROLLER, THRUST, TWO CHANNELED RACE SURFACE, RIGID OR FLAT SEAT TYPE	MILITARY STANDARD MS 17169
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 2

DD FORM 672-1 (Continuation)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:04Z
Check the source to verify that this is the current version before use.