NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission, to manufacture, use, or sell any patented invention that may in any way be related thereto.

FSC CLASS
5320

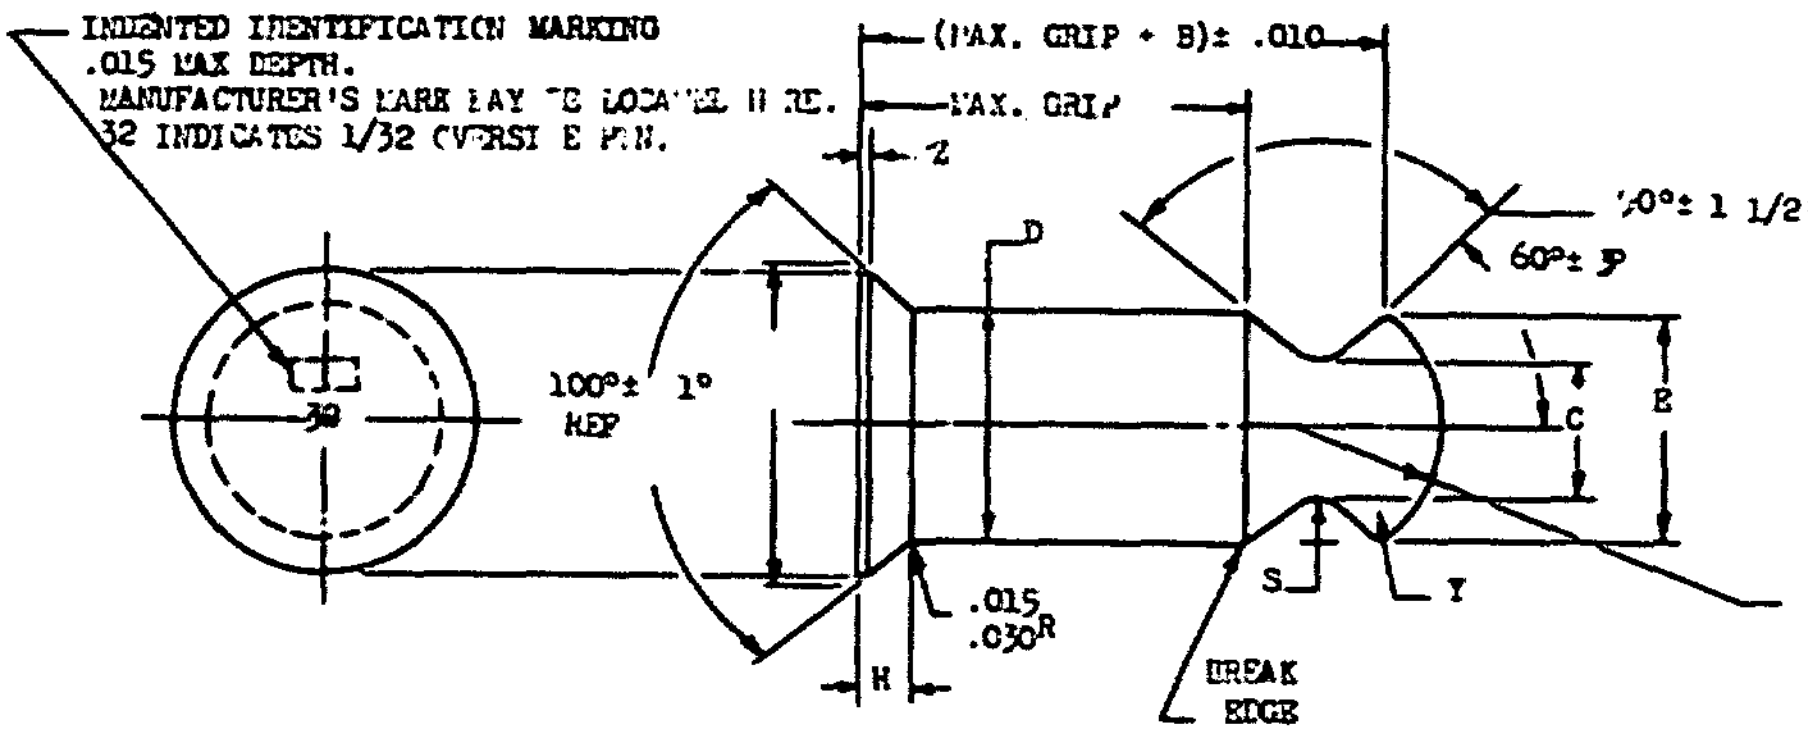
INDENTED IDENTIFICATION MARKING
.015 MAX DEPTH.
MANUFACTURER'S MARK MAY BE LOCATED HERE.
32 INDICATES 1/32 OVERSIZE PIN.
32
(MAX. GRIP + B)± .010
MAX. GRIP
Z
D
100°± 1°
REF
90°± 1 1/2°
60°± 5°
C
B
.015
.030R
H
S
Y
BREAK
EDGE

NOMINAL DIAMETER	A DIA	B	(b) C DIA	D DIA	(b) E DIA	(a) F	(c) H	P SPHER RAD	S RAD	Y MAX RAD	Z
7/32	.3016 .2966	.125	.119 .115	.2197 .2166	.185 .181	.005	.0347 .0327	.128 .113	.034 .030	.0075	.015 .005
9/32	.3948 .3898	.165	.156 .152	.2822 .2811	.245 .241	.006	.0476 .0456	.167 .155	.044 .040	.0075	.015 .005
11/32	.4739 .4689	.206	.194 .189	.3447 .3436	.307 .302	.007	.0546 .0526	.206 .194	.054 .050	.0075	.015 .005
13/32	.5604 .5554	.248	.232 .227	.4072 .4061	.370 .365	.008	.0647 .0627	.250 .237	.066 .062	.0075	.015 .005
15/32	.668 .662	.289	.270 .265	.4697 .4686	.430 .425	.009	.0835 .0810	.295 .280	.077 .073	.0125	.022 .005
17/32	.754 .748	.330	.308 .303	.5322 .5311	.493 .488	.010	.0934 .0909	.337 .322	.089 .085	.0125	.022 .005

NOMINAL DIAMETER	(d) MAX. GRIP LENGTH AND DASH NUMBERS													
	3/16	1/4	5/16	3/8	7/16	1/2	9/16	5/8	11/16	3/4	13/16	7/8	15/16	1
7/32	7-3	7-4	7-5	7-6	7-7	7-8	7-9	7-10	7-11	7-12	7-13	7-14	7-15	7-16
9/32		9-4	9-5	9-6	9-7	9-8	9-9	9-10	9-11	9-12	9-13	9-14	9-15	9-16
11/32			11-5	11-6	11-7	11-8	11-9	11-10	11-11	11-12	11-13	11-14	11-15	11-16
13/32				13-6	13-7	13-8	13-9	13-10	13-11	13-12	13-13	13-14	13-15	13-16
15/32					15-7	15-8	15-9	15-10	15-11	15-12	15-13	15-14	15-15	15-16
17/32						17-8	17-9	17-10	17-11	17-12	17-13	17-14	17-15	17-16

(a) Head edge out of roundness shall not exceed "F".

(b) "C" and "E" shall be concentric with "D" within .004 total runout for 7/32, 9/32, 11/32 and 13/32 sizes; within .005 for 15/32 and 17/32 sizes.

(c) "H" is dimensioned from maximum "D" diameter.

(d) For pins with grip length in excess of 1 inch, code second dash number indicates max. grip in 1/16 increments.

MATERIAL: Steel, Spec. AN-S-9, AN-QQ-S-690, MIL-S-5626, MIL-S-6049, MIL-S-6050, MIL-S-6098 or MIL-S-6758.

HEAT TREAT: 160,000 to 180,000 PSI Spec. MIL-H-6875.

FINISH: Cadmium plate, Spec. QQ-P-416, Type I, Class C.
Roughness of surfaces outside of maximum grip shall not exceed 80 RMS micro inches measured before plating.
Roughness of surfaces within maximum grip shall not exceed 60 RMS micro inches measured before plating.
Conical surface of head and shank to be concentric within .005 full indicator reading.
Example of part no. 409-9-14 • pin, 9/32 dia., 7/8 max. grip length.
409-9-19 • pin, 9/32 dia., 1-3/16 max. grip length.

Dimensions in inches to be met after plating.

NOT FOR DESIGN.
FOR REPLACEMENT PURPOSES ONLY.

REINSTATED 6 JUNE 1966

APPROVED 29 JULY 55 REVISED

CUSTODIAN
Air Force

PROCUREMENT SPECIFICATION
None

MILITARY STANDARD

PIN-100° COUNTERSUNK HEAD, HI-SHEAR, [illegible] 160,000 PSI

MS21001

SHEET [illegible]

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:24Z
Check the source to verify that this is the current version before use.