
PROJECT 5977-F034

FED SUP CLASS
5977

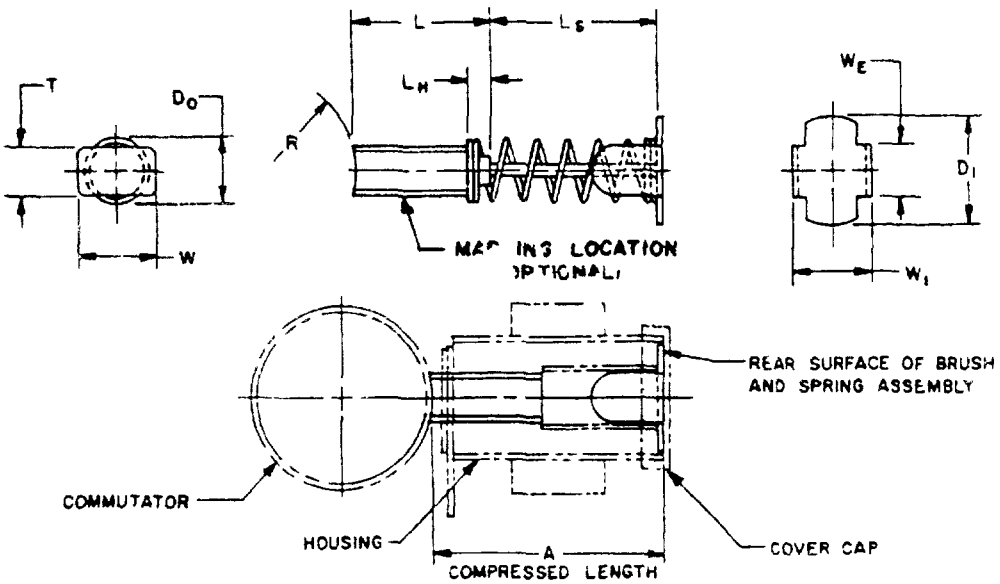

NOTES

1. BRUSH MARKING EACH BRUSH SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-1285, WITH A LINE OR GROOVE INDICATING THE POINT OF 75% WEAR, AND WITH THE GRADE OF BRUSH MATERIAL USED
2. THERE SHALL BE TWO CLOSED TURNS AT EACH END OF THE SPRING
3. ALL BRUSHES SHALL BE CHAMFERED AS FOLLOWS

BRUSH THICKNESS OR WIDTH (WHICHEVER IS SMALLER)	CHAMFER DEPTH
250 OR LESS	$.010^{+.005}_{-.000}$
OVER .250 BUT LESS THAN 375	$.032^{+.016}_{-.000}$
375 TO 625 INCLUSIVE	$.062^{+.032}_{-.000}$

4. ALL SHUNT TERMINALS SHALL BE HOT-TINNED
5. THE MAXIMUM LENGTH OF THE TERMINAL-LUG EARS SHALL NOT EXCEED THE SOLID COMPRESSED LENGTH OF THE SPRING
6. REFERENCED SPECIFICATIONS AND STANDARDS SHALL BE OF THE ISSUE IN EFFECT ON THE DATE OF INVITATION FOR BIDS
7. BRUSH MATERIAL ALTITUDE TREATED CARBON TYPE STACKPOLE CARBON CO No 51
   SPRING MATERIAL BERYLLIUM COPPER PER MIL-C-6941
   SHUNT COPPER BRAIDED PER QQ-W-361A
   CAP, SPRING BRASS PER QQ-B-613 OR COPPER PER QQ-C-530
8. THE SPRING SHALL BE DESIGNED TO GIVE A BRUSH PRESSURE OF $4 lb_f/in^2$ TO $6 lb_f/in^2$ WHEN INSTALLED AS SHOWN THROUGHOUT THE LIFE OF THE BRUSH
9. THE SHUNT SHALL HAVE A MINIMUM CROSS-SECTIONAL AREA OF 1000 CIRCULAR MILS
10. DIMENSIONS IN INCHES

(B) ENTIRE STANDARD REVISED

APPROVED 4 JUNE 1956 REVISED (B) 1 MAY 1976

USER ACTIVITIES

REVIEWER ACTIVITIES
AF 80
09A-G5

This military standard is approved by the AFLC/Engineering and Technical Support Division, Department of the Air Force and shall be used by that activity. All other military activities are required to employ this standard where suitable.

P A	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
AF-85 Other Cust		BRUSH-ELECTRICAL CONTACT, DYNAMOTOR LOW VOLTAGE	MS24220(USAF)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES AF DWG 56C12696		SHEET 1 OF 2

DD FORM 672-1 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:50Z
Check the source to verify that this is the current version before use.

PROJECT 5977-F034

FED SUP CLASS
5977

MS PART NUMBER		A ± 032	L ± 032	W +000 −004	T +000 −004	L_H HEAD LENGTH +016 −000	R RAD ±5%	D_O DIA +000 −008	L_S +125 −000	D_I DIA +000 −008	W_I +000 −008	W_E ±016
MS 24220-1	(a)	1100	656	375	250	093	437	310	812	500	375	250
MS 24220-2	(a)	1125	562	312	187	062	460	254	1 000	385	312	166
MS 24220-3	(a)	1125	625	437	218	062	468	343	1 000	500	435	125
MS 24220-4	(b)	1125	812	468	250	062	688	375	1 000	562	468	240

(a) ARC 27 DYNAMOTOR LV BRUSHES

(b) DY63/ARC33 DYNAMOTOR LOW CURRENT BRUSHES

INCHES	MM	INCHES	MM	INCHES	MM
063	1 57	310	7 87	500	12 70
093	2 36	312	7 92	562	14 27
125	3 14	345	8 71	625	15 88
166	4 18	375	9 53	656	16 66
187	4 75	385	9 78	688	17 48
218	5 54	435	11 05	812	20 62
240	6 10	437	11 10	1 000	25 40
250	6 35	460	11 68	1 100	27 94
254	6 45	468	11 89	1 125	28 58

METRIC EQUIVALENTS (TO THE NEAREST 01 MM) ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1 INCH = 25 4 MM

USER ACTIVITIES

REVIEWER ACTIVITIES
AF-80
DSA-GS

This military standard is approved by the AFL/Engineering and Technical Support Division, Department of the Air Force and shall be used by that activity. All other military activities are required to employ this standard where suitable

APPROVED 4 JUNE 1956 REVISED (B) ENTIRE STANDARD REVISED

P A	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
AF-85 Other Cust		BRUSH-ELECTRICAL CONTACT, DYNAMOTOR LOW VOLTAGE	MS24220(USAF)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES AF DWG 56C12696		SHEET 2 OF 2

DD FORM 672-1

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202640-23T14:50Z
Check the source to verify that this is the current version before use.