

FED. SUP CLASS
5340

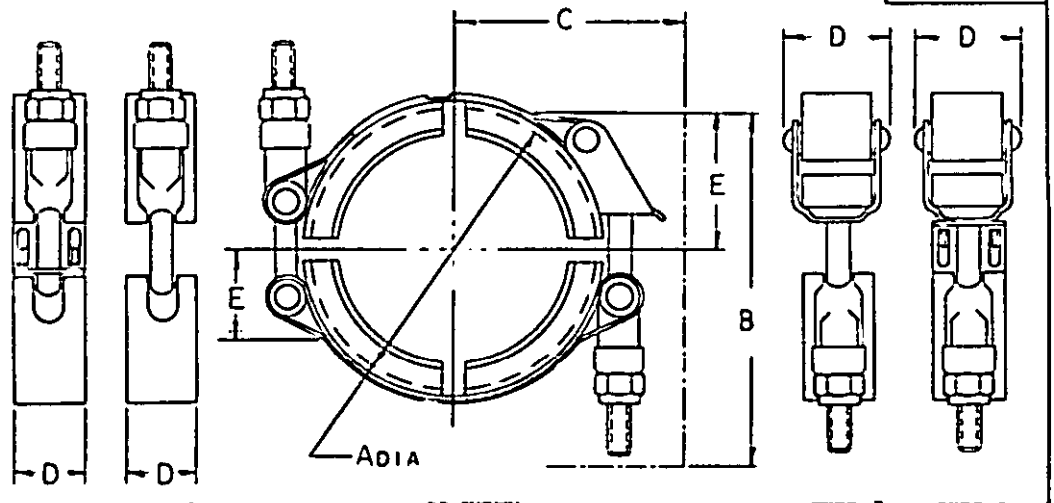

TYPE BL | TYPE B | TYPE BB SHOWN | TYPE B | TYPE BL

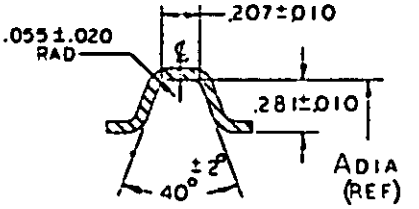

TYPICAL RETAINER SECTION
FOR ALL TYPES
SYMMETRICAL ABOUT ℄

MATERIAL: SEE PROCUREMENT SPECIFICATION
FINISH: SEE PROCUREMENT SPECIFICATION
REMOVE ALL BURRS AND SHARP EDGES
DIMENSIONS ARE IN INCHES
LATCH ELEMENTS ARE OPTIONAL WITHIN ENVELOPES SHOWN
ENVELOPE DIMENSIONS APPLY WHEN THE COUPLING IS IN THE TIGHTENED CONDITION AT THE MAXIMUM AND MINIMUM POSITIONS OF ITS DIAMETRAL RANGE.
EXAMPLES OF PART NUMBER: (00 REPRESENTS DASH NUMBER)

MS 27116 -00B	•	BASIC LATCH COUPLING
MS 27116 -00R	•	QUICK COUPLER LATCH COUPLING
MS 27116 -00BR	•	BASIC AND QUICK COUPLER COUPLING
MS 27116 -00BL	•	T-BOLT LATCH WITH REDUNDANT LATCH COUPLING
MS 27116 -00RL	•	QUICK COUPLER LATCH WITH REDUNDANT LATCH COUPLING
MS 27116 -00BRL	•	BASIC AND QUICK COUPLER LATCH WITH REDUNDANT LATCH COUPLING

QUICK COUPLER LATCH COUPLING SHALL CONTAIN ONLY ONE QUICK COUPLER LATCH
CERTAIN PROVISIONS OF THIS STANDARD (PROFILE DIMENSIONS AND FLANGE OD INCREMENT SIZE RANGES) ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ABC AIR STD 17/19. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIAN WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICES SO THAT APPROPRIATE ACTION MAY BE TAKEN RESPECTING THE INTERNATIONAL AGREEMENT CONCERNED.
FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

© ENTIRE STANDARD REVISED

APPROVED 5 MARCH 62 REVISED (A) 29 AUG 62 (B) 15 OCT 63 (C) 1 NOV 66

Review activities:
Navy - AS
MAP - 11

This military standard is approved by the Department of the Air Force and the NAVAL AIR SYSTEMS COMMAND and is mandatory for use by these activities. All other military activities are required to apply this standard where suitable.

P.A. USAF-11 Other Cust Navy - AS	TITLE COUPLING - CLAMP, GROOVED V-BAND 1.750 TO 14.250 FLANGE O D (-320°F TO +1500°F)	MILITARY STANDARD MS 27116(ASG)
PROCUREMENT SPECIFICATION MIL-C-27536	SUPERSEDES	SHEET 1 OF 2

DD FORM 672-1 (Existing coordination)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:16Z
Check the source to verify that this is the current version before use.

This military standard is approved by the Department of the Air Force and the NAVAL AIR SYSTEMS COMMAND and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

Review activities:
Navy - AS
USAF - 11

DD FORM 1427 SEP 61 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

P.A. USAF-11
Other Cust
Navy-AS

PROCUREMENT SPECIFICATION
MIL-C-27536

SUPERSEDES:

TITLE
COUPLING-CLAMP, GROOVED V-BAND
1.750 TO 14.250 FLANGE O D
(-320° F TO +1500° F)

MILITARY STANDARD

MS 27116(ASG)

SHEET 2 OF

DASH NO.	FLANGE OD MS24563	AXIAL LOAD RATING (LB)	A +.03 -.06 DIA	LATCH ENVELOPE B MAX B	B MAX BL	B MAX R	B MAX RL	C MAX B	C MAX BL	C MAX R	C MAX RL	D MAX B	D MAX BL	D MAX R	D MAX RL	E MAX B	E MAX BL	E MAX R	E MAX RL	MIN BOLT DIA	RATED TORQUE (LB IN.)	MAX WT (LB) B	MAX WT (LB) BL	MAX WT (LB) R	MAX WT (LB) RL
01	1.75	10,670	1.88					1.75		1.85											60	.39	.44	.43	.48
02	1.88	10,705	2.00					1.80		1.90												.40	.45	.44	.49
03	2.00	10,745	2.12					1.85		1.95												.41	.46	.45	.50
04	2.12	10,780	2.25					1.90		2.00												.42	.47	.46	.51
05	2.25	10,820	2.38					2.00		2.10		.80	.90	1.10	1.10	1.00		1.50		.250	65	.43	.48	.47	.52
06	2.38	10,855	2.50	4.00	4.50	4.50	5.00	2.05		2.15												.43	.48	.47	.52
07	2.50	10,890	2.62					2.10		2.20												.44	.49	.48	.53
08	2.62	10,930	2.75					2.20		2.30												.45	.50	.49	.54
09	2.75	10,970	2.88					2.25		2.35												.46	.51	.50	.55
10	2.88	16,750	3.00					2.45		2.50												.82	.92	.90	1.00
11	3.00	16,850	3.12					2.50		2.60											120	.84	.94	.92	1.02
12	3.12	17,000	3.25					2.60		2.65												.86	.96	.94	1.04
13	3.25	17,150	3.38					2.65		2.70												.88	.98	.96	1.06
14	3.50	17,300	3.62					2.75		2.85											125	.90	1.00	.98	1.08
15	3.75	17,600	3.88					2.90		2.95												.95	1.05	1.03	1.13
16	4.00	17,800	4.12					3.00		3.10		.95	1.00								130	.99	1.09	1.07	1.17
17	4.25	18,100	4.38					3.15		3.20												1.03	1.13	1.11	1.21
18	4.75	18,600	4.88					3.40		3.45											135	1.10	1.20	1.18	1.28
19	5.25	19,050	5.38					3.65		3.70												1.18	1.28	1.26	1.36
20	5.75	19,500	5.88	4.80	5.30	5.30	5.80	3.90		3.95				1.25	1.25	1.15		1.70		.312	140	1.25	1.35	1.33	1.43
21	6.25	20,000	6.38					4.15		4.20											145	1.67	1.82	1.75	1.90
22	6.75	20,600	6.88					4.40		4.45											150	1.75	1.90	1.83	1.98
23	7.25	21,000	7.38					4.65		4.70												1.82	1.97	1.90	2.05
24	7.75	21,650	7.88					4.90		4.95											155	1.91	2.06	1.99	2.14
25	8.25	22,000	8.38					5.15		5.20											160	1.99	2.14	2.07	2.22
26	8.75	22,700	8.88					5.40		5.45		1.20	1.25								165	2.07	2.22	2.15	2.30
27	9.25	23,250	9.38					5.65		5.70											170	2.15	2.30	2.23	2.38
28	9.75	23,800	9.88					5.90		5.95												2.22	2.39	2.30	2.45
29	10.25	24,300	10.38					6.15		6.20											175	2.31	2.46	2.39	2.54
30	10.75	24,850	10.88					6.40		6.45											180	2.39	2.54	2.47	2.62
31	11.25	25,350	11.38					6.65		6.70											185	2.47	2.62	2.55	2.70
32	11.75	25,900	11.88					6.90		6.95												2.55	2.70	2.63	2.78
33	12.25	26,450	12.38					7.15		7.20											190	2.62	2.77	2.70	2.88
34	12.75	27,000	12.88					7.40		7.45											195	2.71	2.86	2.79	2.94
35	13.25	27,500	13.38					7.65		7.70											200	2.79	2.94	2.87	2.02
36	13.75	28,050	13.88					7.90		7.95											205	2.87	3.02	2.95	3.10
37	14.25	28,550	14.38					8.15		8.20												2.94	3.09	3.02	3.17

APPROVED 5 MARCH 1962 REVISED C FOR CHANGES SEE SHEETS 1 AND 2

FED. SUP CLASS 5340

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:16Z
Check the source to verify that this is the current version before use.