
FED. SUP CLASS
6140

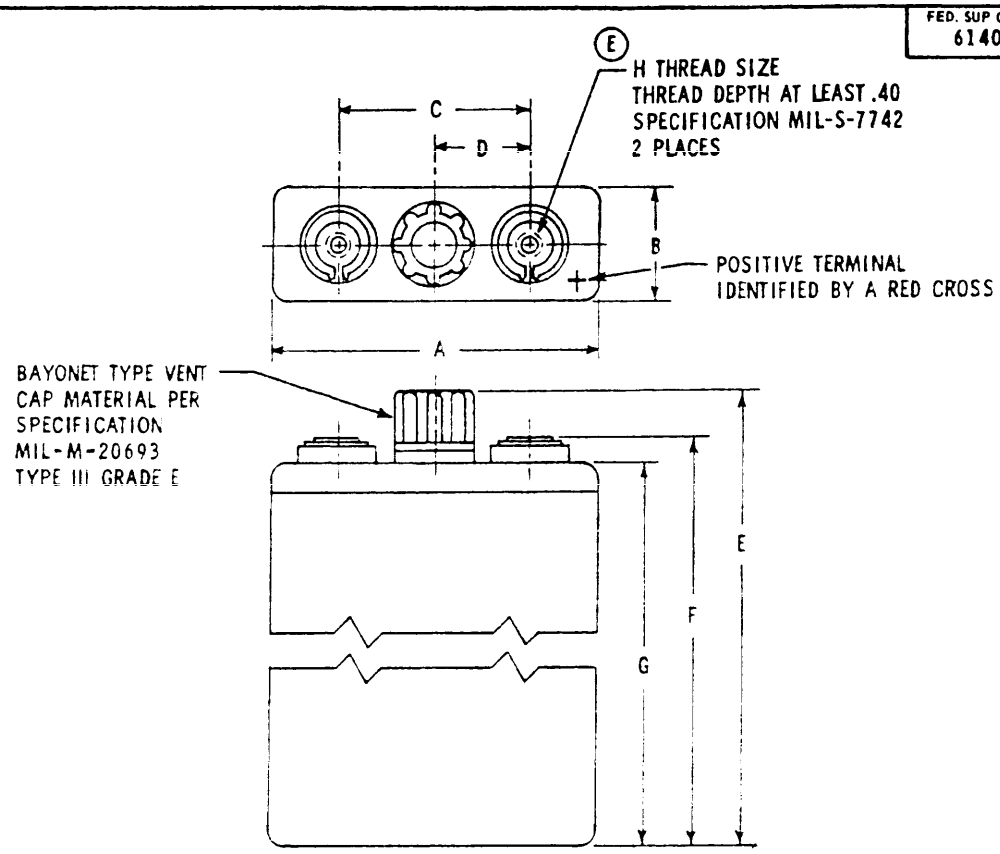

DASH NO.	USED IN	CAPACITY RANGE				DIMENSIONS							
		DISCH CUT-OFF VOLTS	TEMP °C	DISCH RATE AMPS	AMPERE HOUR	A +.015 −.050	B +.015 −.025	C ±.015	D ±.015	E MAX.	F +.015 −.030	G REF	H THREAD SIZE
-1	MS24496-1	1.0	27	5.5	$14^{+2.8}_{-0}$	2.414	1.065	1.624	.812	6.95	6.525	6.28	.164-32 UNC 2B
-2	MS24497-3	1.0	27	11	$25^{+5.0}_{-0}$	3.175	1.060	1.876	.938	8.28	7.869	7.61	.190-32 UNF 2B
-3	MS24498-1	1.0	27	17	$37^{+7.4}_{-0}$	3.130	1.375	2.050	1.025	9.40	8.932	8.68	.190-32 UNF 2B
-4	MS24496-2	1.0	27	5.5	$14^{+2.8}_{-0}$	2.414	1.065	1.624	.812	6.95	6.525	6.28	.164-32 UNC 2B
-5	MS24497-4 MS24497-5	1.0	27	11	$25^{+5.0}_{-0}$	3.175	1.060	1.876	.938	8.28	7.869	7.61	.190-32 UNF 2B
-6	MS24498-2	1.0	27	17	$37^{+7.4}_{-0}$	3.130	1.375	2.050	1.025	9.40	8.932	8.68	.190-32 UNF 2B

NOTES:
1. Dimensions are in inches.
2. Military Standard no., manufacturer's part no. and date of manufacture shall be located on top of cell. Example of date of manufacture, 12/65.
3. Referenced documents shall be of the issue in effect on date of invitations for bid.
4. For all cells that contain Permion 2291, the Military Standard no. shall be shown with a "P" as the final symbol. Example: MS27307-1P.
5. The MS27307-4, MS27307-5 and MS27307-6 cells are for use in the high discharge battery.

REVISED (A) 8 MAR 67 (B) 7 FEB 69 (C) 26 MAY 77 (D) 25 OCT 78 (E) 12 SEP 80

APPROVED 23 MAR 64

This military standard is approved for use by (Sacramento ALC MMIRE) Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

F.A. Air Force-99 Other Cust	INTERNATIONAL INTEREST	TITLE: CELL, BATTERY, AIRCRAFT STORAGE, NICKEL-CADMIUM	MILITARY STANDARD MS27307 (99)
PROCUREMENT SPECIFICATION MIL-B-26220	SUPERSEDES:		SHEET 1 of 1

DD FORM 672-1 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 6140-F540

Source: https://assist.dla.mil -- Downloaded: 202640-23T15:21Z
Check the source to verify that this is the current version before use.