


FED. SUP CLASS
5935

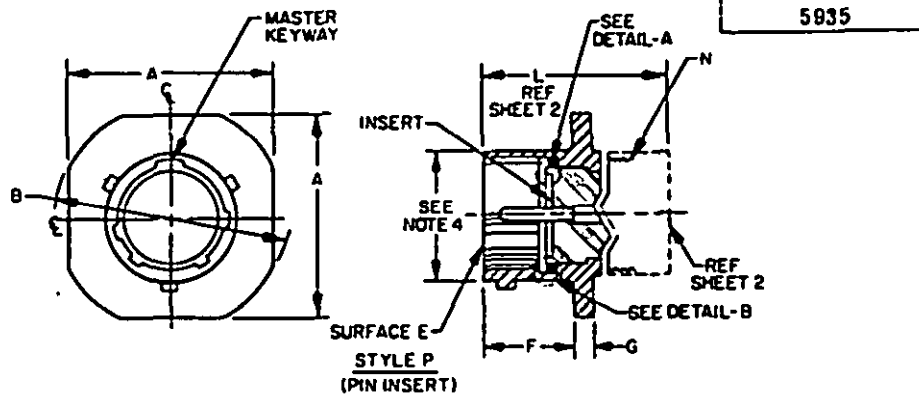




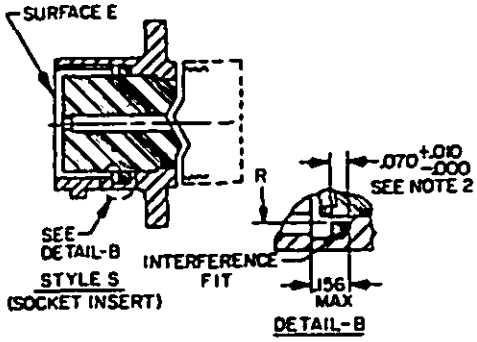

Classes E, F, J and P plugs

Size	A Max length side	B Dia ±.020 across flange corners	F +.031 -.000 Mtg flange location	G ±.016 Thk flange	N UNEF-2A accessory thread	R Max ID gasket
8	.828	.938	.400	.094	.4375-28	.329
10	.954	1.062			.5625-24	.457
12	1.047	1.156			.6875-24	.564
14	1.141	1.250			.8125-20	.689
16	1.234	1.344			.9375-20	.814
18	1.328	1.438			1.0625-18	.907
20	1.453	1.562	.535	.115	1.1875-18	1.039
22	1.578	1.688			1.3125-18	1.164
24	1.703	1.812	.568		1.4375-18	1.289

NOTES:
1. Dimensions are in inches.
2. Packing material shall meet the requirements of MIL-STD-417.
3. True position (TP) tolerances specified are in accordance with ANSI Y14.5-1973.
4. Intermateability dimensions shall be in accordance with MIL-C-26482.
5. For insert arrangements see MIL-STD-1669.
6. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
7. Referenced documents shall be of the issue in effect on date of invitations for bid.
8. Example of part number:

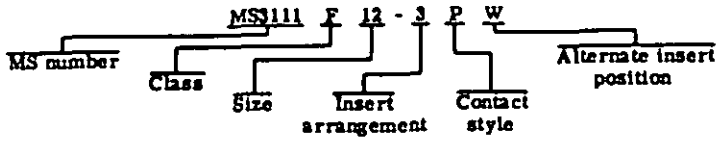

9. NOT FOR AIR FORCE USE, USE MS3476.

© FOR CHANGES SEE SHEET 2

APPROVED 7 Dec 65 REVISED (A) 15 Feb 67 (B) 5 SEPT 1975 © 19 Aug 76

User activities: Army AV, Navy, Air Force
Reviewer activities: Army EL, MU, MI, Navy SH, EC, Air Force 11, 17

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A Navy - AS / Other Cust Army - EL AF - 85	International interest	TITLE CONNECTORS, PLUG, ELECTRIC, SERIES 1, SOLDER TYPE, CABLE CONNECTING, BAYONET COUPLING	MILITARY STANDARD MS 3111
Procurement Specification MIL-C-26482		SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 63 672 (Copyright) 5935-2070-2

Source: https://assist.dla.mil - Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Reviewer activities: Army EL, MU, MI; Navy SH, EC; Air Force 11, 17

User activities: Army AV; Navy; Air Force

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

P.A Navy - AS

Other Cust Army - EL AF - 85

MIL-C-26482

Procurement Specification

International interest

SUPERSEDES:

TITLE CONNECTORS, PLUG, ELECTRIC, SERIES 1, SOLDER TYPE, CABLE CONNECTING, BAYONET COUPLING

MS 3111


MILITARY STANDARD

SHEET 2 OF 2

5935-2070-2


FED. SUP CLASS 5935

CLASS E

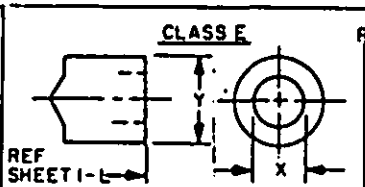

SIZE	L MAX OVER-ALL LENGTH	X DIA MIN ID	Y DIA MAX OD
8	1.328	.259	.608
10		.359	.734
12		.469	.858
14		.589	.984
16		.717	1.110
18		.779	1.234
20	1.531	.901	1.360
22		1.009	1.488
24	1.594	1.123	1.610


CLASS F

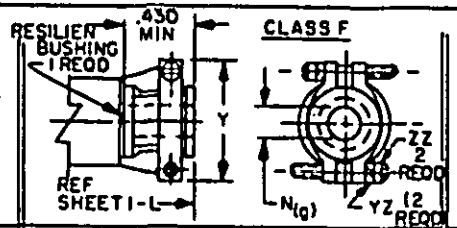

SIZE	L MAX OVER-ALL LENGTH	X DIA MIN OPEN	Y DIA MAX	W MAX CLOSED
8	1.922	.234	.828	.187
10		.297	.891	.187
12		.422	1.016	.281
14		.547	1.141	.325
16	2.047	.609	1.203	.356
18	2.078	.734	1.469	.456
20	2.344			.519
22		.922	1.656	
24	2.406	.984	1.750	.657

SIZE	N (h) ±.010 (g) FREE DIA	ZZ SCREW THREADS	YZ (h) LOCKWASHERS AN935 OR AN936 TYPES
8	.125	6-32UNC	AN935 B6L OR -6L AN936 A6B OR -A6
10	.188		
12	.312		
14	.375		
16	.500		
18	.625	8-32UNC	AN935 B8L OR -8L AN936 A8B OR -A8
20	.625		
22	.750		
24	.800		


DIMENSIONS WITH BUSHING REMOVED



(g) USE M3324/20 BUSHING IF REDUCED OPENING IS REQUIRED


(h) LOCKWASHERS MAY BE CAPTIVE

CLASS J

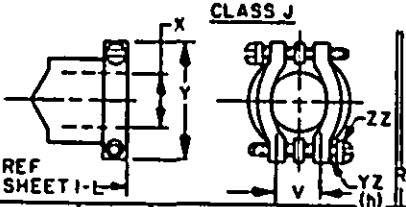

L MAX OVER-ALL LENGTH	W MAX CLOSED	X ID GLAND SEAL MIN. CLOSED	X ID GLAND SEAL RANGE OPEN	Y DIA MAX
2.271	.137	.168	.230	.828
	.187	.205	.312	.891
2.411	.281	.338	.462	1.016
2.599	.325	.416	.539	1.141
2.943	.356	.550	.616	1.203
3.172	.456	.600	.672	1.469
3.610	.519	.635	.787	
3.766		.670	.846	1.656
3.985	.657	.760	.898	1.750

CLASS P

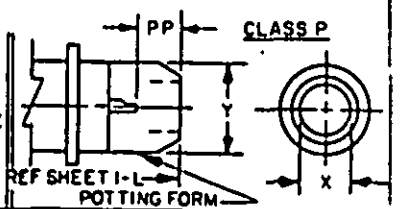

L MAX OVER-ALL LENGTH	X DIA MIN ID	Y DIA MAX OD	PP MIN
1.453	.317	.608	.250
	.434	.734	
	.548	.858	
	.673	.984	
	.798	1.110	
	.899	1.234	
1.672	1.024	1.360	
	1.149	1.488	
1.734	1.274	1.610	

APPROVED 7 Dec 65

REVISED (B) Entire standard revised (C) FOR CHANGES SEE SHEET 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.