
FED. SUP CLASS
6640

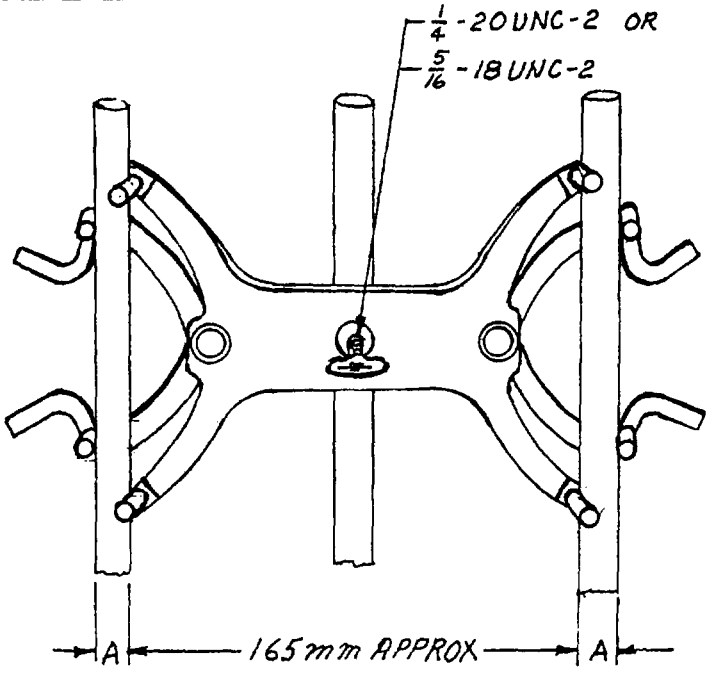

PART NUMBER	A BURET DIAMETER (mm)	BURET SIZES ACCOMMODATED (mL)
MS36017-1	5 to 20	micro to 100

MATERIAL: Clamp and clamp holders shall be of aluminum-base alloy in accordance with Federal Specification QQ-A-591, alloy No. A380 or zinc-base alloy in accordance with Federal Specification QQ-Z-363, Composition A.

Springs shall be of phosphor bronze in accordance with Federal Specification QQ-P-330, Composition A or corrosion-resisting steel in accordance with Federal Specification QQ-S-763, Class 202 or 302.

Sleeves shall be of rubber in accordance with MIL-STD-417, Type R or plastic formed by hot dipping the clamp jaw in a vinyl plastisol conforming to Military Specification MIL-P-20689, Type II or high quality non-raveling asbestos yarn.

Thumbscrew shall be forged aluminum in accordance with Federal Specification QQ-A-367, Composition 2017 or chemical resisting zinc alloy. Zinc-base alloy clamps and clamp holders may have copper alloy fittings in accordance with Federal Specification QQ-C-523 or QQ-C-525.

DESIGN: Holder shall be constructed of a one piece H-frame with vertical arms curved outward. The ends of each arm shall have a curved finger at right angle to the frame. Two spring actuated gripping arms each with a curved finger at right angle to the arm shall be attached to each side of the H-frame and aligned with the curved frame arms to form double clamps. Each side of the holder shall operate separately. Holder shall have a finger type clamp jaw to accommodate the buret and a V type holder jaw to accommodate a maximum of 11/16 inch diameter support rod.

© ENTIRE STANDARD REVISED

APPROVED 23 Dec 1959 REVISED (A) 15 Dec 1967 (B) 9 Dec 1975 (C) 4 OCT 1983

USER ACTIVITIES: ARMY - MD, DM
NAVY - MS

REVIEWER ACTIVITIES: ARMY - ME
AIR FORCE - 82

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. EA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust MS 99		HOLDER, BURET, DOUBLE	MS36017
Procurement Specifications NNN-C-440	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NUMBER 6640-1205

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:33Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6640

Threads shall be in accordance with Federal Handbook H28, Unified National Coarse Thread Series. Thumbscrew shall have 25 to 38 mm of thread.

NOTES:

1. Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements specified herein.

2. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

3. Referenced documents shall be of the issue in effect on date of invitations for bid.

4. FSCM: 20512, 22527, and 59728.

USER ACTIVITIES:

REVIEWER ACTIVITIES:

APPROVED REVISED

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. Other Cust	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD MS36017
Procurement Specifications	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NUMBER 6640-1205

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:33Z
Check the source to verify that this is the current version before use.