FED. SUP CLASS
9510

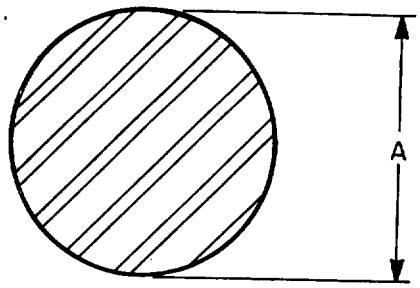


TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBER	A	HEAT TREATMENT	FORMING 1/ PROCESS	ADDITIONAL 2/ REQUIREMENTS
-001	.375	ANNEALED	C	NONE
-003	.375	INTERMEDIATE TEMPER	H	po
-005	.438	ANNEALED	H	po
-007	.500	ANNEALED	C	p
-009	.500	ANNEALED	H	po
-011	.500	INTERMEDIATE TEMPER	H	po
-013	.562	ANNEALED	H	po
-015	.625	ANNEALED	H	po
-017	.625	INTERMEDIATE TEMPER	H	po
-019	.750	INTERMEDIATE TEMPER	H	po
-021	.750	ANNEALED	H	po
-023	.812	ANNEALED	H	po
-025	.875	ANNEALED	H	po
-027	.875	INTERMEDIATE TEMPER	H	po
-029	1.000	INTERMEDIATE TEMPER	H	po
-031	1.000	ANNEALED	H	po
-033	1.125	ANNEALED	H	po
-035	1.250	ANNEALED	H	po
-037	1.250	INTERMEDIATE TEMPER	H	po
-039	1.375	ANNEALED	H	po
-041	1.500	ANNEALED	H	po
-043	1.500	INTERMEDIATE TEMPER	H	po
-045	1.625	ANNEALED	H	po
-047	1.750	INTERMEDIATE TEMPER	H	po
-049	2.000	INTERMEDIATE TEMPER	H	po
-051	2.000	ANNEALED	H	po
-053	2.250	ANNEALED	H	po
-055	2.500	ANNEALED	H	po
-057	2.500	INTERMEDIATE TEMPER	H	po
-059	3.000	INTERMEDIATE TEMPER	H	po
-061	3.000	ANNEALED	H	po
-063	3.250	INTERMEDIATE TEMPER	H	po
-065	3.875	ANNEALED	H	po
-067	4.000	ANNEALED	H	po
-069	5.000	ANNEALED	H	po

1/ SEE REQUIREMENT 3
2/ SEE REQUIREMENT 4

APPROVED 21 APR 87 REVISED

USER ACTIVITIES:
NAVY-OS

REVIEWER ACTIVITIES:
ARMY-AR, MI
AIR FORCE - 99
DLA - IS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense.
Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P. A. ARMY - MR Other Cust AIR FORCE-20	INTERNATIONAL INTEREST	TITLE BAR,METAL,ROUND, CORROSION RESISTANT STEEL, TYPE 416	MILITARY STANDARD MS500126
PROCUREMENT SPECIFICATION ASTM A582	SUPERSEDES:		PAGE 1 OF 2

AMSC N/A

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

9510-0574

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:48Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
9510

REQUIREMENTS:

1. MATERIAL: STEEL, CORROSION RESISTANT, TYPE 416 (UNS S41600) AS SPECIFIED IN PROCUREMENT DOCUMENT.

2. LENGTH: STANDARD LENGTH OF WIRE IS 10 FEET MINIMUM, 12 FEET MAXIMUM.

3. FORMING PROCESS: COLD FINISHED - CODE "C"
HOT FINISHED - CODE "H"

4. ADDITIONAL REQUIREMENTS:

POLISHED OVERALL - CODE "p"
PICKLED OVERALL - CODE "po"

5. PART NUMBER: THE PART NUMBER CONSISTS OF THE BASIC MS NUMBER, PLUS A DASH NUMBER FROM TABLE I.

EXAMPLE: MS500126-001
- (SEE TABLE I)
- BASIC MS NUMBER

6. MARKING: IRON AND STEEL PRODUCTS SHALL BE MARKED IN ACCORDANCE WITH FED-STD-183 WITH THE EXCEPTION THAT A PART NUMBER FROM THIS MILITARY STANDARD SHALL BE INCLUDED AS PART OF THE IDENTIFICATION MARKING.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.

2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

3. REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

USER ACTIVITIES:
NAVY-OS

REVIEWER ACTIVITIES:
ARMY-AR, MI
AIR FORCE - 99
DLA-IS

APPROVED 21 APR 87 REVISED

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P. A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ARMY - MR Other Cust AIR FORCE-20		BAR, METAL, ROUND, CORROSION RESISTANT STEEL, TYPE 416	MS500126
PROCUREMENT SPECIFICATION ASTM A582	SUPERSEDES:		PAGE 2 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 9510 - 0574

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:48Z
Check the source to verify that this is the current version before use.