
FED. SUP CLASS
2330

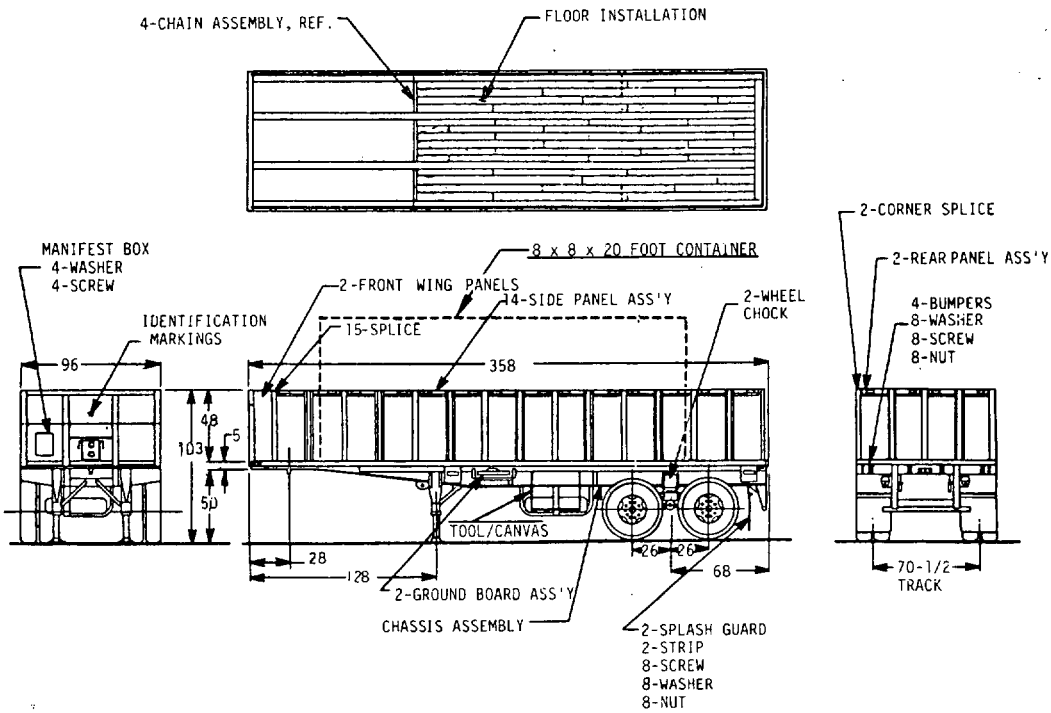

APPROVED 3 MAY 85 REVISED

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

P.A. ARMY-AT Other Cust	TITLE SEMITRAILER, FLAT BED: BREAKBULK/CONTAINER TRANSPORTER, 22-1/2 TON, M871.	MILITARY STANDARD MS52160(AT)
PROCUREMENT SPECIFICATION MIL-S-62272	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 87 672-1 LIMITED COORDINATION)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.

VEHICLE CHARACTERISTICS

PRIME MOVER:
5 TON M818 TRUCK TRACTOR
SECONDARY: M195 TRUCK TRACTOR 6 X 4
IMPROVED HIGHWAY USE ONLY

CURB WEIGHT:	BREAKBULK
W/O PAYLOAD	15,900 LBS (7,212 KG)
	CONTAINER(S)
W/O PAYLOAD	15,900 LBS (7,212 KG)
	BREAKBULK
PAYLOAD	45,000 LBS (20,412 KG)
	CONTAINER(S)
PAYLOAD	44,800 LBS (20,321 KG)
	BREAKBULK
GROSS WEIGHT	60,900 LBS (27,624 KG)
	CONTAINER(S)
GROSS WEIGHT	60,700 LBS (27,533 KG)

WEIGHT DISTRIBUTION:

	BREAKBULK
	(W/O PAYLOAD)
KINGPIN	4,753 LBS (2,156 KG)
	(W/PAYLOAD)
KINGPIN	24,033 LBS (10,901 KG)
	(W/O PAYLOAD)
AXLES	11,147 LBS (5,056 KG)
	(W/PAYLOAD)
AXLES	36,867 LBS (16,723 KG)
	(W/O PAYLOAD)
LANDING LEGS	7,688 LBS (3,487 KG)
	(W/PAYLOAD)
LANDING LEGS	38,869 LBS (17,631 KG)
	(W/O PAYLOAD)
AXLES	8,212 LBS (3,725 KG)
	(W/PAYLOAD)
AXLES	22,031 LBS (9,993 KG)

WEIGHT DISTRIBUTION:

	CONTAINERIZED
	(W/O PAYLOAD)
KINGPIN	5,680 LBS (2,576 KG)
	(W/PAYLOAD)
KINGPIN	25,381 LBS (11,513 KG)
	(W/O PAYLOAD)
AXLES	10,220 LBS (4,636 KG)
	(W/PAYLOAD)
AXLES	35,319 LBS (16,020 KG)
	(W/O PAYLOAD)
LANDING LEGS	9,177 LBS (4,163 KG)
	(W/PAYLOAD)
LANDING LEGS	41,048 LBS (18,619 KG)
	(W/O PAYLOAD)
AXLES	6,723 LBS (3,049 KG)
	(W/PAYLOAD)
AXLES	19,652 LBS (8,914 KG)

AXLES:
QUANTITY 2

HUBS:
QUANTITY 4

WHEELS:
TYPE 7388820
RIM SIZE 7-1/2 X 20
STUD CIRCLE DIA 11-1/4 IN (28.58 CM)
SPACING OF DUAL WHEELS 13 IN (33.27 CM)

TIRES:
SIZE 11.00 X 20-12 PLY, LOAD RANGE F
TREAD DESIGN HI-WAY
SPARE ONE
AIR PRESSURE 75 PSI
(ON & OFF HIGHWAY DRIVING)

HEIGHT OF KINGPIN PLATE: (UNCOUPLED)
50 + 1 IN

SHIPPING DATA:
CUBIC FEET (OVERALL)
2153 CUBIC FEET (60.966 CU M)
LENGTH 358 IN (909 CM)
WIDTH 96 IN (244 CM)
HEIGHT (BED) 55 IN (140 CM)

SERVICE BRAKES:
TYPE S-CAM, TWO SHOE
RESERVOIR TANK
CAPACITY 2,800 CUBIC IN (45,883.78 CU CM)
AIR ACTUATION

ELECTRICAL SYSTEM:
TYPE 12/24 VOLT LIGHTING

ADDITIONAL FEATURES:
TRANSPORTS ONE 20 FT (6.096 M)
TWO 10 FT (3.048 M)
THREE 6.66 FT (2.03) M)
FOUR 5 FT (1.520 M)
LONG CONTAINERS

AUXILLIARY TIE DOWN KIT: (20 REMOVABLE FITTINGS) OPTIONAL

TARPAULIN: 7979195

WHEEL BEARINGS: TAPER

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48093.

APPROVED 3 MAY 85 REVISED

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.