
FED. SUP CLASS
2330

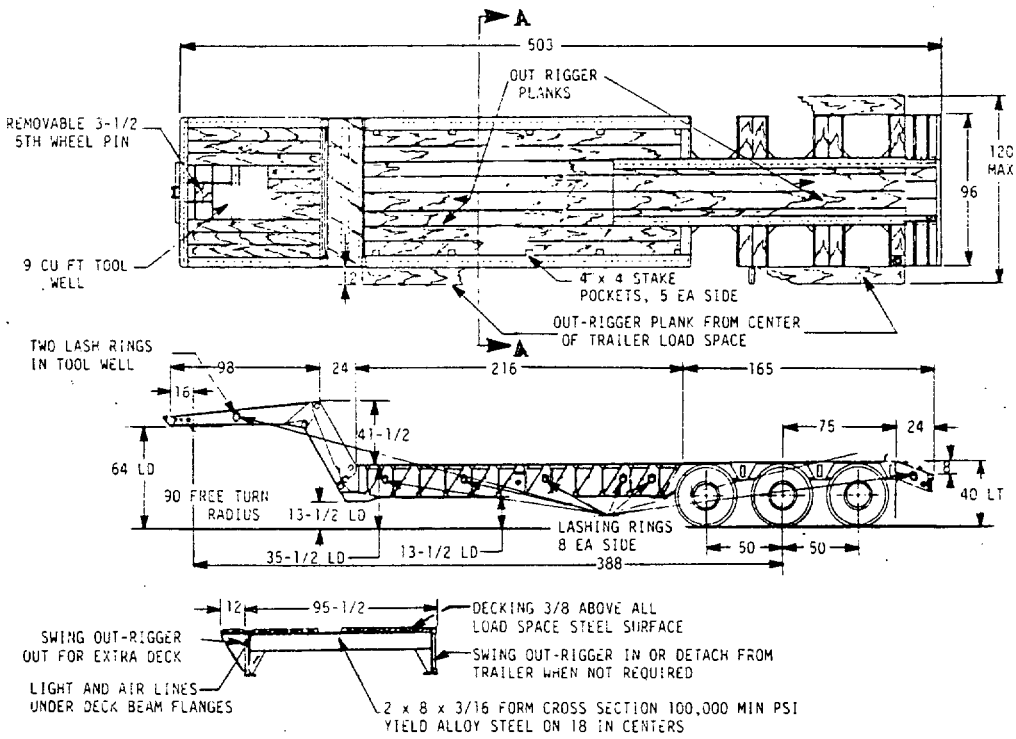

SECTION A - A

APPROVED 3 MAY 85 REVISED

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

P.A. ARMY - AT Other Cust	TITLE SEMITRAILER, LOW BED: CONSTRUCTION TRANSPORTER, 40 TON, M870.	MILITARY STANDARD MS52161(AT)
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 1 OF 2

DD FORM SEP 87 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2330

VEHICLE CHARACTERISTICS

PRIME MOVER: TRUCK, TRACTOR, 10-TON, 6 X 6

GENERAL USAGE: SEMITRAILER, LOW BED IS USED TO TRANSPORT PRACTICALLY ALL TRACKED AND WHEELED VEHICLES AND GENERAL CARGO UP TO 40 TONS.

KINGPIN: 3-1/2 IN. DIA
HEIGHT OF PLATE (UNCOUPLE) 64

DIMENSIONS:

LENGTH	503
WIDTH	96
HEIGHT	64

DECK DIMENSIONS:

LENGTH	216
WIDTH	96
HEIGHT, NORMAL	40

SHIPPING DIMENSIONS

SHIPPING CUBIC FEET	1680 CU. FT.

TREAD:

CENTER TO CENTER (TRACK)	71
GROUND CLEARANCE AT 15 TON LOAD (MINIMUM)	13-1/2

WEIGHTS:

CURB WEIGHT (COMPLETE) VEHICLE LESS CARGO	16,500 LBS.
MAXIMUM CARGO WEIGHT	80,000 LBS.
GROSS WEIGHT, INCLUDING CARGO	96,500 LBS.
WEIGHT DISTRIBUTION (EMPTY): ON REAR AXLES	11,000 LBS.
WEIGHT DISTRIBUTION (LOADED): ON FIFTH WHEEL FIFTH WHEEL OF TOWING VEHICLE	40,000 LBS.
ON REAR AXLES	56,500 LBS.

AXLES:

QUANTITY	3
TYPE	TUBULAR

WHEEL BEARINGS:

TYPE	TAPER
SUSPENSION WALKING BEAM SPRING COMB.	3 AXLE

HUBS:

QUANTITY LEFT STUDS	3
RIGHT STUDS	3

WHEELS:

TYPE	DISK
RIM SIZE	7-1/2 X 15 INCH
RIM TYPE	ADVANCE MILITARY
STUD DIAMETER	19-3/4 IN.
SPACING OF DUAL WHEELS	6-3/8 IN.

TIRES:

QUANTITY	12
SIZE	10.00 X 15
PLY	14
TYPE	COMMERCIAL
TREAD DESIGN	HIGHWAY TREAD

SERVICE BRAKES:
TYPE S-CAM, TWO SHOE, - DOUBLE ANCHOR, INTERNAL EXPANDING

ACTUATION: AIR

AIRBRAKE SYSTEM:
TYPE - AIR CHAMBER ACTUATED
AIR RESERVOIR TANK CAPACITY 1488 CU. IN.

ELECTRICAL SYSTEM:
TYPE - DUAL SYSTEM 12/24 VOLT

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.

APPROVED 3 MAY 85 REVISED

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

P.A. ARMY - AT Other Cust	TITLE SEMITRAILER, LOW BED: CONSTRUCTION TRANSPORTER, 40 TON, M870.	MILITARY STANDARD MS52161(AT)
PROCUREMENT SPECIFICATION	SUPERSEDES.	SHEET 2 OF 2

DD FORM 1 SEP 87 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.