
FED SUP CLASS
5305

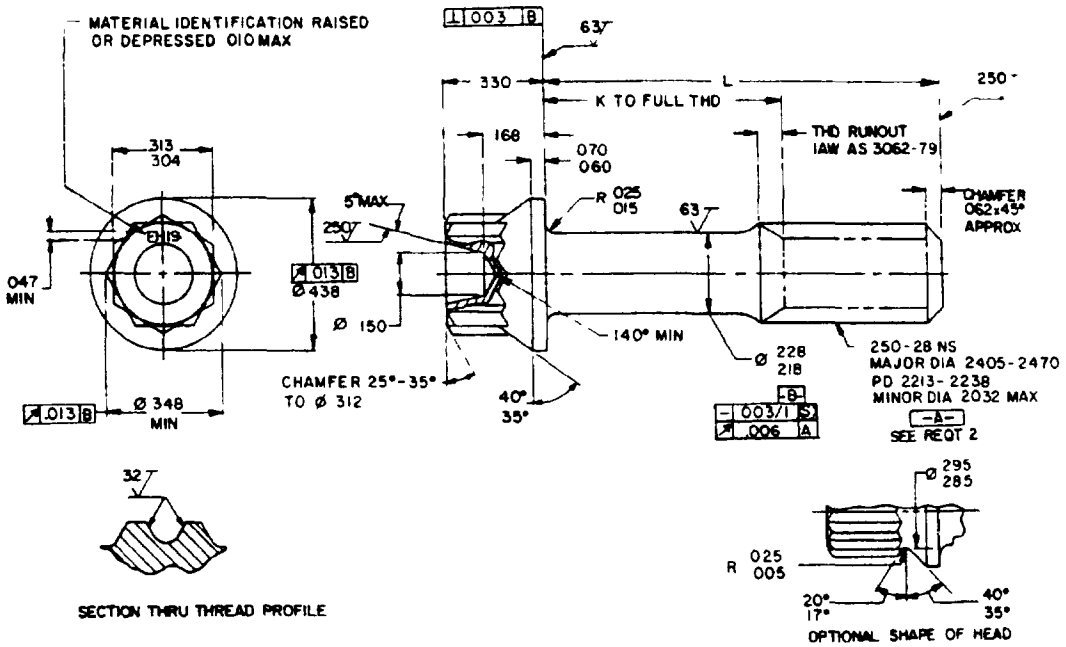

INACTIVE FOR DESIGN AFTER 6 APRIL 1967
NO SUPERSEDING STANDARD

TABLE I DASH NUMBERS AND DIMENSIONS

DASH NUMBER	L	K +.000 -.060	APPROX WEIGHT LBS/100
-06	.500	1/	1.29
-07	.562	1/	1.36
-08	.625	1/	1.44
-09	.688	1/	1.51
-10	.750	1/	1.58
-11	.812	1/	1.65
-12	.875	.125	1.72
-13	.938	.188	1.79
-14	1.000	.250	1.86
-15	1.062	.312	1.93
-16	1.125	.375	2.00
-17	1.188	.438	2.08
-18	1.250	.500	2.15
-19	1.312	.562	2.22
-20	1.375	.625	2.29
-21	1.438	.688	2.36
-22	1.500	.750	2.43
-23	1.562	.812	2.50
-24	1.625	.875	2.57
-25	1.688	.938	2.64
-26	1.750	1.000	2.72
-27	1.875	1.125	2.86
-28	2.000	1.250	3.00
-29	2.125	1.375	3.14
-30	2.250	1.500	3.29
-31	2.375	1.625	3.43
-32	2.500	1.750	3.57
-33	2.625	1.875	3.71
-34	2.750	2.000	3.85
-35	2.875	2.125	4.00
-36	3.000	2.250	4.14
-37	3.125	2.375	4.29
-38	3.250	2.500	4.43
-39	3.375	2.625	4.58
-40	3.500	2.750	4.72
-41	3.625	2.875	4.85
-42	3.750	3.000	4.99
-43	3.875	3.125	5.13
-44	4.000	3.250	5.27
-45	4.125	3.375	5.42
-46	4.250	3.500	5.56
-47	4.375	3.625	5.71
-48	4.500	3.750	5.85
-49	4.625	3.875	6.00
-50	4.750	4.000	6.14
-51	4.875	4.125	6.29
-52	5.000	4.250	6.43
-53	5.125	4.375	6.56
-54	5.250	4.500	6.70
-55	5.375	4.625	6.84
-56	5.500	4.750	6.99
-57	5.625	4.875	7.13
-58	5.750	5.000	7.28
-59	5.875	5.125	7.42
-60	6.000	5.250	7.57

DASH NUMBER	L	K +.000 -.060	APPROX WEIGHT LBS/100
-41	3.625	2.875	4.85
-42	3.750	3.000	4.99
-43	3.875	3.125	5.13
-44	4.000	3.250	5.27
-45	4.125	3.375	5.42
-46	4.250	3.500	5.56
-47	4.375	3.625	5.71
-48	4.500	3.750	5.85
-49	4.625	3.875	6.00
-50	4.750	4.000	6.14
-51	4.875	4.125	6.29
-52	5.000	4.250	6.43
-53	5.125	4.375	6.56
-54	5.250	4.500	6.70
-55	5.375	4.625	6.84
-56	5.500	4.750	6.99
-57	5.625	4.875	7.13
-58	5.750	5.000	7.28
-59	5.875	5.125	7.42
-60	6.000	5.250	7.57

1/ THREAD TO HEAD MAXIMUM TWO INCOMPLETE THREADS

(B) ENTIRE STANDARD REVISED

APPROVED 15 FEB 55 REVISED (A) 6 APR 67 (B) 29 AUG 86

USER ACTIVITIES

REVIEWER ACTIVITIES: DLA-IS

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable

AMSC N/A

P A	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
NAVY-AS Other Cust AIR FORCE-11		BOLT-MACHINE, 12 POINT HEAD HEAT RESISTANT STEEL 250-28 NS	MS9034
PROCUREMENT SPECIFICATION AMS 7478	SUPERSEDES:		PAGE 1 OF 2

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5305-1680

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:09Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5305

REQUIREMENTS

1 MATERIAL HEAT RESISTANT STEEL IN ACCORDANCE WITH AMS 5732

2 THREADS THREADS IN ACCORDANCE WITH MIL-S-7742 INCOMPLETE THREADS NOT TO ENTER FILLET

3 DIMENSIONING AND TOLERANCING DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14.5M

4 SURFACE TEXTURE SURFACE TEXTURE, UNLESS OTHERWISE SPECIFIED, SHALL BE 125 MICROINCHES EXCEPT UPSET HEAD IN ACCORDANCE WITH ANSI B46 1

5 FLUORESCENT PENETRANT INSPECTION FLUORESCENT PENETRANT INSPECTION SHALL BE IN ACCORDANCE WITH AMS 2645-83

6 TOLERANCE UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE FOR LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°

7 EDGES: BREAK SHARP EDGES 003-.015 UNLESS OTHERWISE SPECIFIED.

8 PART NUMBER THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE. MS9034-06

DASH NUMBER

BASIC MS NUMBER

MS9034-06 INDICATES BOLT, MACHINE, 12 POINT HEAD, HEAT RESISTANT STEEL, 250-28 NS; LENGTH .500

NOTES

1 ALL DIMENSIONS ARE IN INCHES

2 DO NOT USE UNASSIGNED PART NUMBERS.

3 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE

4 REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN

5 THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION

6 AS AND AMS ARE SAE PUBLICATIONS

7 SUBJECT TERM (KEY WORD) LISTING

BOLT, MACHINE, 12 POINT HEAD, HEAT RESISTANT STEEL

APPROVED 15 FEB 55 REVISED (B) FOR CHANGES SEE PAGES 1 AND 2

USER ACTIVITIES.

REVIEWER ACTIVITIES
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. NAVY-AS Other Cust AIR FORCE-11	INTERNATIONAL INTEREST	TITLE BOLT-MACHINE, 12 POINT HEAD HEAT RESISTANT STEEL 250-28 NS	MILITARY STANDARD MS9034
PROCUREMENT SPECIFICATION AMS-7478	SUPERSEDES:		PAGE 2 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5305-1680

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:09Z
Check the source to verify that this is the current version before use.