
FED. SUP CLASS
5935

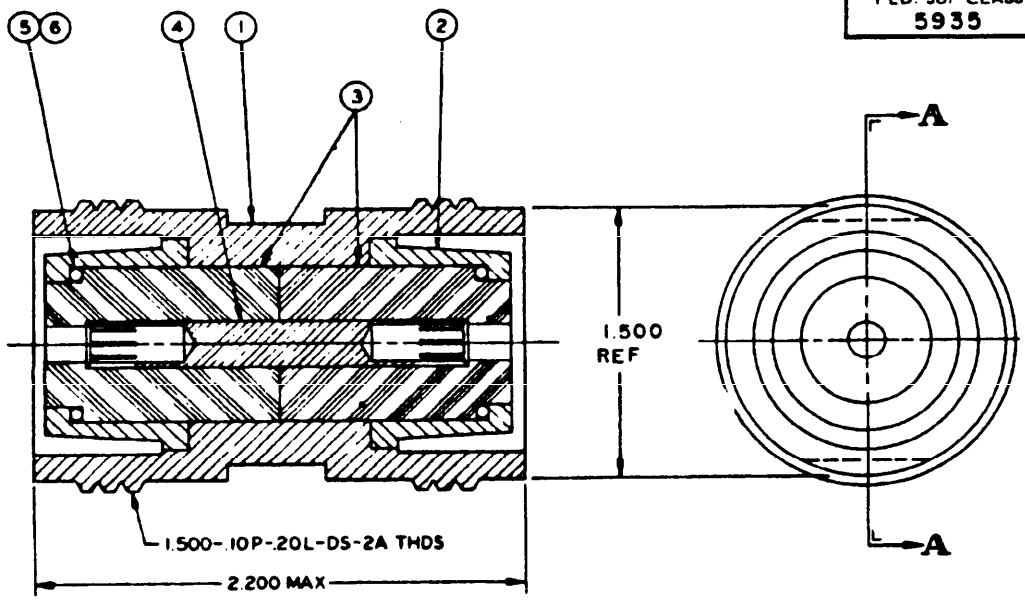

SECTION A-A

Item No.	Drawing number	Description	Qty
(A) 6	SM-B-424110	Lubricant	As req'd
(A) 5	SM-B-424112-2	'O' Ring	2
(A) 1	SM-C-424141	Body	1
(A) 3	SM-B-424142	Insulator	2
(A) 4	SM-B-424143	Conductor	1
(A) 2	SM-B-424149	Insert	2

MS PART NO.	MS90574-1373

INCHES	MM
.10	2.54
.20	5.08
1.500	38.10
2.200	55.88

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Packaging and packing of assembled items shall conform to MIL-A-27434.
4. Apply minute amount of lubricant to SM-B-424112-2 on assembly.
5. The part number consists of the MS military standard number followed by dash number. The dash '1373' is derived from assigned nomenclature.
6. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
7. Referenced documents shall be of the issue in effect on date of invitation for bids.

ENGINEERING DATA: Radio frequency, coaxial, connector adapter; nominal impedance, 50 ohms; rated at 1000 volts RMS; practical frequency limit 5 G Hz.

P.A. EL Other Cust EC 11	International Interest	TITLE ADAPTER, CONNECTOR (A) TYPE UG-1373/U, QL FEMALE-FEMALE	MILITARY STANDARD MS90574
Procurement Specification MIL-A-27434		SUPERSEDES: SM-C-424140 (A)	SHEET 1 OF 1

DD FORM 1 APR 66 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NO. 5935-1641 - 3

MC(@), CG(@), OS(@)
Navy EC+, AS(@)
EL+
Army MI;
19(@), 14(@)
AF 11+, 85+, 17+,

APPROVED 21 November 1967 REVISED (A) 25 July 1968

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:40Z
Check the source to verify that this is the current version before use.

CANCELLATION