FED SUP CLASS
5306

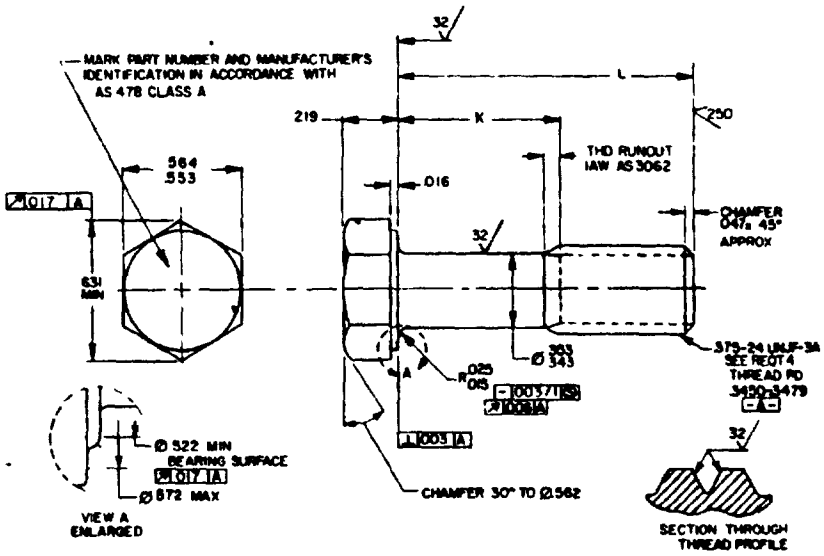


TABLE I DASH NUMBERS AND DIMENSIONS

DASH NUMBER	L	K	APPROX WEIGHT LB/100
-04	.625	.088- 108	3.35
-05	688	.088- .108	3.52
-06	.750	.088- .108	3.69
-07	812	.088- .108	3.86
-08	.875	.088- .108	4.03
-09	.938	.088- .108	4.20
-10	1.000	.088- .108	4.37
-11	1.062	.088- .108	4.53
-12	1.125	.088- .125	4 70
-13	1.188	.128- .188	4.87
-14	1.250	.190- .250	5.04
-15	1.312	252- .312	5.21
-16	1.375	315- 375	5 37
-17	1.438	.378- 438	5 54
-18	1 500	440- 500	5 71
-19	1.562	502- .562	5.88
-20	1.625	.565- .625	6.05
-21	1.688	.628- .688	6.21
-22	1.750	.690- .750	6.38
-23	1.875	.815- .875	6 72
-24	2.000	.940-1.000	7 05
-25	2 125	1.065-1 125	7 39
-26	2 250	1.190-1.250	7.73
-27	2 375	1.315-1 375	8.06
-28	2 500	1 440-1.500	8.40
-29	2.625	1 565-1 625	8.73
-30	2.750	1.690-1.750	9.07
-31	2.875	1.815-1 875	9.41
-32	3.000	1.940-2.000	9.74
-33	3.125	2.065-2.125	10 08
-34	3.250	2.190-2.250	10.41
-35	3.375	2.315-2.375	10.75
-36	3.500	2.440-2.500	11.09
-37	3.625	2.565-2.625	11.42
-38	3.750	2.690-2.750	11 76
-39	3 875	2.815-2.875	12.09
-40	4.000	2.940-3.000	12 43
-41	4.125	3.065-3.125	12.77
-42	4.250	3.190-3.250	13.10
-43	4 375	3 315-3.375	13 44
-44	4.500	3.440-3.500	13 77
-45	4.625	3.565-3.625	14.11
-46	4.750	3.690-3 750	14 45
-47	4.875	3.815-3.875	14.78
-48	5.000	3.940-4.000	15.12
-49	5.125	4.065-4.125	15 45
-50	5.250	4.190-4.250	15 79
-51	5 375	4 315-4.375	16.13
-52	5 500	4.440-4.500	16 46
-53	5.625	4.565-4.625	16.80
-54	5.750	4.690-4 750	17.13
-55	5.875	4.815-4.875	17.47
-56	6.000	4.940-5.000	17 81

APPROVED 2 FEB 68 REVISED Ⓐ 22 MAY 86

Ⓐ ENTIRE STANDARD REVISED

P.A. NAVY-AS Other Cust ARMY-AV AIR FORCE-99	INTERNATIONAL INTEREST	TITLE BOLT, MACHINE, HEXAGON HEAD, STEEL, CADMIUM PLATED, .375-24UNJF-3A	MILITARY STANDARD MS9521
PROCUREMENT SPECIFICATION AMS 7452	SUPERSEDES:		PAGE 1 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5306-0985

USER ACTIVITIES:

REVIEWER ACTIVITIES:
AIR FORCE-82
DLA-IS

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

MSC N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:19Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5306

REQUIREMENTS:

1. MATERIAL: IN ACCORDANCE WITH AMS 6322-80.
2. PROTECTIVE COATING AND SURFACE TREATMENT: CADMIUM PLATE IN ACCORDANCE WTIH AMS 2400-80. DIMENSIONS SPECIFIED ARE AFTER PLATING.
3. HARDNESS: 26-32 HRC.
4. THREADS: THREADS IN ACCORDANCE WITH MIL-S-8879.
5. SURFACE TEXTURE: SURFACE TEXTURE IN ACCORDANCE WITH ANSI B46.1. UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICRONCHES, EXCEPT HEXAGON.
6. DIMENSIONING AND TOLERANCING: DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14.5M.
7. HEAD TO SHANK FILLET: HEAD TO SHANK FILLET SHALL BE COLD ROLLED AFTER HEAT TREATMENT TO REMOVE ALL VISUAL EVIDENCE OF GRINDING OR TOOL MARKS EXCEPT DASH NUMBER SIZES -14 AND SMALLER.
8. TOLERANCE: UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE FOR LINEAR DIMENSIONS ± 010, ANGULAR DIMENSIONS ±5°.
9. MAGNETIC PARTICLE INSPECTION: MAGNETIC PARTICLE INSPECTION SHALL BE IN ACCORDANCE WITH AMS 2640-83.
10. EDGES: BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
11. PART NUMBER. THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE: MS9521-04
- -04 — DASH NUMBER
- MS9521 — BASIC MS NUMBER

MS9521-04 INDICATES - BOLT, MACHINE, HEXAGON HEAD, .375-24 UNJF-3A, LENGTH .625.

NOTES:

1. ALL DIMENSIONS IN INCHES.
2. DO NOT USE UNASSIGNED PART NUMBERS.
3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
4. REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
5. THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION
6. AS AND AMS ARE SAE PUBLICATIONS.

APPROVED 2 FEB 68 REVISED (A) FOR CHANGES SEE PAGES 1 AND 2

USER ACTIVITIES:

REVIEWER ACTIVITIES:
AIR FORCE-82
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for supportive new which be made from this document

P A	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
NAVY—AS (Other Coast) ARMY—AV AIR FORCE—99		BOLT, MACHINE, HEXAGON HEAD, STEEL, CADMIUM PLATED, .375-24 UNJF-3A	MS9521
PROCUREMENT SPECIFICATION AMS 7452	SUPERSEDES:		PAGE 2 OF 2

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5306-0985

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:19Z
Check the source to verify that this is the current version before use.