
MS9925 (ASG)

FED. SUP CLASS 5306

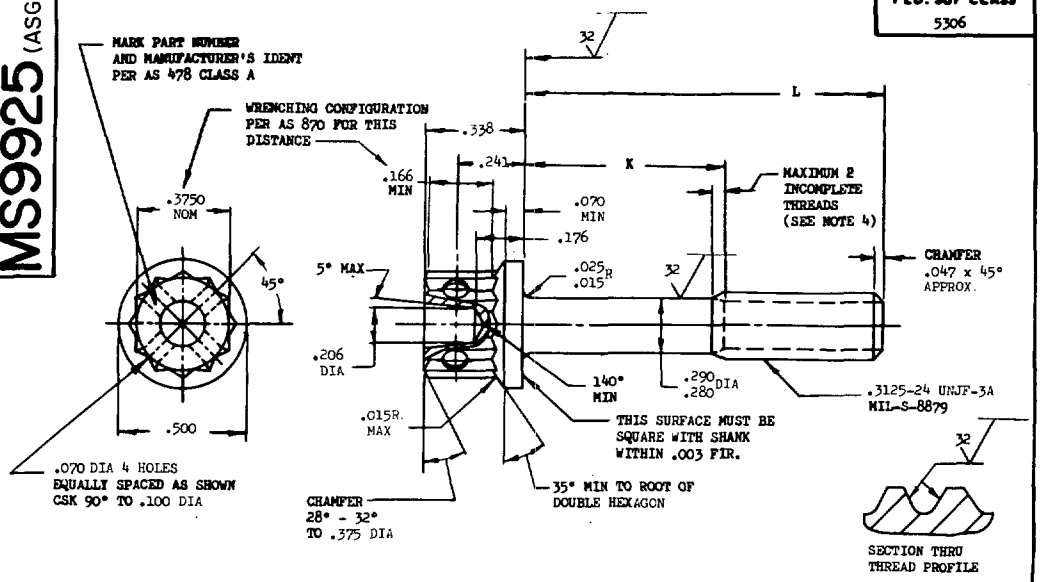

PART NO.	L	K	APPROX. WEIGHT LB/100
MS9925-04	.500	.088- .108	2.05
MS9925-05	.562	.088- .108	2.16
MS9925-06	.625	.088- .108	2.27
MS9925-07	.688	.088- .108	2.39
MS9925-08	.750	.088- .108	2.50
MS9925-09	.812	.088- .108	2.64
MS9925-10	.875	.088- .108	2.27
MS9925-11	.938	.088- .108	2.84
MS9925-12	1.000	.088- .125	2.95
MS9925-13	1.062	.128- .188	3.06
MS9925-14	1.125	.190- .250	3.17
MS9925-15	1.188	.252- .312	3.29
MS9925-16	1.250	.315- .375	3.40
MS9925-17	1.312	.378- .438	3.51
MS9925-18	1.375	.440- .500	3.62
MS9925-19	1.438	.502- .562	3.74
MS9925-20	1.500	.565- .625	3.85
MS9925-21	1.562	.628- .688	3.96
MS9925-22	1.625	.690- .750	4.08
MS9925-23	1.688	.752- .812	4.19
MS9925-24	1.750	.815- .875	4.30

PART NO.	L	K	APPROX WEIGHT LB/100
MS9925-25	1.812	.878- .938	4.41
MS9925-26	1.875	.940-1.000	4.53
MS9925-27	1.938	1.002-1.062	4.64
MS9925-28	2.000	1.065-1.125	4.75
MS9925-29	2.125	1.190-1.250	4.98
MS9925-30	2.250	1.315-1.375	5.20
MS9925-31	2.375	1.440-1.500	5.43
MS9925-32	2.500	1.565-1.625	5.66
MS9925-33	2.625	1.690-1.750	5.88
MS9925-34	2.750	1.815-1.875	6.11
MS9925-35	2.875	1.940-2.000	6.33
MS9925-36	3.000	2.065-2.125	6.56
MS9925-37	3.125	2.190-2.250	6.78
MS9925-38	3.250	2.315-2.375	7.01
MS9925-39	3.375	2.440-2.500	7.24
MS9925-40	3.500	2.565-2.625	7.46
MS9925-41	3.625	2.690-2.750	7.69
MS9925-42	3.750	2.815-2.875	7.91
MS9925-43	3.875	2.940-3.000	8.14
MS9925-44	4.000	3.065-3.125	8.37
MS9925-45	4.125	3.190-3.250	8.59

PART NO.	L	K	APPROX WEIGHT LB/100
MS9925-46	4.250	3.315-3.375	8.82
MS9925-47	4.375	3.440-3.500	9.04
MS9925-48	4.500	3.565-3.625	9.27
MS9925-49	4.625	3.690-3.750	9.49
MS9925-50	4.750	3.815-3.875	9.72
MS9925-51	4.875	3.940-4.000	9.95
MS9925-52	5.000	4.065-4.125	10.17
MS9925-53	5.125	4.190-4.250	10.40
MS9925-54	5.250	4.315-4.375	10.62
MS9925-55	5.375	4.440-4.500	10.85
MS9925-56	5.500	4.565-4.625	11.07
MS9925-57	5.625	4.690-4.750	11.30
MS9925-58	5.750	4.815-4.875	11.53
MS9925-59	5.875	4.940-5.000	11.75
MS9925-60	6.000	5.065-5.125	11.98

1. SHANK SHALL BE STRAIGHT WITHIN .003 PER INCH OF BOLT LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .008 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: STEEL AMS 6322.
6. HARDNESS: ROCKWELL C26-32.
7. FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS SPECIFIED ARE AFTER PLATING.
8. MANUFACTURING SPECIFICATION: AMS 7452 EXCEPT HEAD SHALL BE UPSET.
9. HEAD TO SHANK FILLET SHALL BE COLD WORKED.
10. MAGNETIC PARTICLE INSPECTION PER AMS 2640 AFTER PLATING.
11. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
12. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
13. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
14. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION.

APPROVED 15 Aug 69 REVISED

This military standard is approved by the Department of the Air Force and the Bureau of Naval Weapons and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

Review activities: USAF - 82, 85

P.A. USAF - 11 Other Cust Navy - AS	TITLE: BOLT, MACHINE - DOUBLE HEXAGON EXTENDED WASHER HEAD, DRILLED, PD SHANK, STEEL AMS 6322, CADMIUM PLATED, .3125-24 UNJF-3A	MILITARY STANDARD MS9925 (ASG)
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Limited coordination)
ASG use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1969-393-065/5-1794

DATE

DRAWN BY _____ _____
TYPED BY _____ _____
CHECKED BY _____ _____

NOTES TO PRINTER: REDUCE BORDER TO 6-27/32x9-3/4. PRINT LEFT BORDER-LINE ONE INCH FROM LEFT EDGE OF 8x10-1/2 SHEET. PRINT BOTTOM BORDER LINE 3/8 INCH FROM BOTTOM EDGE OF 8x10-1/2 SHEET. SIGNATURE FORM NOT TO BE INCLUDED ON 8x10-1/2 SHEET.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:28Z
Check the source to verify that this is the current version before use.