A-A-50882B
15 June 1990
SUPERSEDING
A-A-50882A
17 June 1988

COMMERCIAL ITEM DESCRIPTION

PAIL, UTILITY

(Corrosion-Resisting Steel)

The General Services Administration has authorized the use of this Commercial Item Description as a replacement for Federal Specification RR-P-53C which is cancelled.

This Commercial Item Description covers a corrosion-resisting steel utility pail.

Salient characteristics:

The utility pail shall be a conventional, corrosion-resisting steel pail with pail supplied in the following sizes:

Size I - 9 quart minimum capacity
Size II - 12 quart minimum capacity

The pail shall be seamless and formed from a single piece of corrosion-resisting steel of American Iron and Steel Institute (AISI) type 300 or 304. The steel shall be a minimum of 0.0478 inch thick (No. 18 U.S. Standard Gage), which shall not be reduced below 0.012 inch thick at any point in the finished pail. The surface of the pail bottom shall be flat or bowed slightly upward to form a stable bearing surface free from rock, wobble, or spin. The top rim of the pail shall be flared outward. An unbeaded rim shall be acceptable. The 9 quart pail shall have dimensions in accordance with figure 1. The 12 quart pail shall have dimensions in accordance with figure 2.

AMSC N/A FSC 7240
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:48Z
Check the source to verify that this is the current version before use.


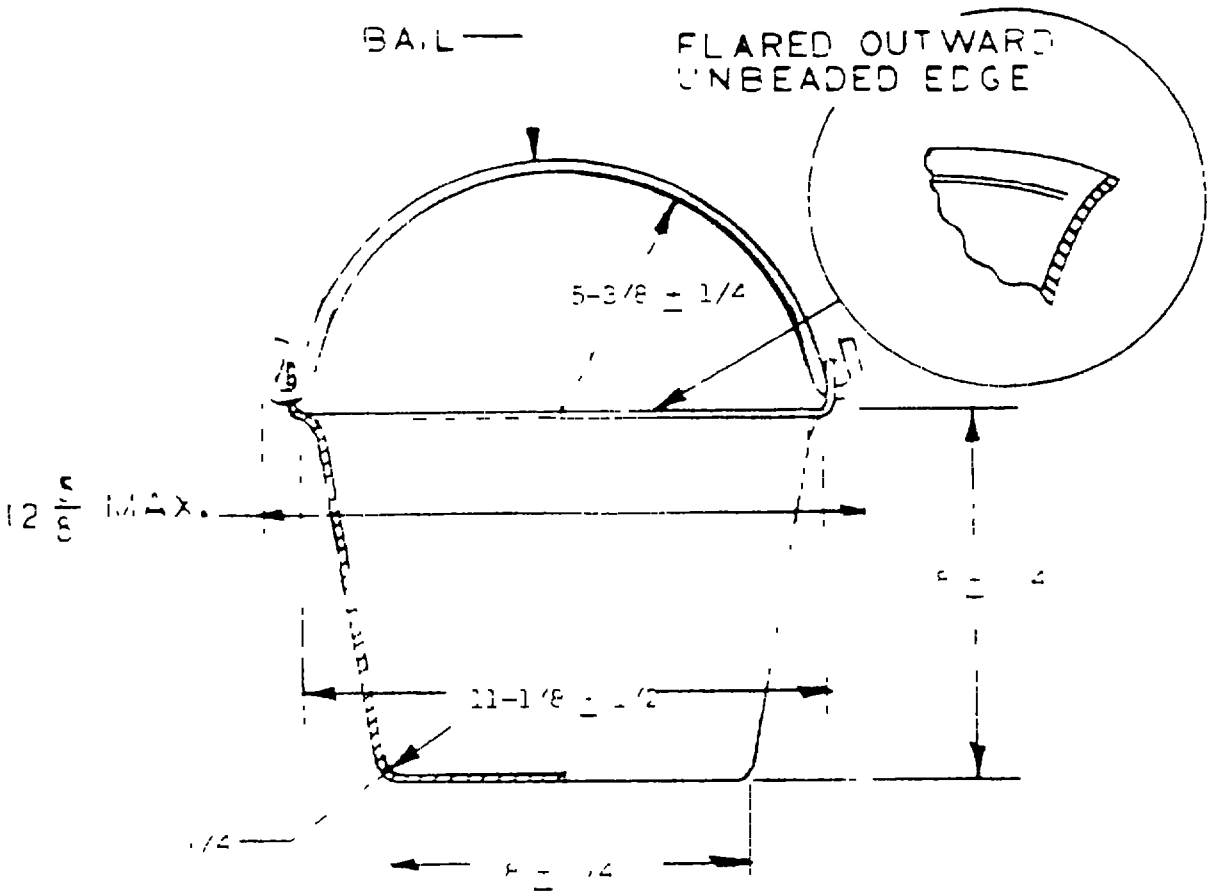


FIGURE 1. Pail, utility, 9 quart (Size 1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:48Z
Check the source to verify that this is the current version before use.

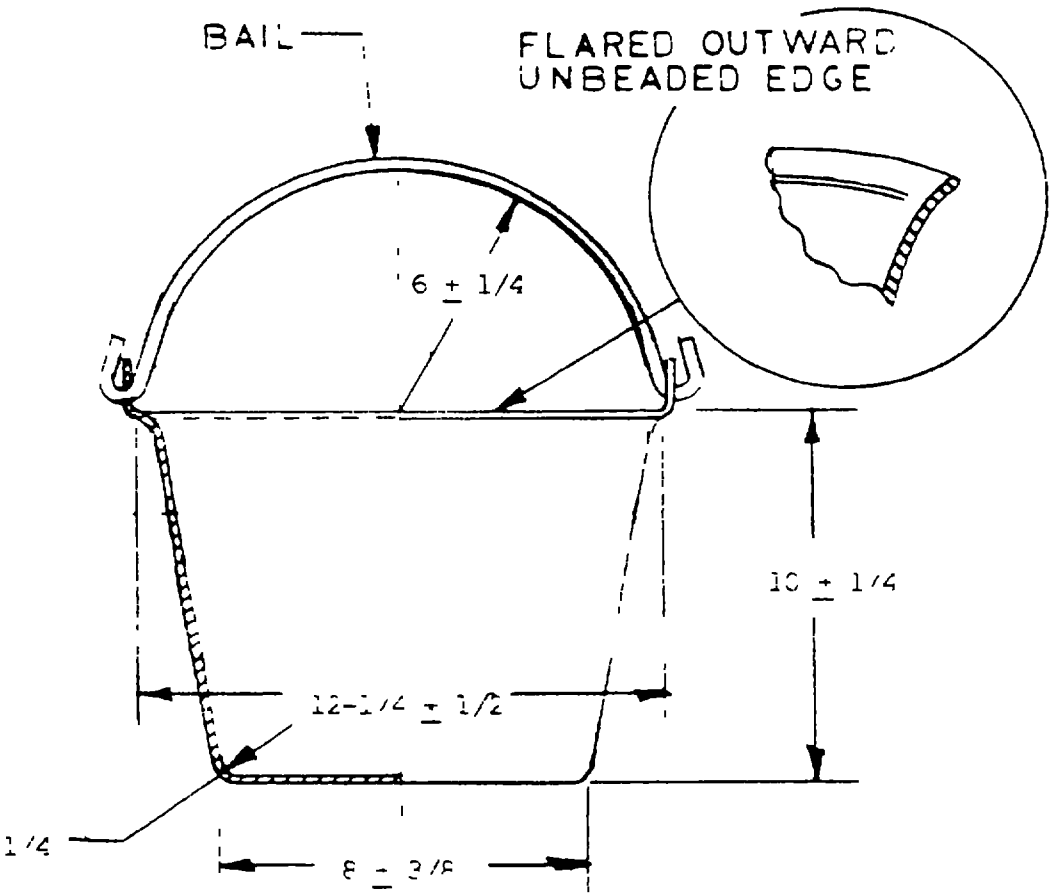

ALL DIMENSIONS ARE IN INCHES

FIGURE 2. Pail, utility, 12 quart (Size II)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:48Z
Check the source to verify that this is the current version before use.

The bail ear shall be fabricated from corrosion-resisting steel. The bail ears shall be located diametrically opposite each other on the upper edge of the body. The bail ears, on the size II pail, shall be designed to enable the bail to rest in a horizontal position. The bail ears on the size I pail shall not prevent the bail from resting against the upper rim of the pail body. As an alternate to being formed from the same piece as the body of the pail, bail ears attached by welding shall be acceptable. A fusion weld at the joint between the edge of the rim and the bail ear shall be required. Spot welding of the bail ear to the underside of the rim in addition to the fusion weld shall be acceptable.

The bail shall be formed from not less than 1/4 inch round stock corrosion-resisting steel. The bail ends shall be turned up and inward to form an open eyelet. The bail shall be semi-circular in shape and shall not be provided with a bail or grip piece. The grip area of the bail shall not extend beyond the edge of the rim. The bail loops shall be secure in the bail ears. The bail shall pivot freely and easily within its range of travel.

Welds shall be durable and sound in every detail. Welds shall be cleaned in accordance with the best commercial practice. All welds shall be ground smooth so as to blend in with the adjacent surfaces. All pits, extrusions, and discoloration of spot welds shall be eliminated.

The pail finish shall be equal to, or better than, a No. 4 commercial finish. The pail shall be thoroughly cleaned to remove foreign particles such as dirt, grease, graphite, and metal.

The pail shall be free from rough grind marks, trimming marks, pits, scales, cracks, tears, ripples, dents or other defects or imperfections. All pail surfaces shall have a smooth finish and shall be free from sharp edges.

Workmanship. The utility pail shall be free from defects which detract from its appearance or impair its serviceability.

Unit. Each (EA). One pail, as specified, constitutes one unit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:48Z
Check the source to verify that this is the current version before use.

Quality Assurance Provisions.

Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

Inspection. Inspection, as used herein, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures, and testing (determination by technical means of physical and chemical properties) of the item.

Sampling for examination. Sampling for examination shall be conducted in accordance with MIL-STD-105, with an AQL of 4.0 (percent defective) and an inspection level of II. The unit of product for examination purposes shall be one utility pail.

Sampling for tests. Sampling for the dimensional test shall be conducted in accordance with MIL-STD-105, with an AQL of 2.5 (percent defective) and an inspection level of S-3. Sampling for a capacity test shall have an acceptance level of zero. A test failure shall cause a rejection of the entire lot. The unit of product for test purposes shall be one utility pail.

Tests. Tests shall be conducted to determine compliance with specification requirements. Where feasible, the same sample shall be used for the determination of two or more test characteristics.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:48Z
Check the source to verify that this is the current version before use.

Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within the tolerances specified using conversion tables contained in the latest revision of Federal Standard 376, and all other requirements of this document are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units, a request should be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

Contractor certification. The contractor shall certify that the product offered meets the salient characteristics of this description and conforms to the producers' own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Regulatory requirements.

Federal Food, Drug and Cosmetic Act. If the product covered by this document has been determined by the U.S. Food and Drug Administration to be under its jurisdiction, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of the Federal Food, Drug and Cosmetic Act, as amended, and regulations promulgated thereunder. In addition, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of all other applicable Federal, State, and local statutes, ordinances, and regulations.

Recovered materials. The offeror/contractor is encouraged to use recovered material in accordance with Public Law 94-580, as amended, and as implemented by Federal Acquisition Regulation Subpart 23.4 to the maximum extent practical.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:48Z
Check the source to verify that this is the current version before use.

Preservation, packaging, packing, labeling, and marking. Unless otherwise specified, preservation, packaging, and packing shall be to a degree of protection to preclude damage to containers and/or contents thereof under normal shipping conditions, handling, etc., involving shipment from the supply source to the receiving activity, plus reshipment from receiving activity, and shall conform to applicable carrier's rules and regulations. Intermediate and exterior package quantities and labeling and marking shall be as specified in the contract and/or order.

Ordering data. Intermediate/exterior package quantities, labeling, and marking must be specified in the contract and/or order.

NOTES: 1. The following National Stock Numbers are covered by this document:

7240-00-772-5945 (Size I)
7240-00-773-0975 (Size II)

2. The size I pail is a component of 6545-00-939-1445, Utensil Set. The size II pail shall be suitable for use with NSN 6530-00-773-1450, Carriage, Pail, Corrosion-Resisting Steel.

MILITARY INTERESTS:

Custodians:

Army - MD
Navy - MS
Air Force - 03

PREPARING ACTIVITY:

DoD - MB

Agent:

DLA-DM

CIVIL AGENCY COORDINATING ACTIVITIES:

VA-OSS
PHS
FDA-MPQAS

Project No. 7240-0250

Location: CID/PAIL/H13-30

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:48Z
Check the source to verify that this is the current version before use.